

Remarks

Summary

Corrected formal drawings are attached to overcome the drawing objection, Claims 18 and 22 have been amended to overcome a formal objection thereto, and a sworn translation of the priority document is being submitted to overcome the substantive rejections. Therefore, the application is now in allowable form.

Status of the claims

Claims 12-23 are pending. Claims 18 and 22 have been amended. Claims 12, 22, and 23 are independent.

Requested action

Applicants respectfully request the Examiner to reconsider and withdraw the outstanding objections and rejections in view of the foregoing amendments and the following remarks.

Drawing objection

The Examiner objects to the drawings because of minor informalities therein. In response, while not conceding the propriety of the objection, Applicants are submitting corrected formal drawings of Figures 1-48. The corrected drawings include the changes proposed in the July 22, 2003 Request for Approval of Drawing Changes.

Formal claim objection

Claims 18-22 are objected to because of minor informalities in Claims 18 and 22. In response, while not conceding the propriety of the objection, Claims 18 and 22 have been amended to address the points raised by the Examiner.

Allowable subject matter

The Examiner has indicated that Claims 18-21 are objected to as being dependent upon a rejected base claim, but would be allowed if rewritten in independent form including all of the limitations of the base claim and any intervening claims.

Applicants gratefully acknowledge the indication that Claims 18-21 contain allowable subject matter. Since Claims 18 and 22 have been amended to overcome the formal objection, Applicants submit that these claims are now in allowable form.

Substantive rejections

Claims 12-16, 17/12, 17/16, 22, and 23 are rejected under 35 U.S.C. § 102(a) and § 102(e) as being anticipated by U.S. Patent Appln. Publication No. 2001/0026707 (Miyabe, et al.).


In response, while not conceding the propriety of the rejections, Applicants are filing a sworn translation of the priority document, which overcomes the rejections, since the filing date of the priority document is before the U.S. filing date of the Miyabe, et al. publication.

In view of the above amendments and remarks, the claims are now in allowable form.

Therefore, early passage to issue is respectfully solicited.

Applicants' undersigned attorney may be reached in our Washington, D.C. office by telephone at (202) 530-1010. All correspondence should continue to be directed to our below listed address.

Respectfully submitted,

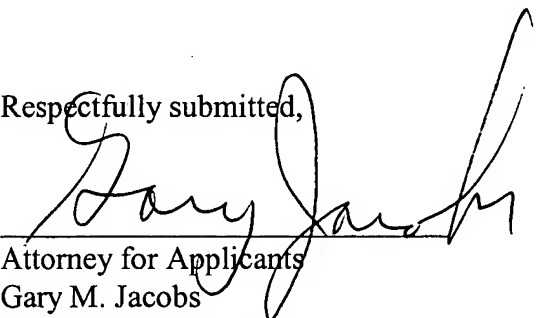

Attorney for Applicants
Gary M. Jacobs
Registration No. 28,861

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile: (212) 218-2200
DCMain152524v1

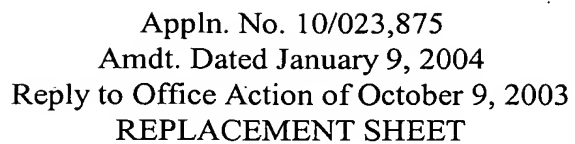


FIG. 1

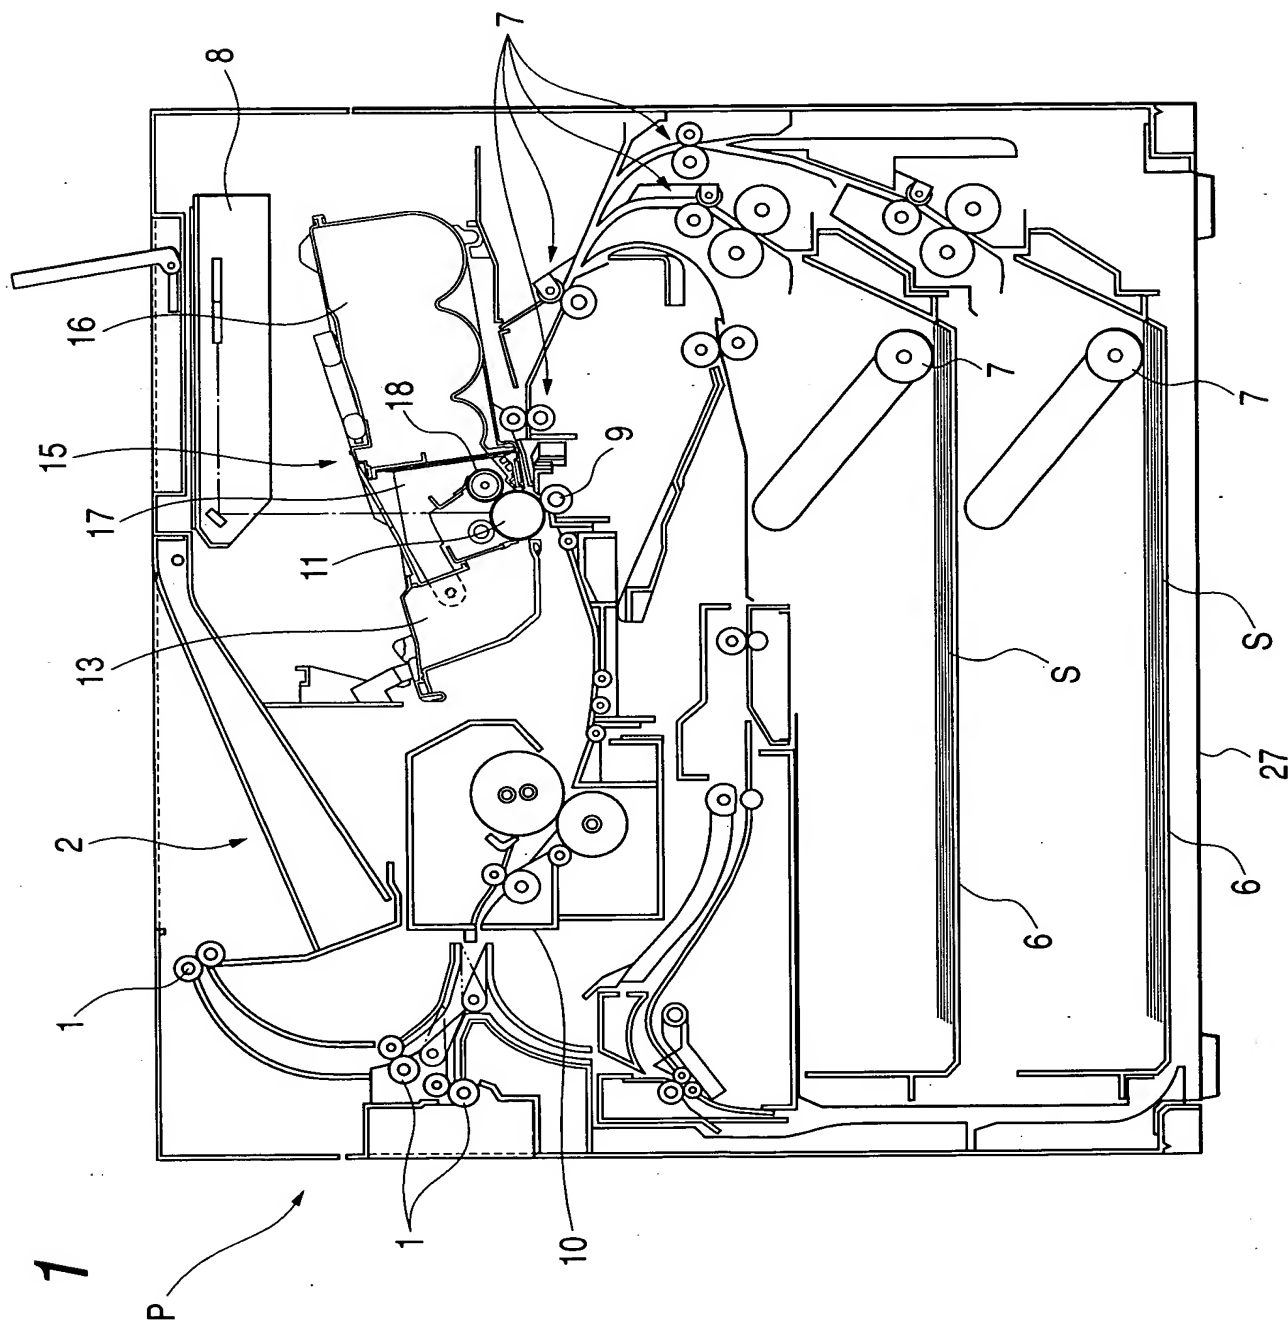




FIG. 2

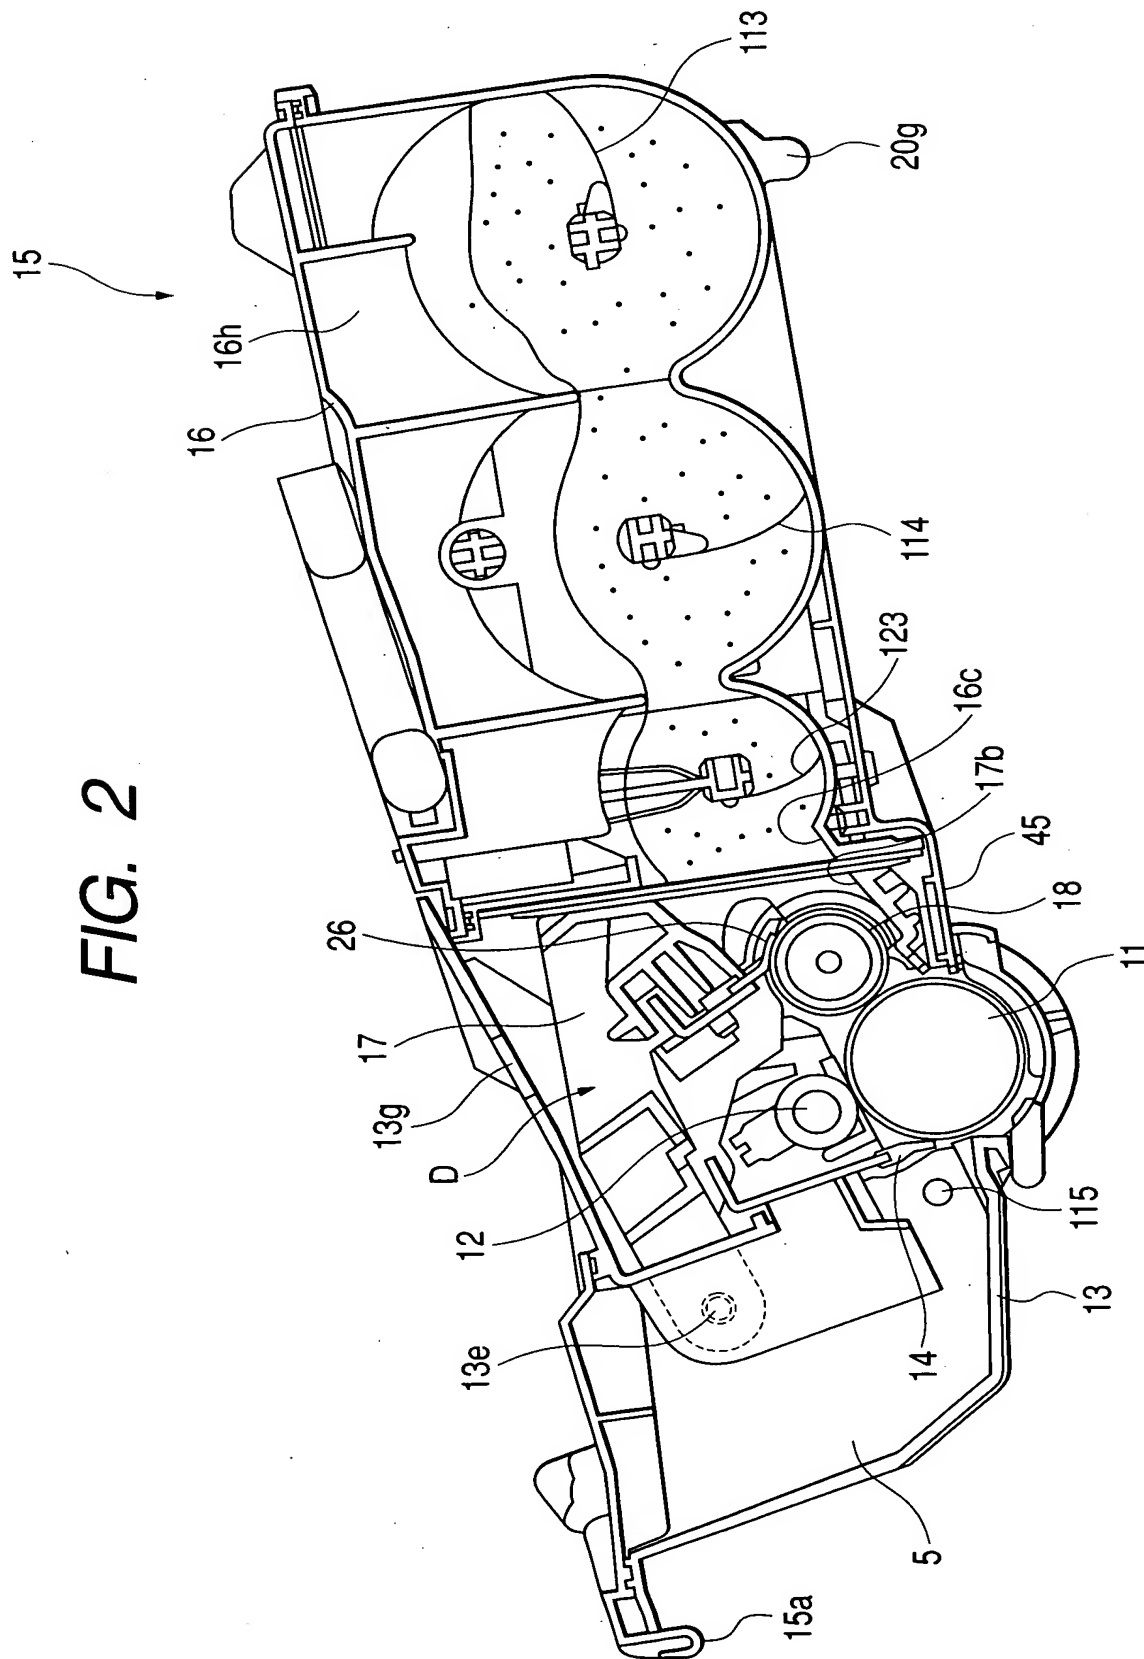




FIG. 3

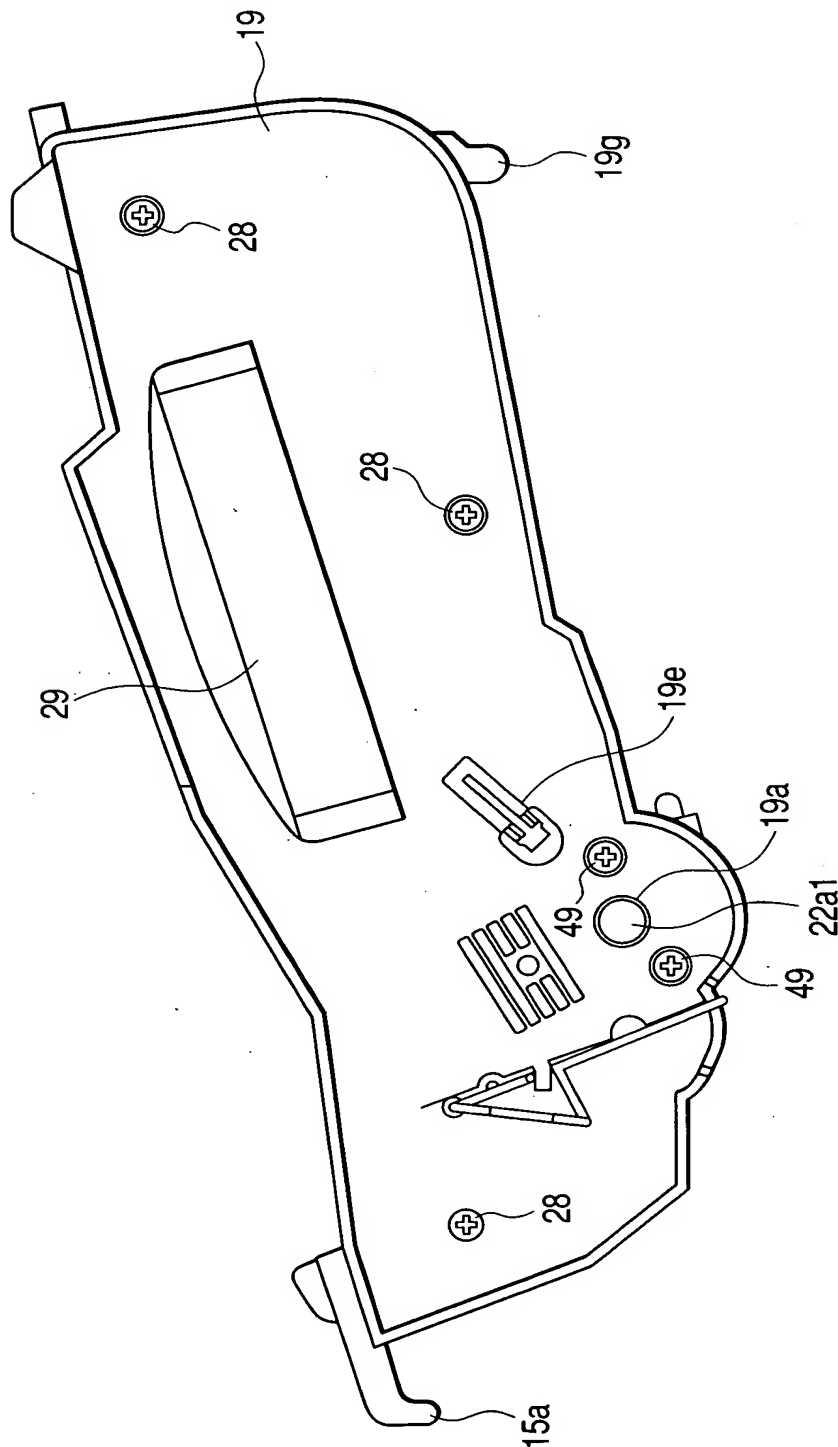




FIG. 4

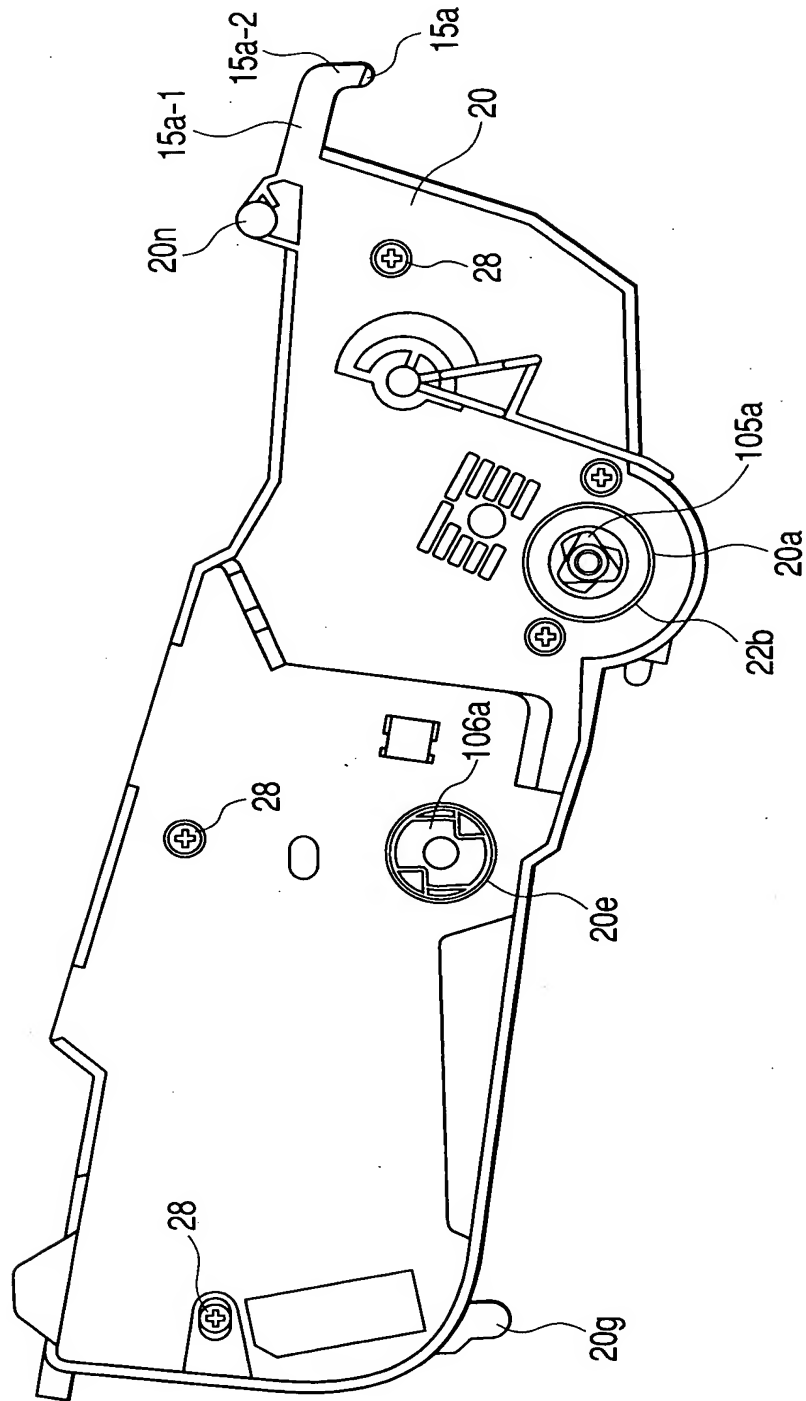




FIG. 5

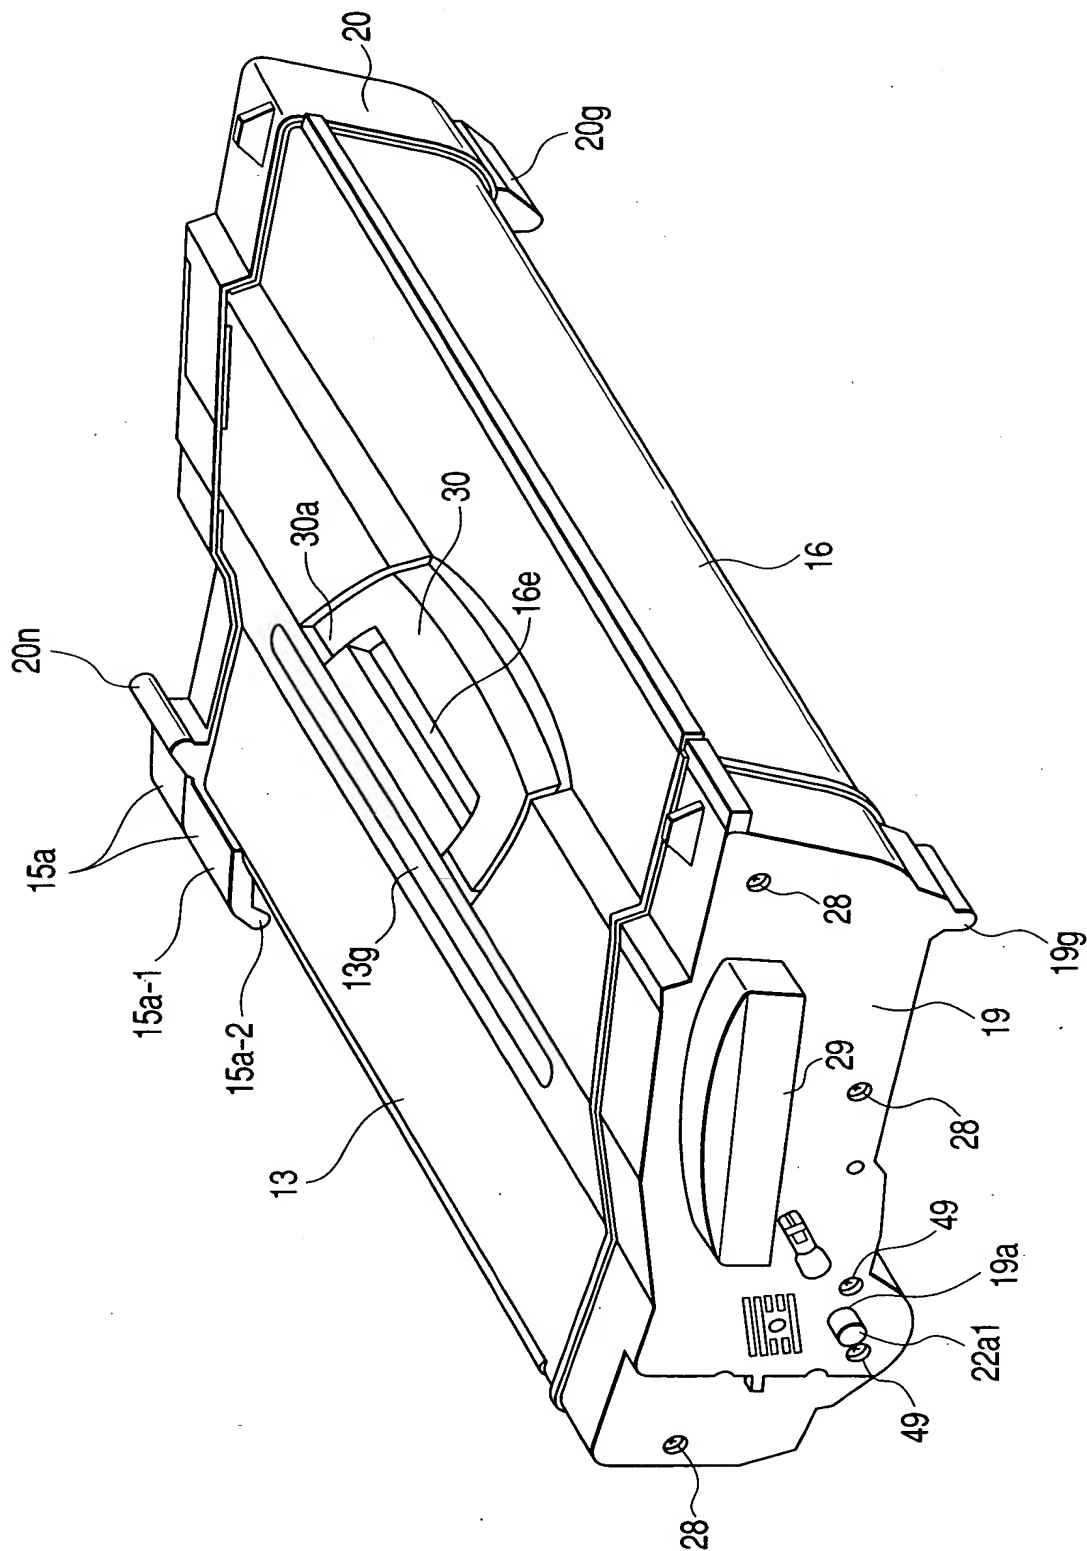




FIG. 6A

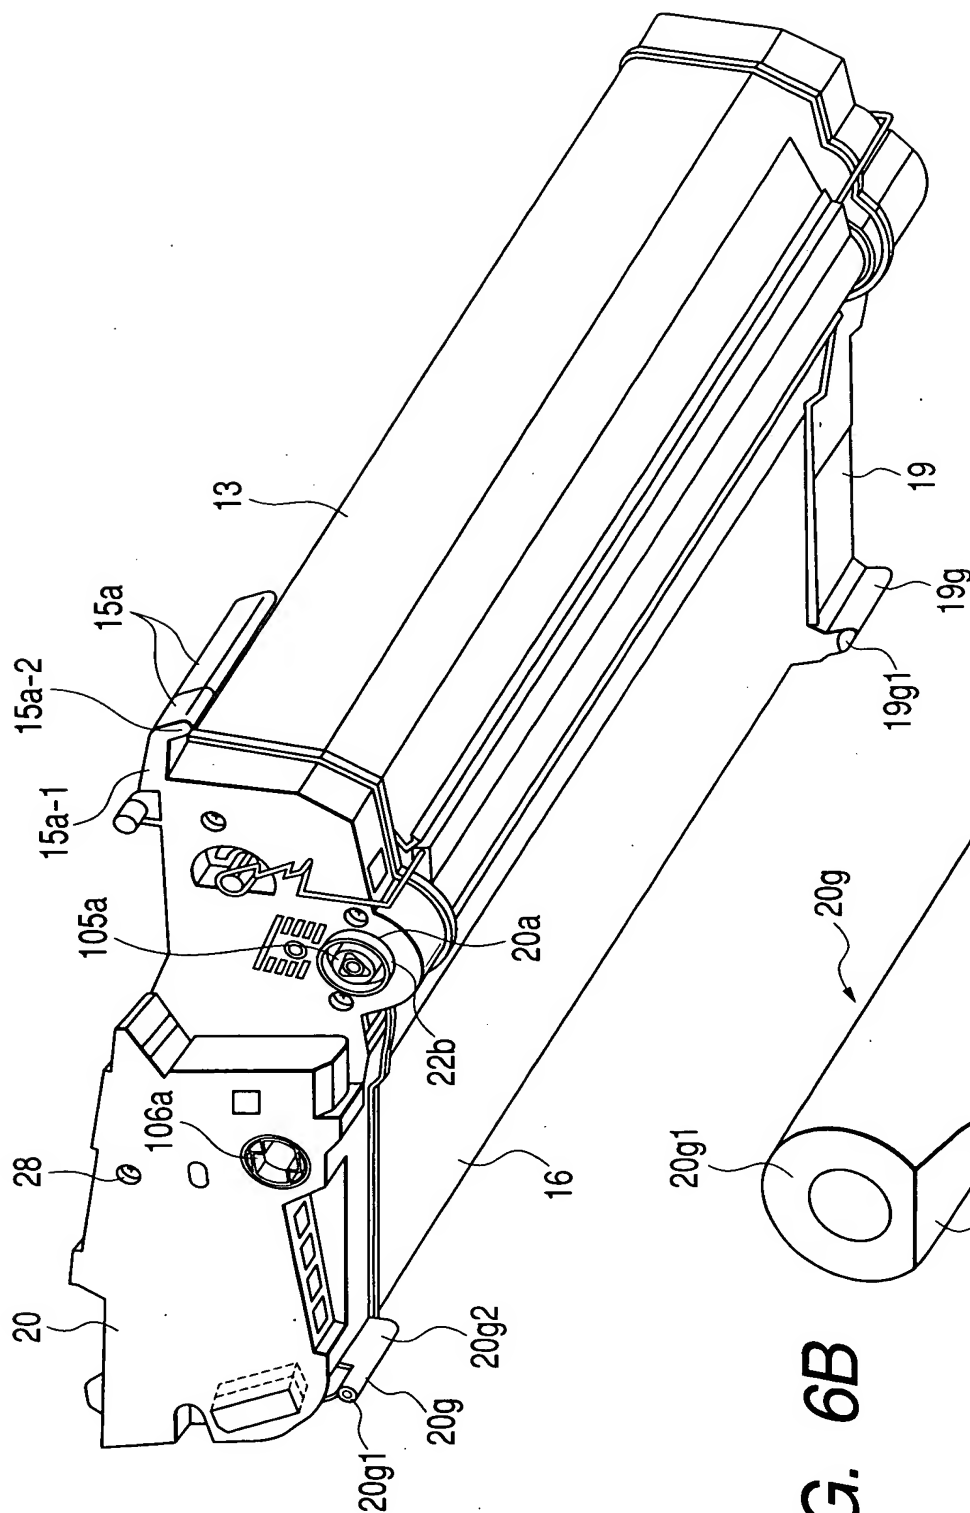
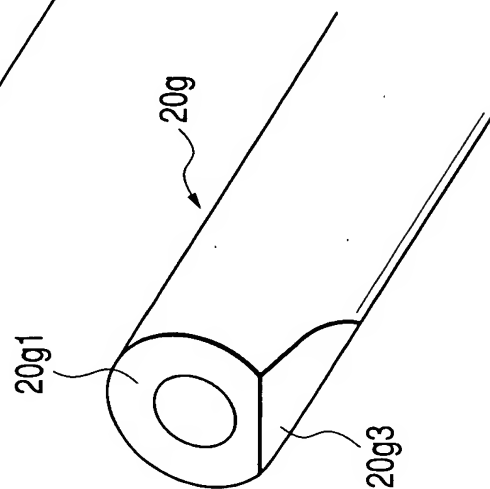


FIG. 6B



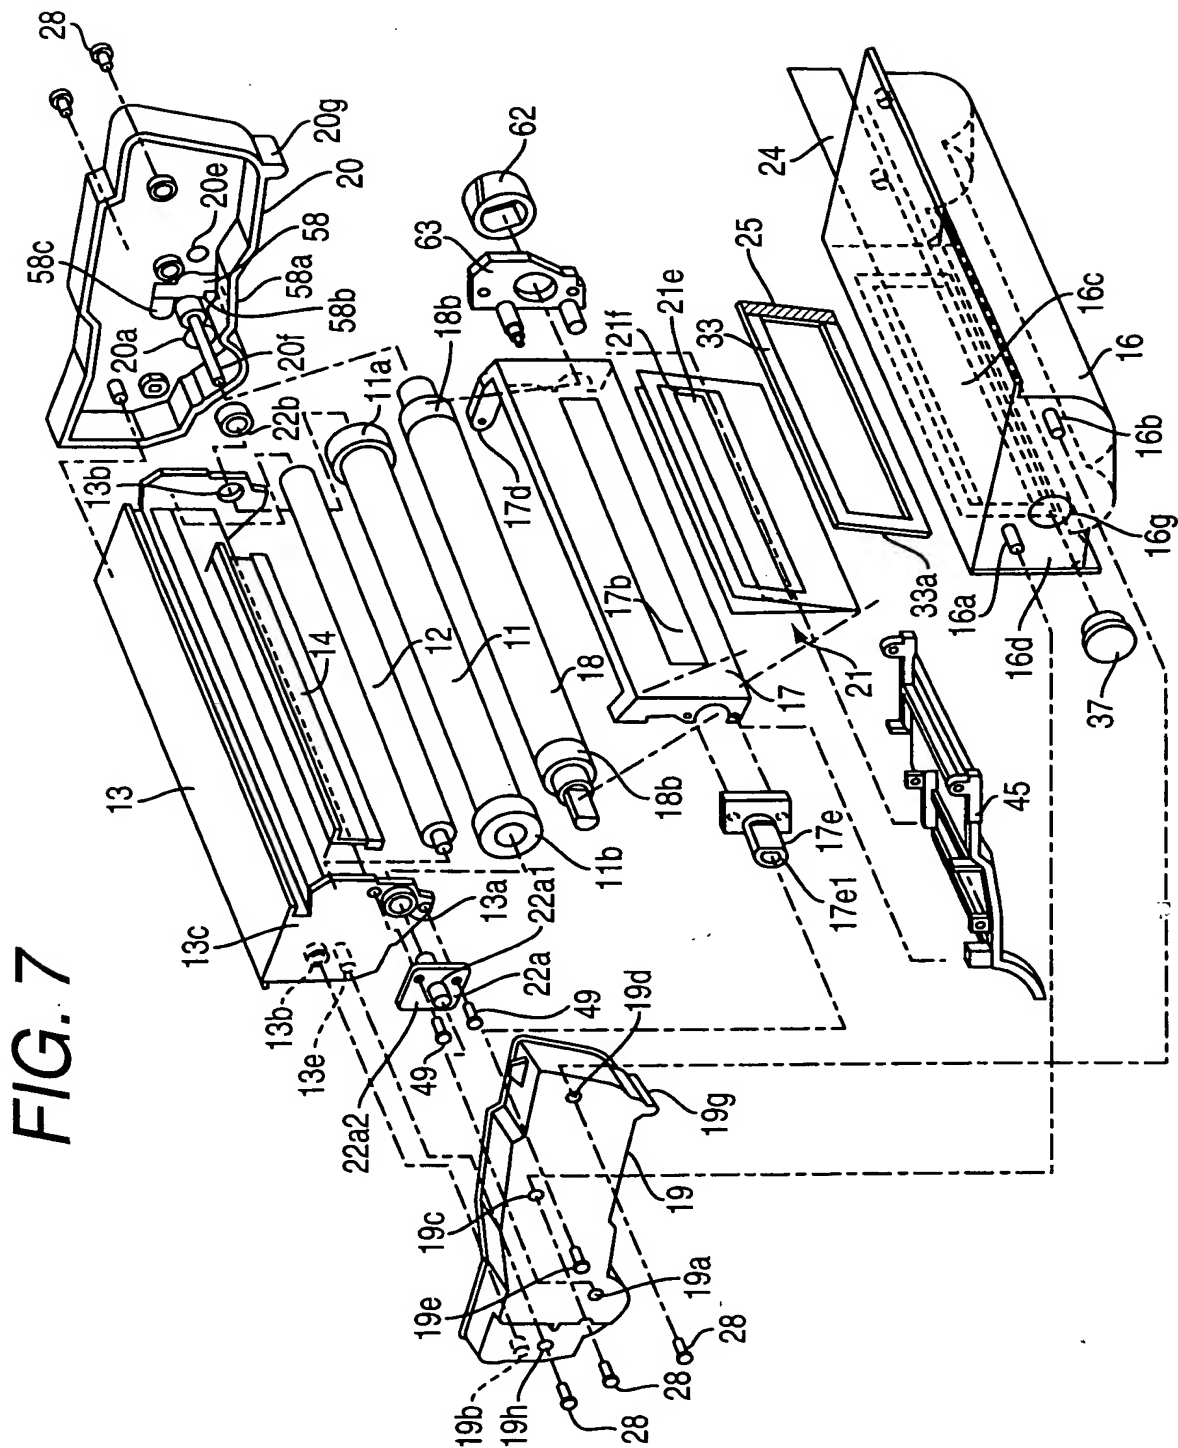



FIG. 7

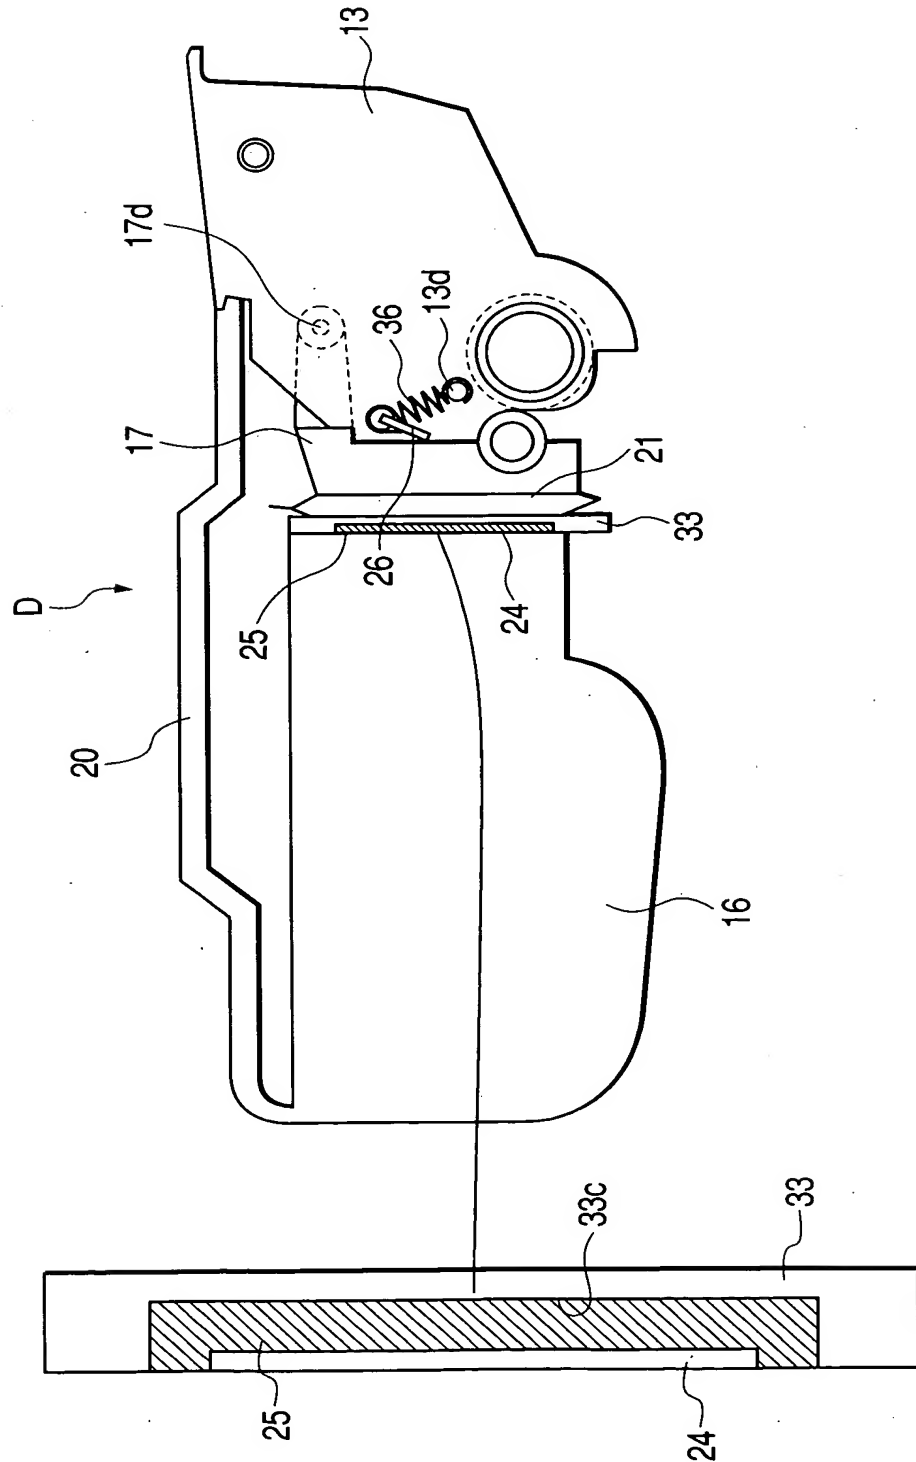




FIG. 9

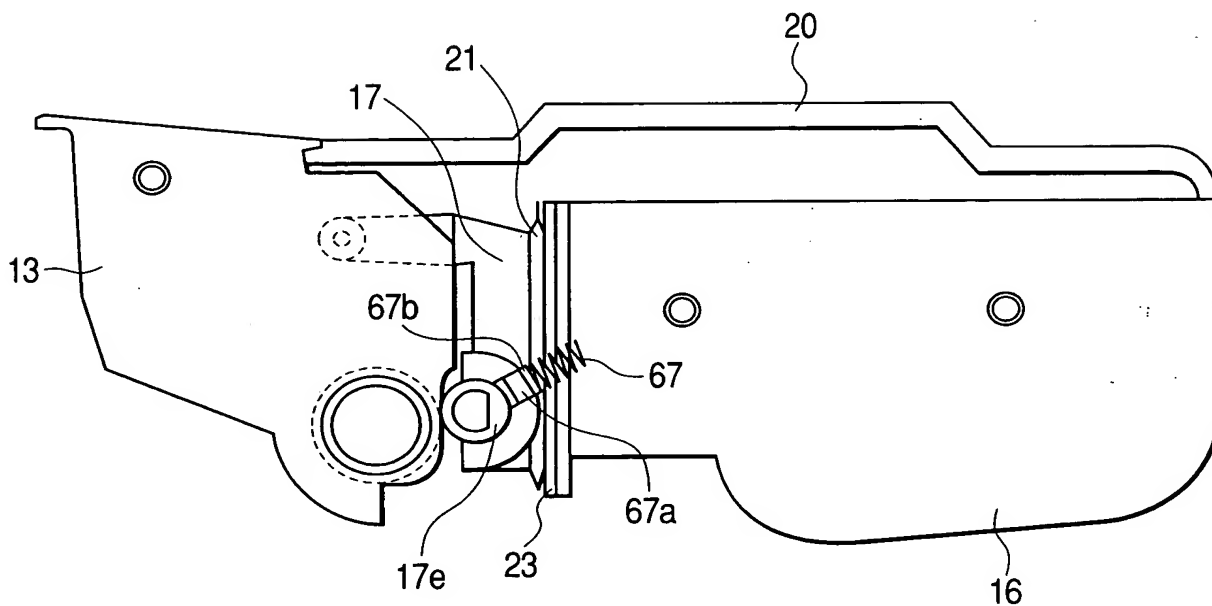


FIG. 10

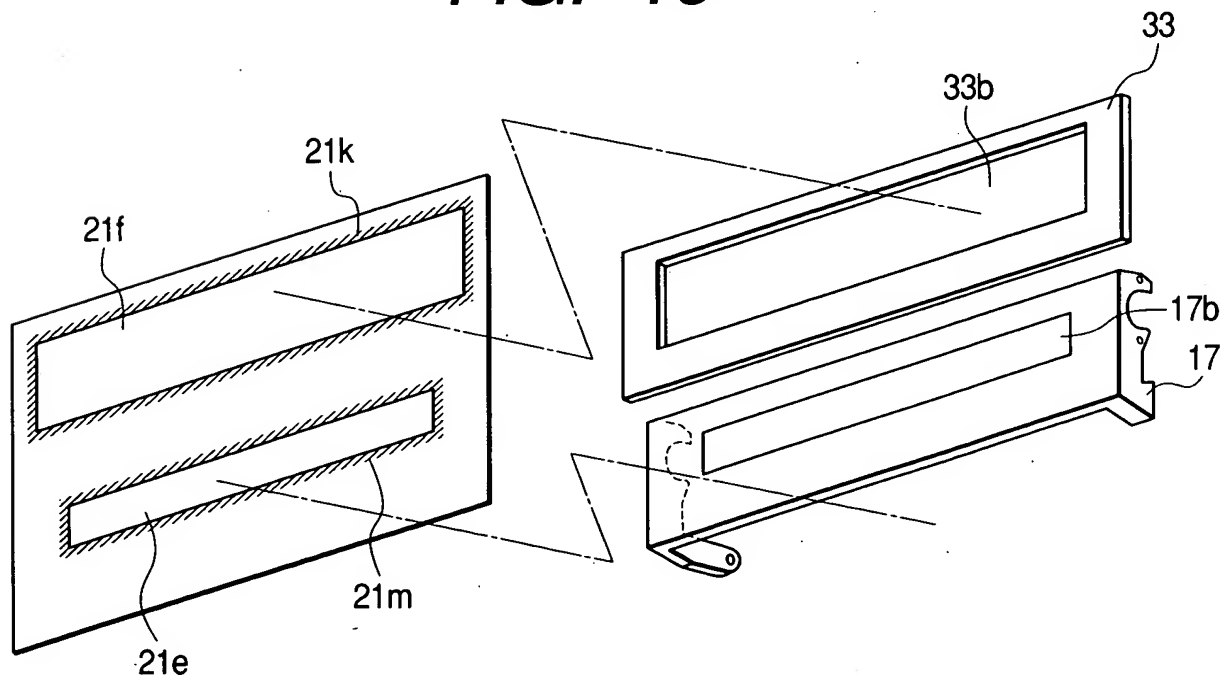




FIG. 11

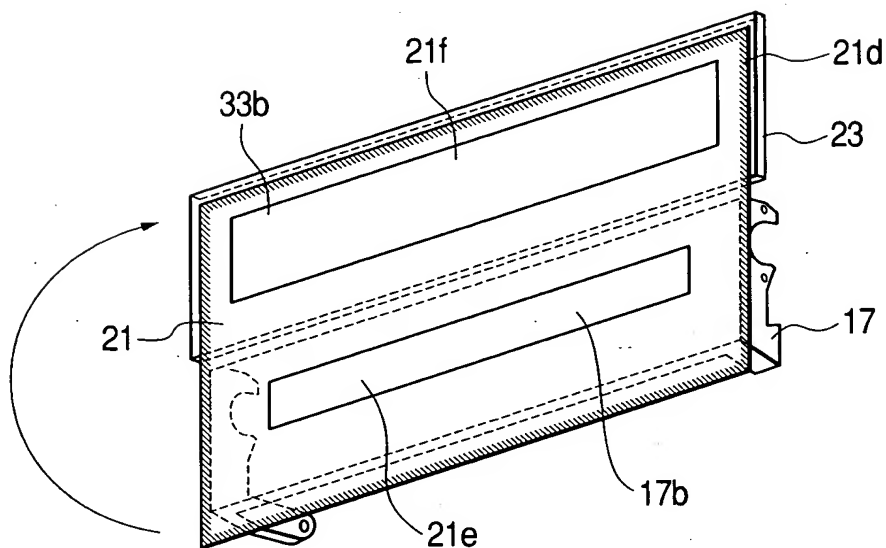


FIG. 12

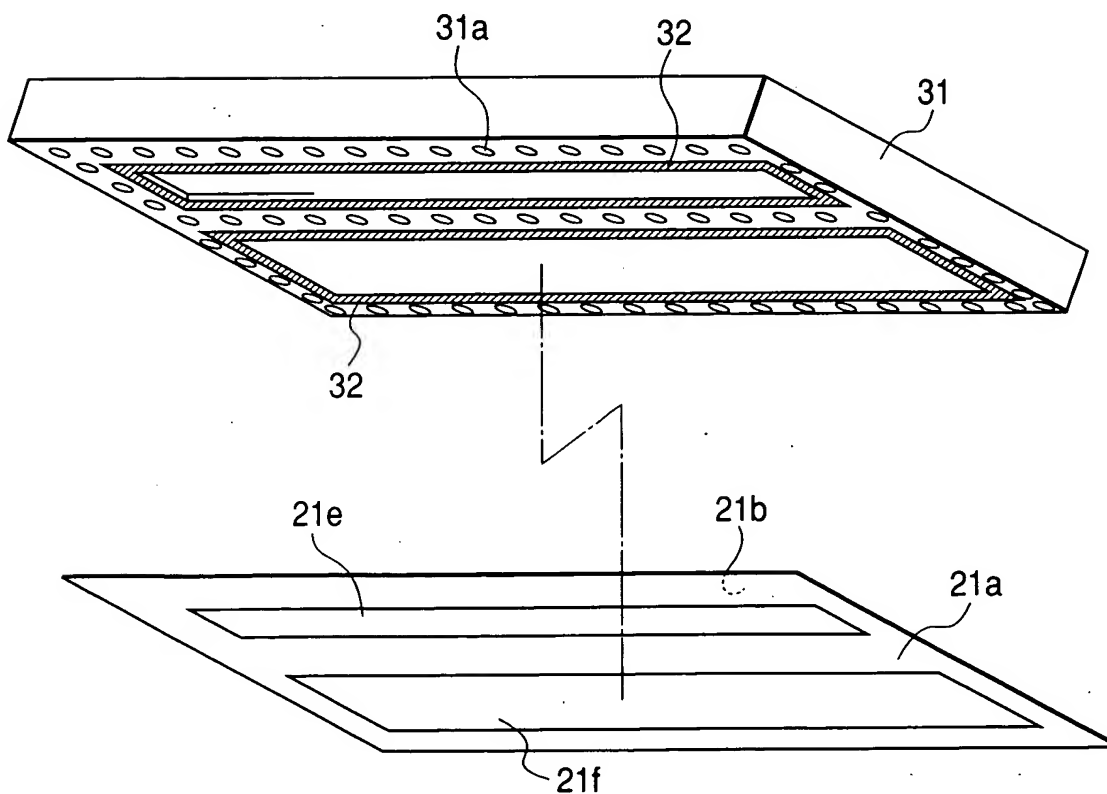




FIG. 13

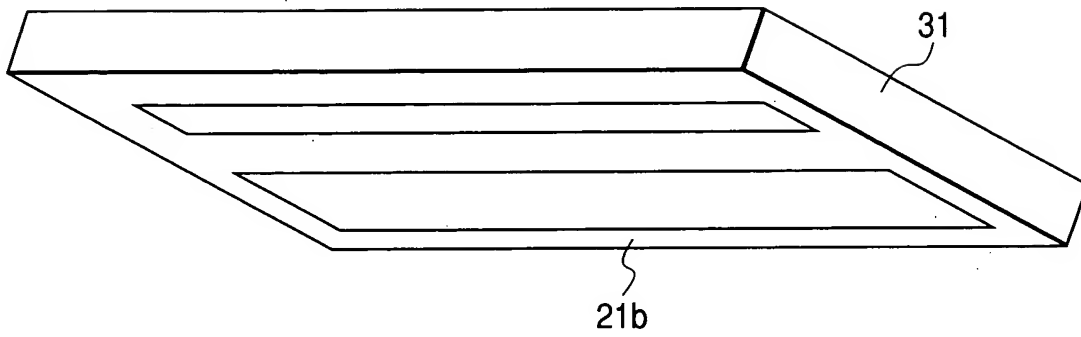


FIG. 14

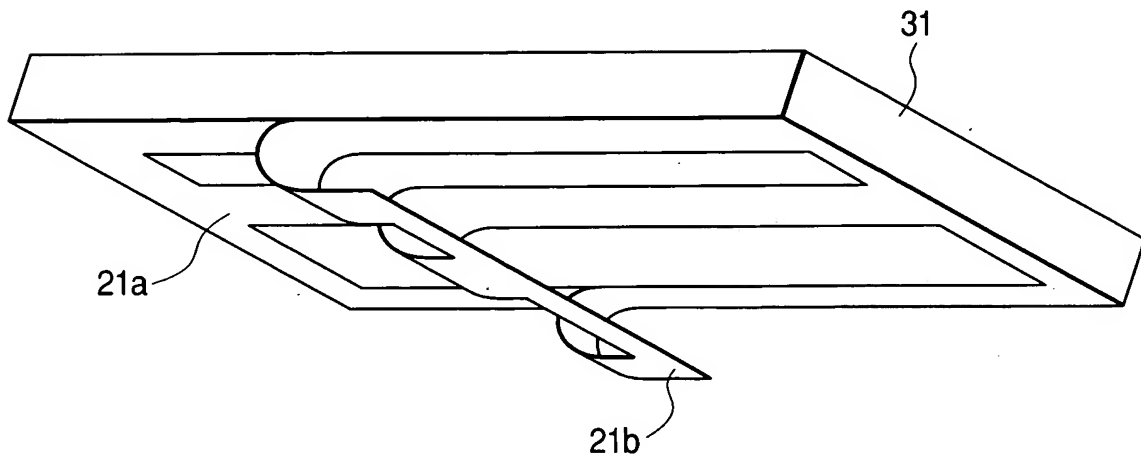




FIG. 15

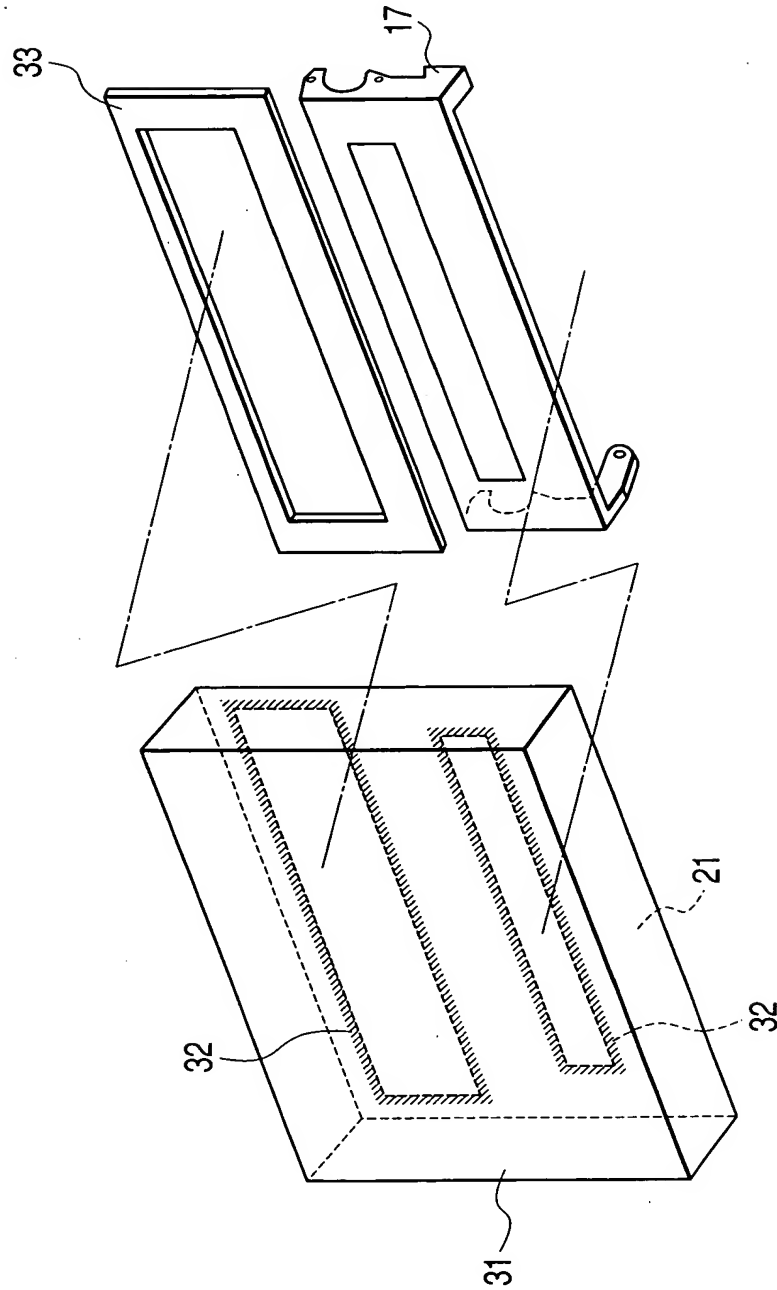
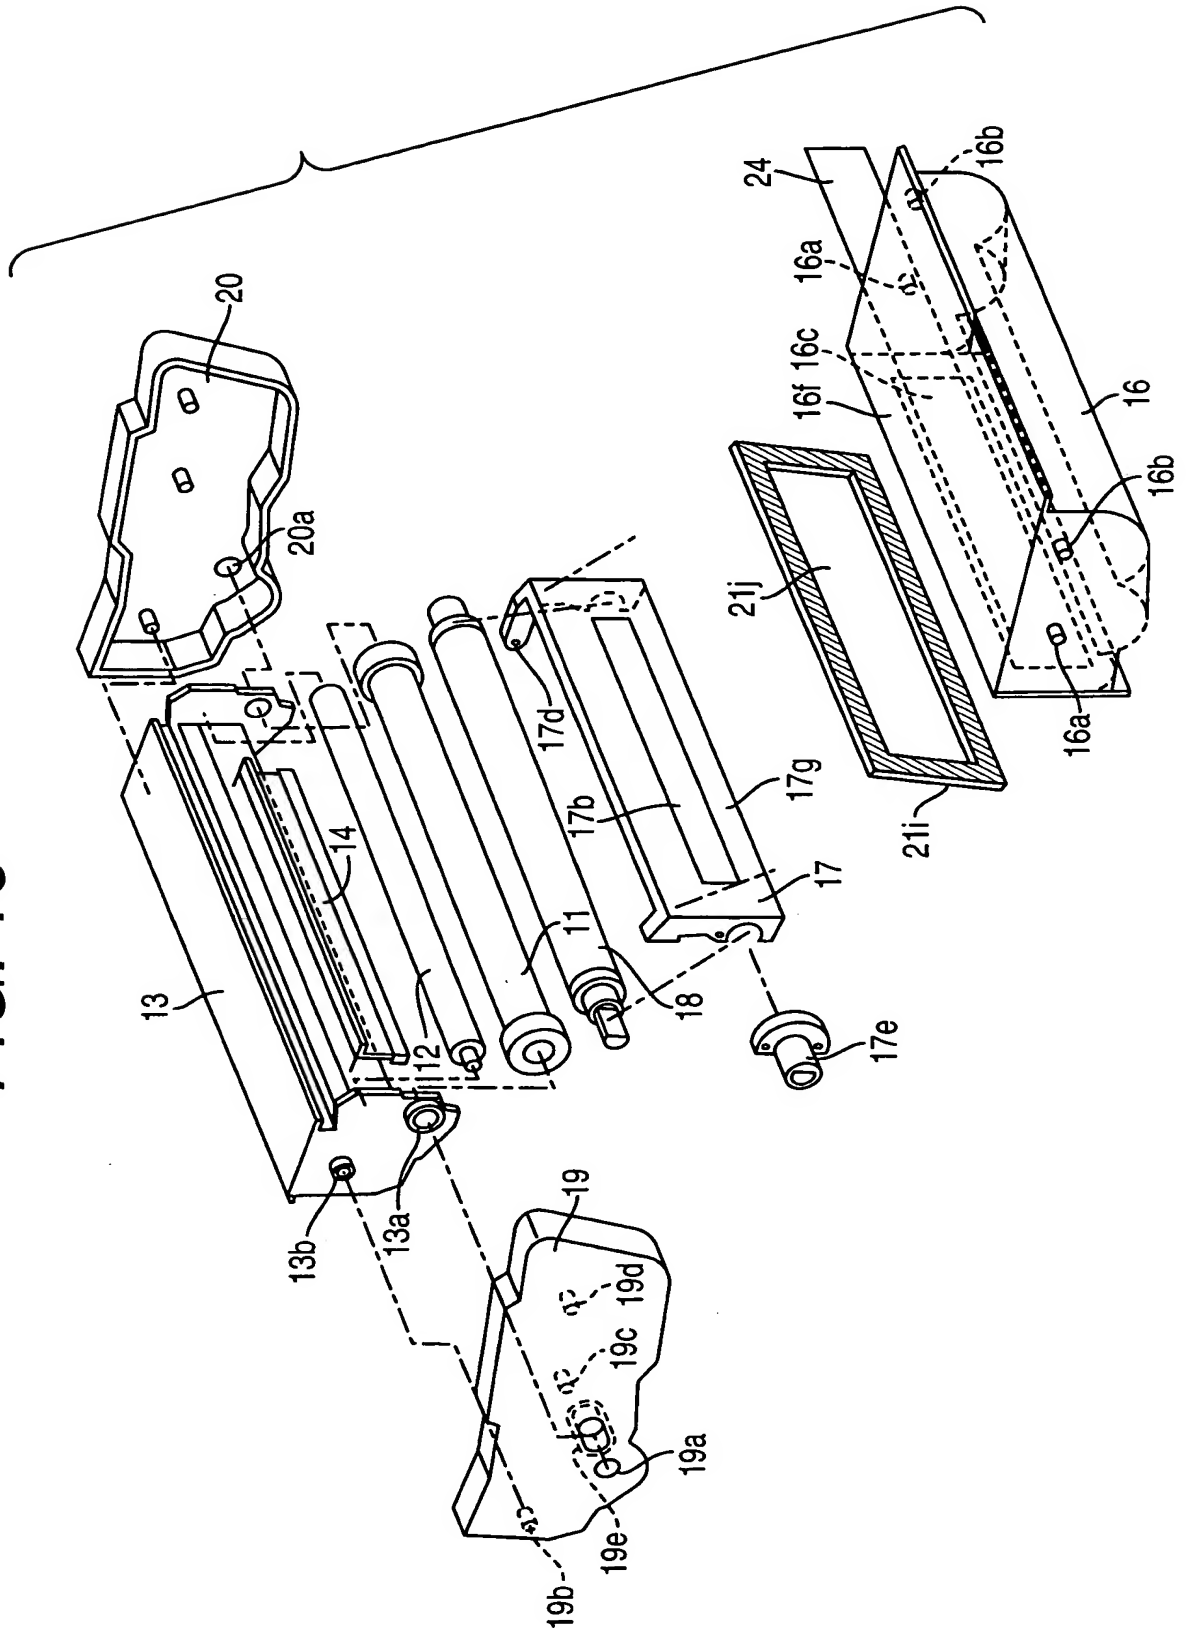




FIG. 16



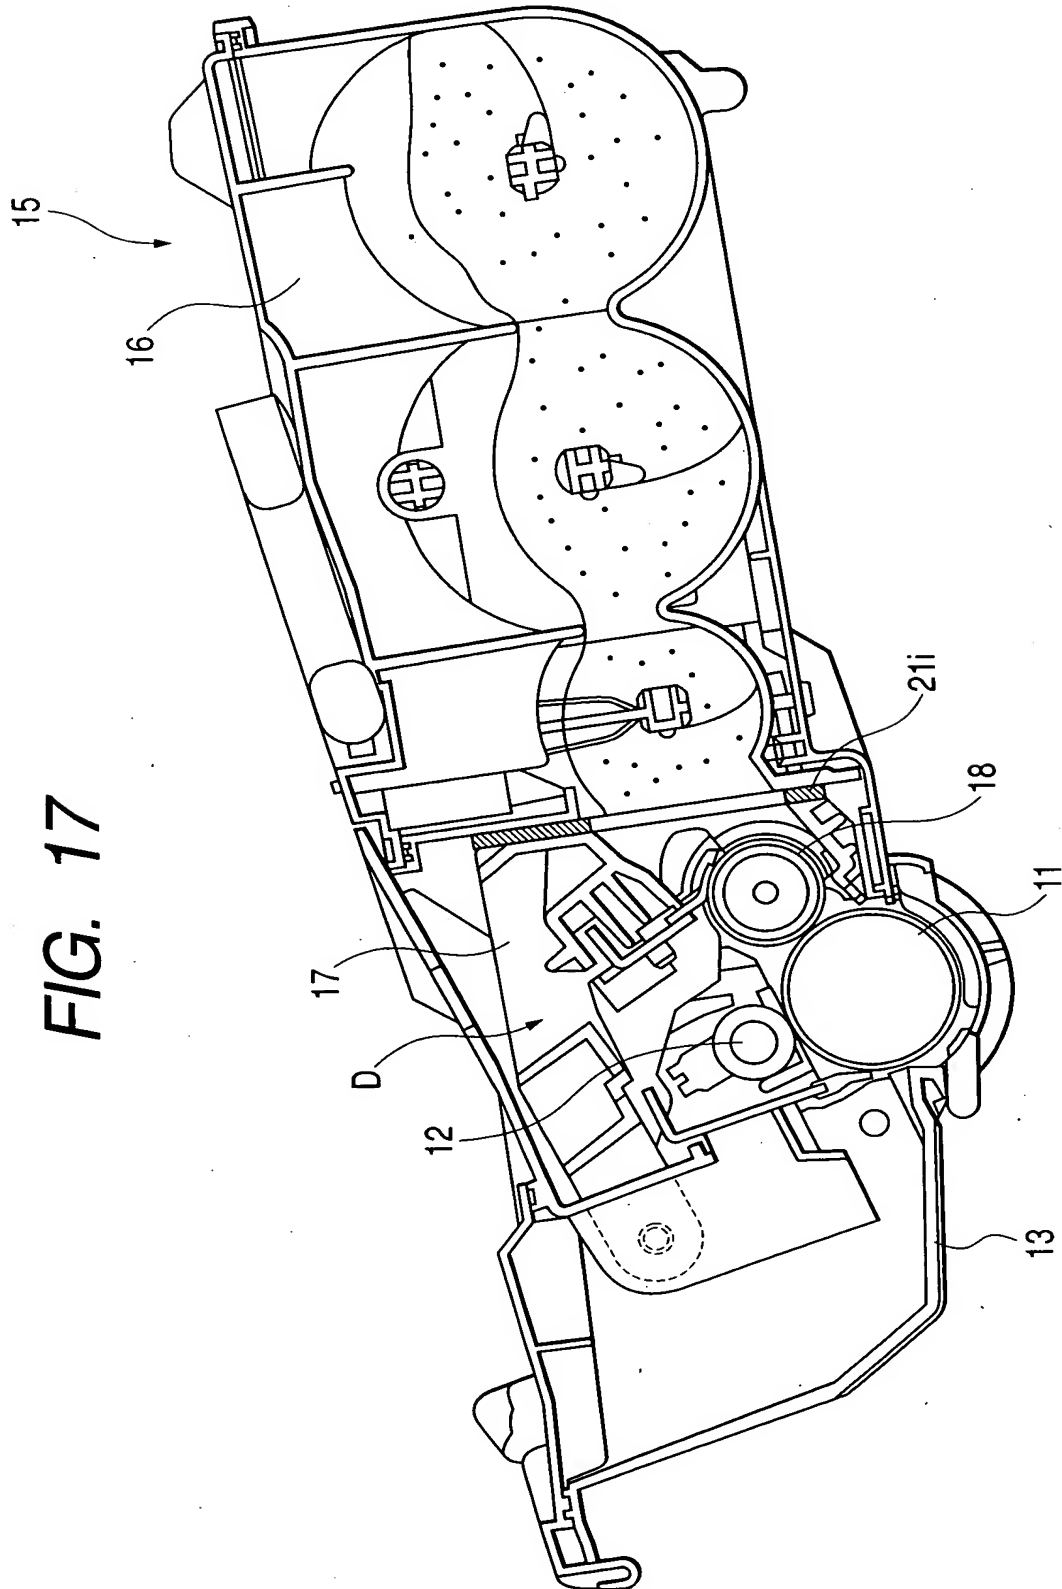




FIG. 18

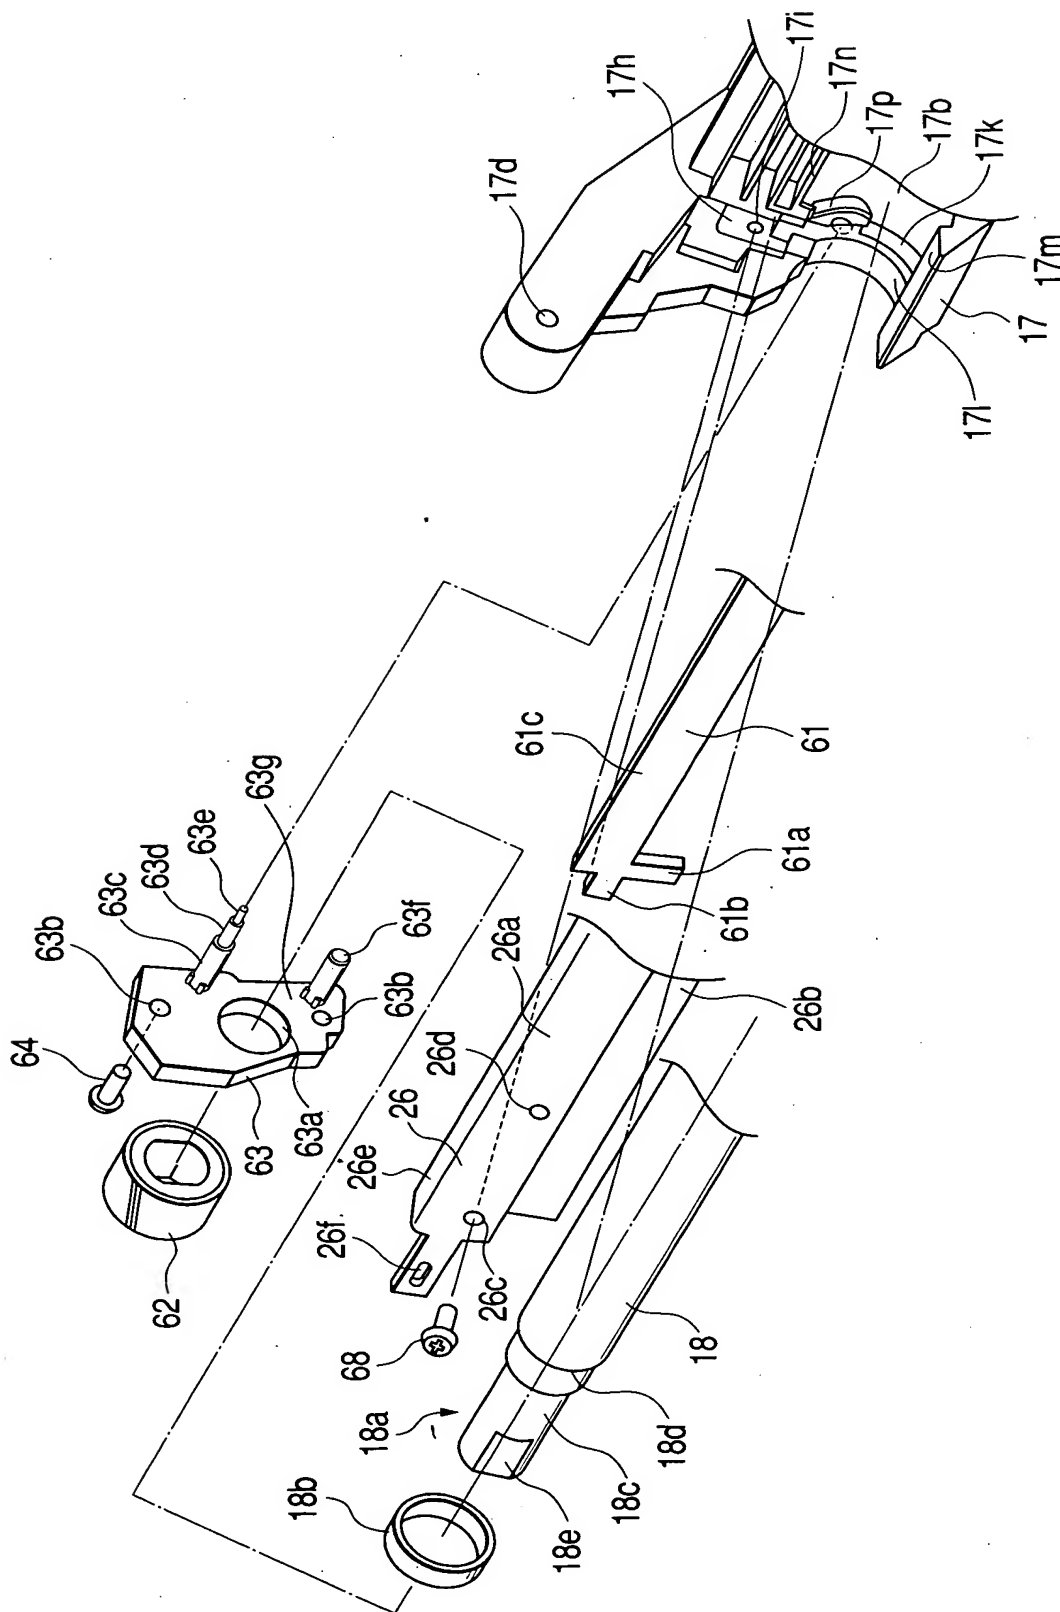
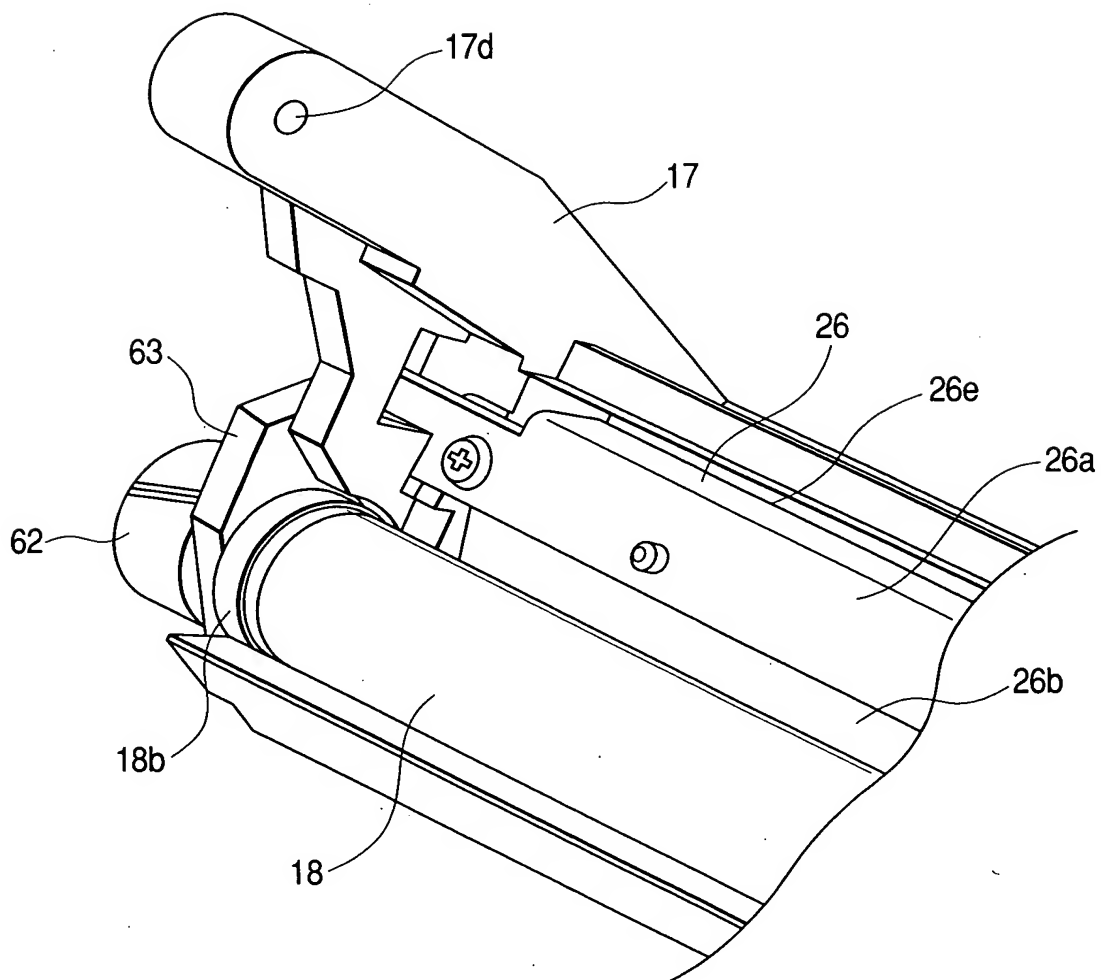




FIG. 19



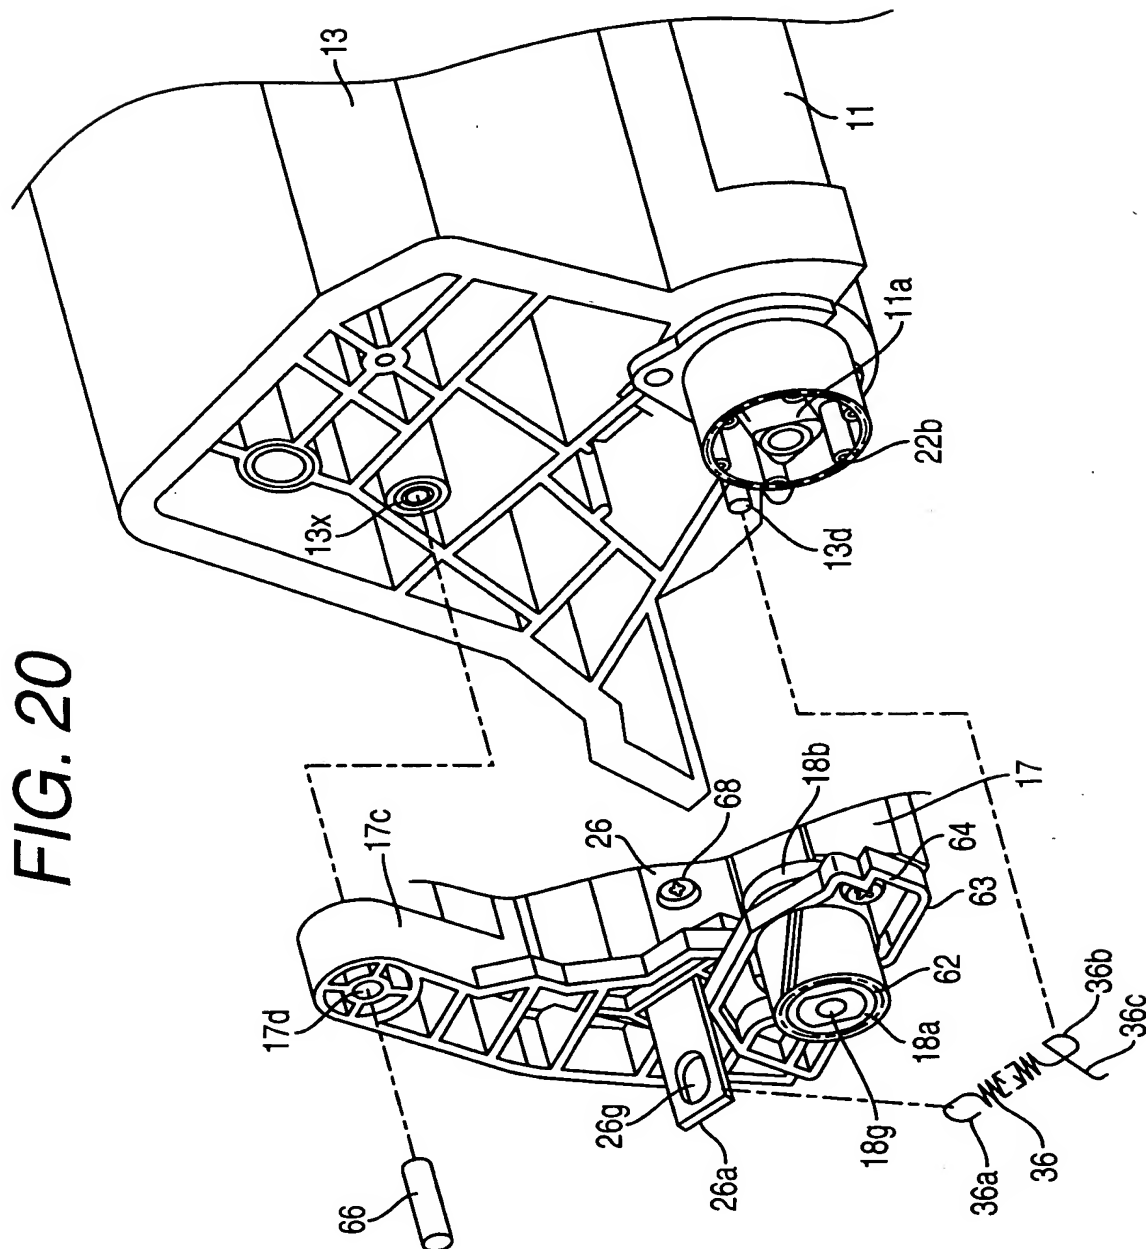


FIG. 21

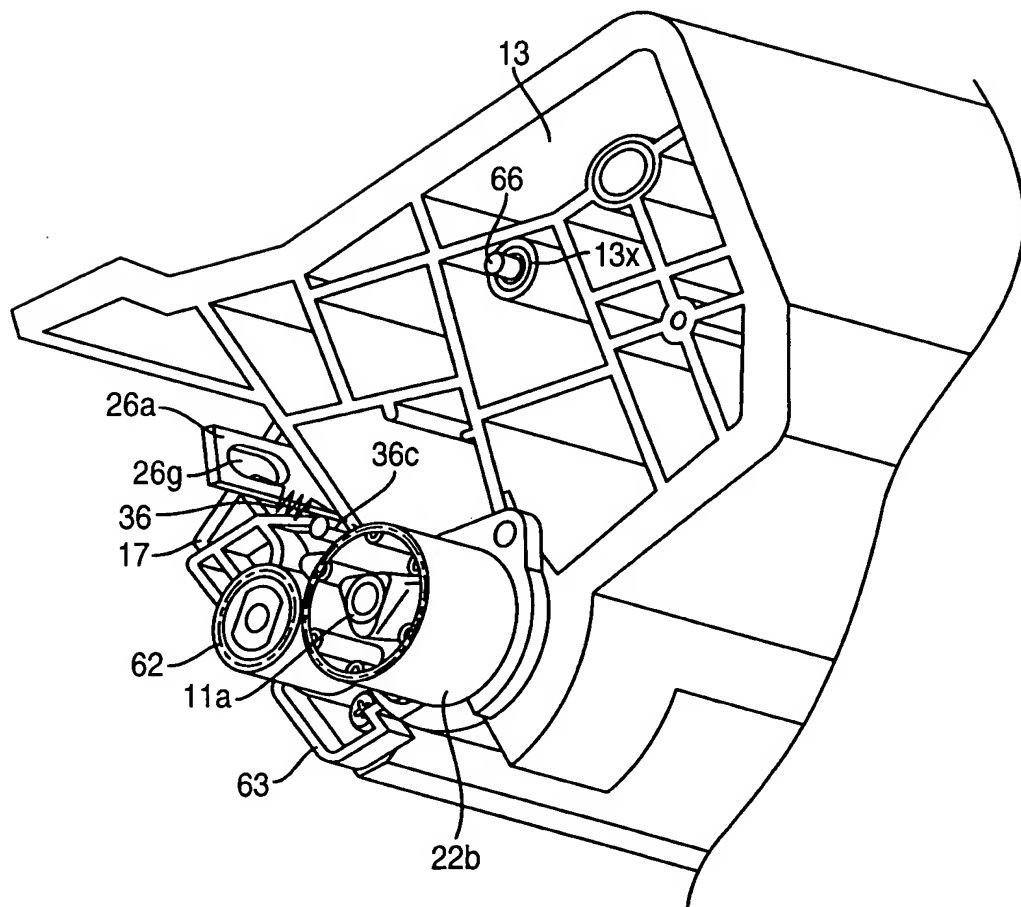


FIG. 22

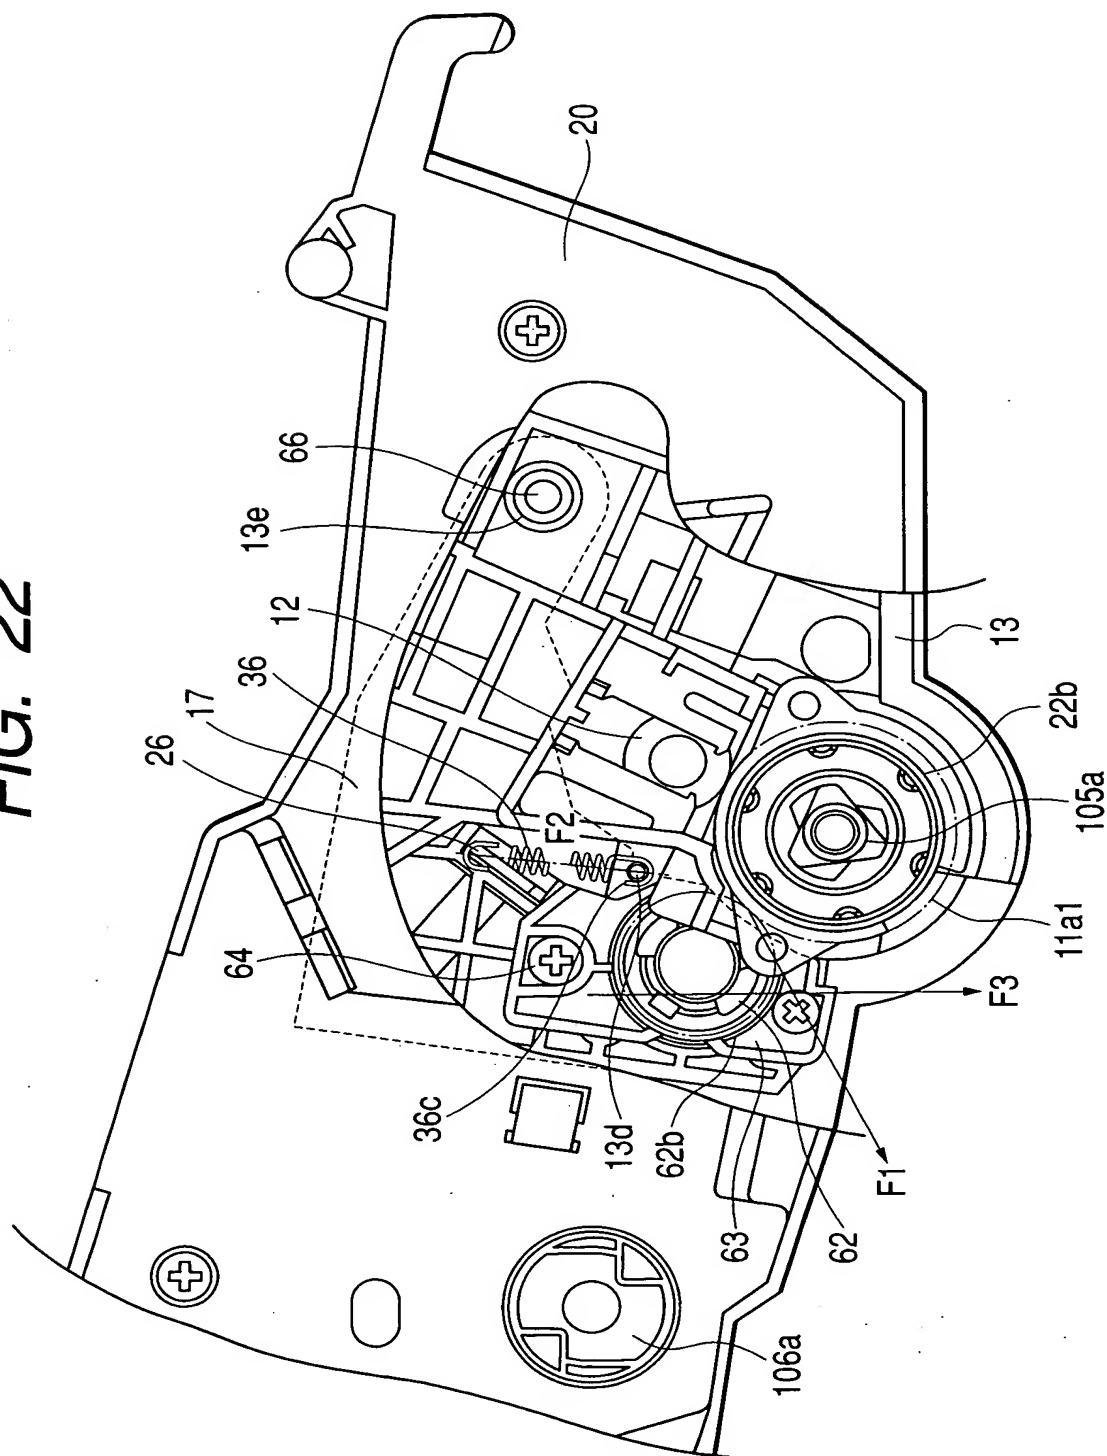




FIG. 23

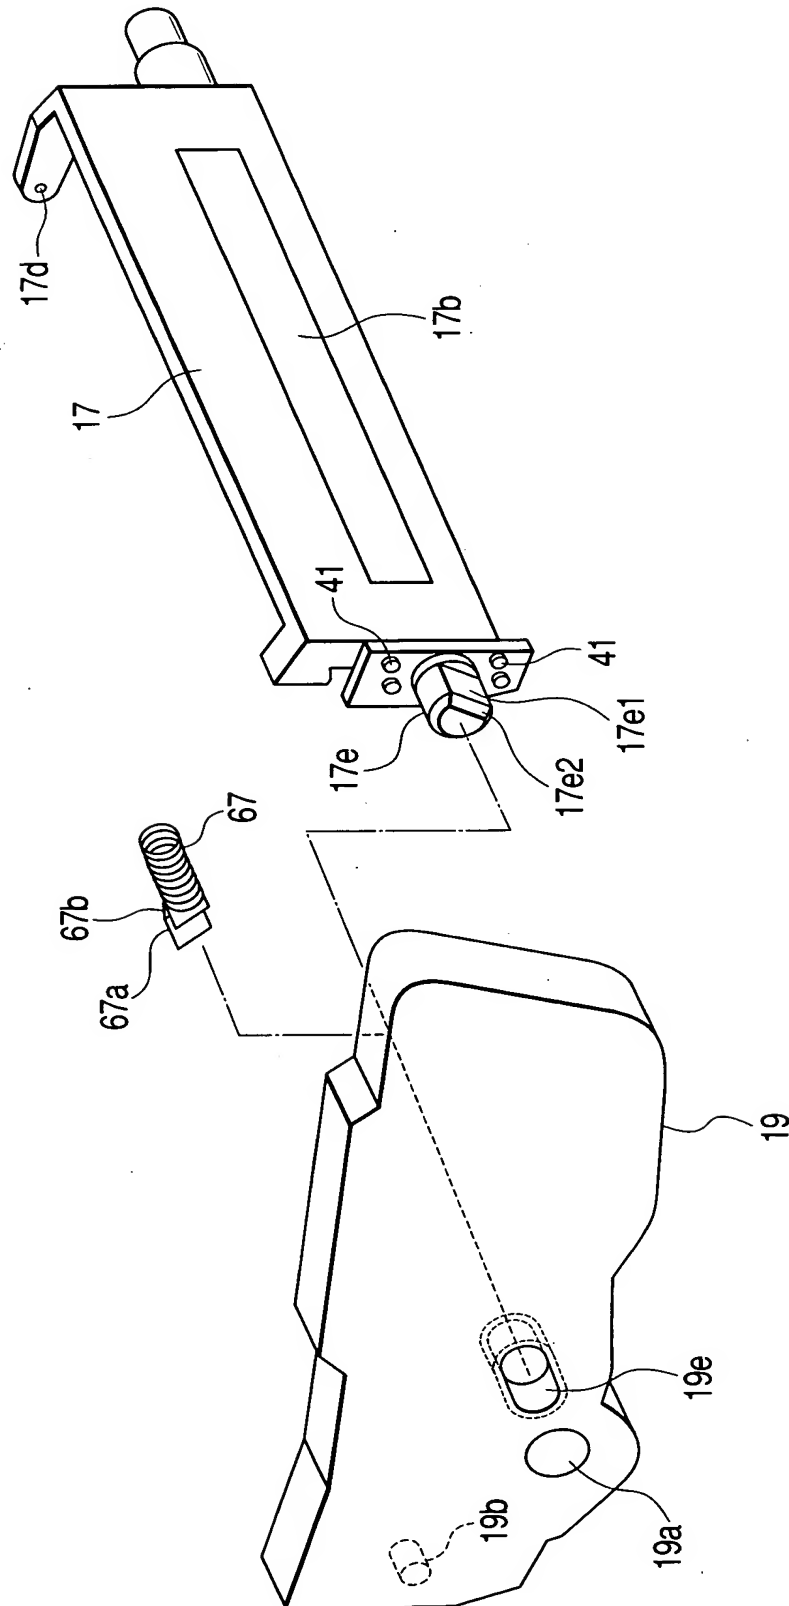




FIG. 24

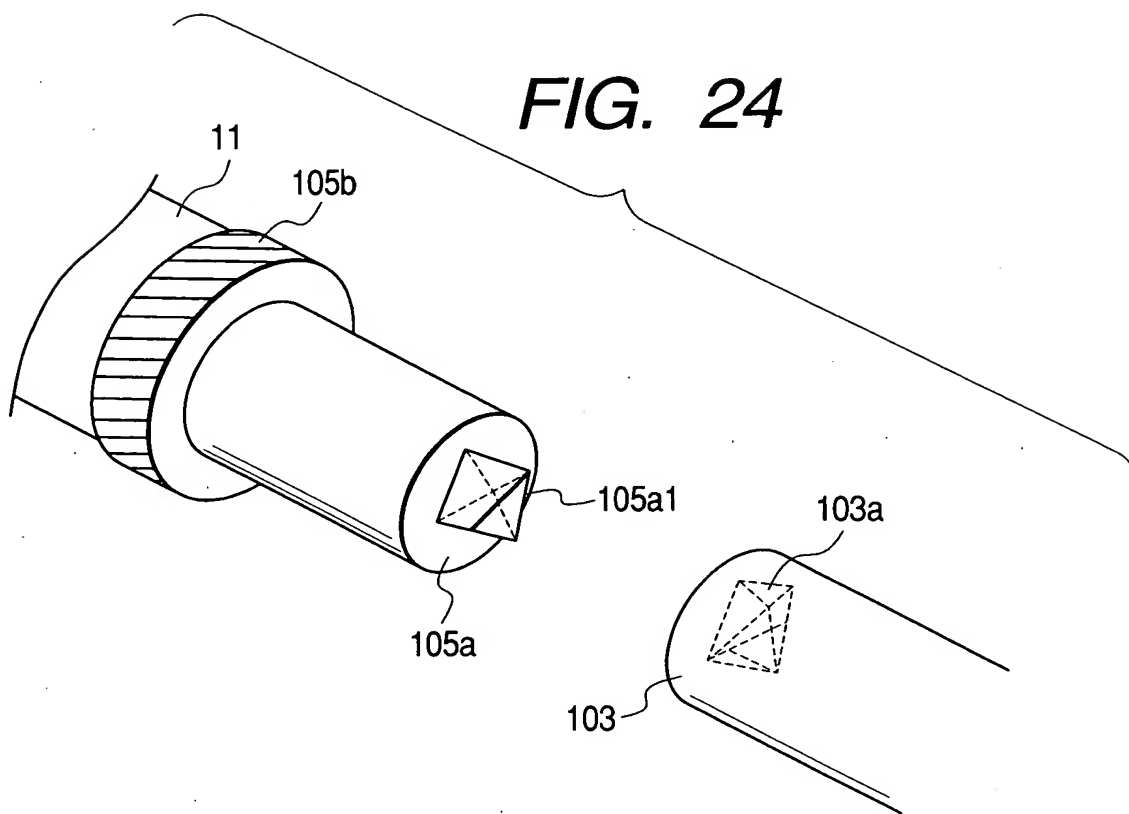




FIG. 25

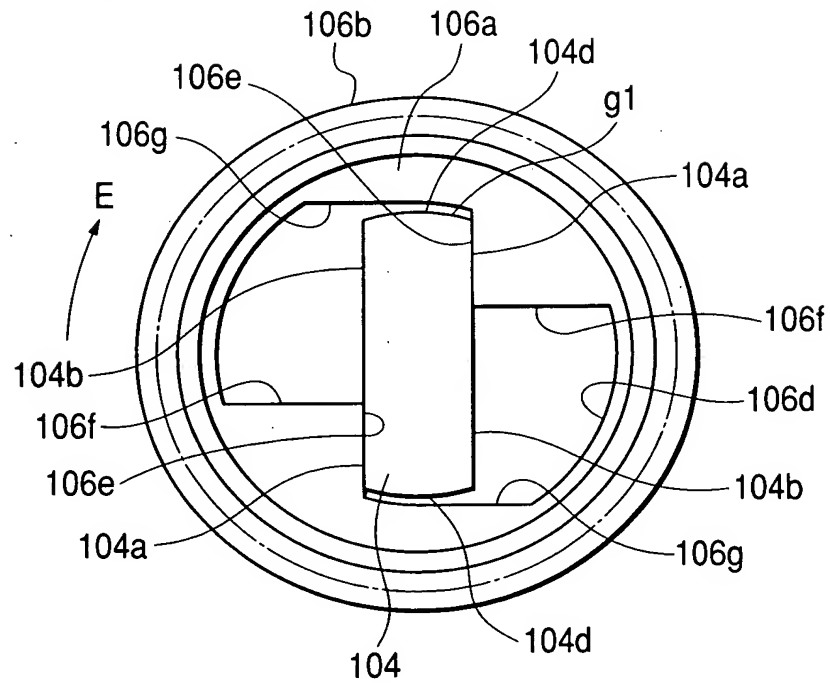


FIG. 26

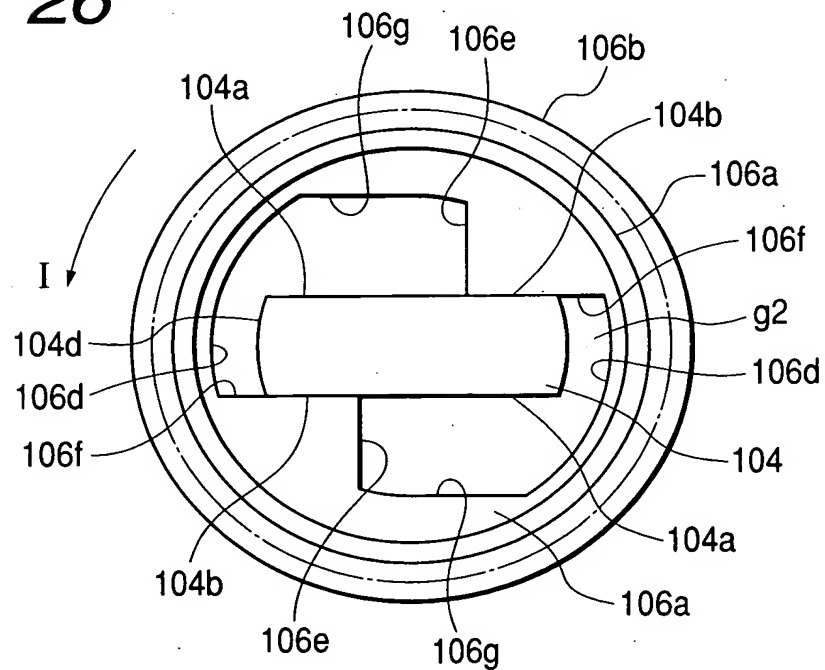




FIG. 27

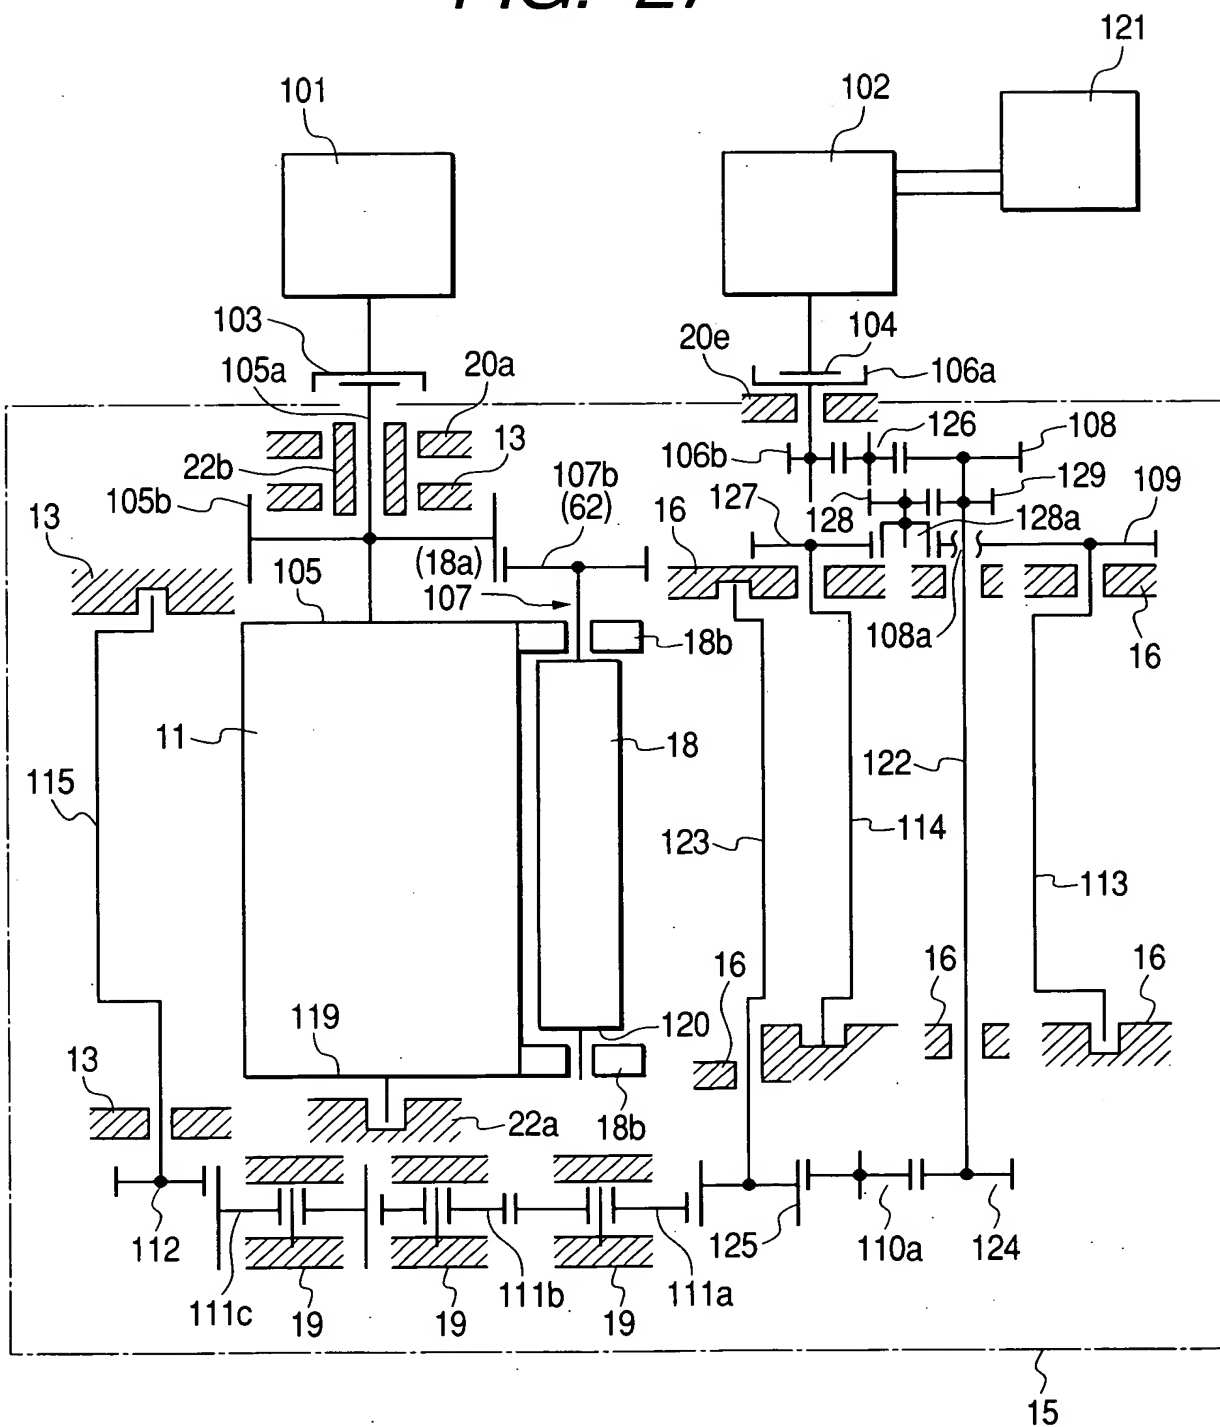




FIG. 28

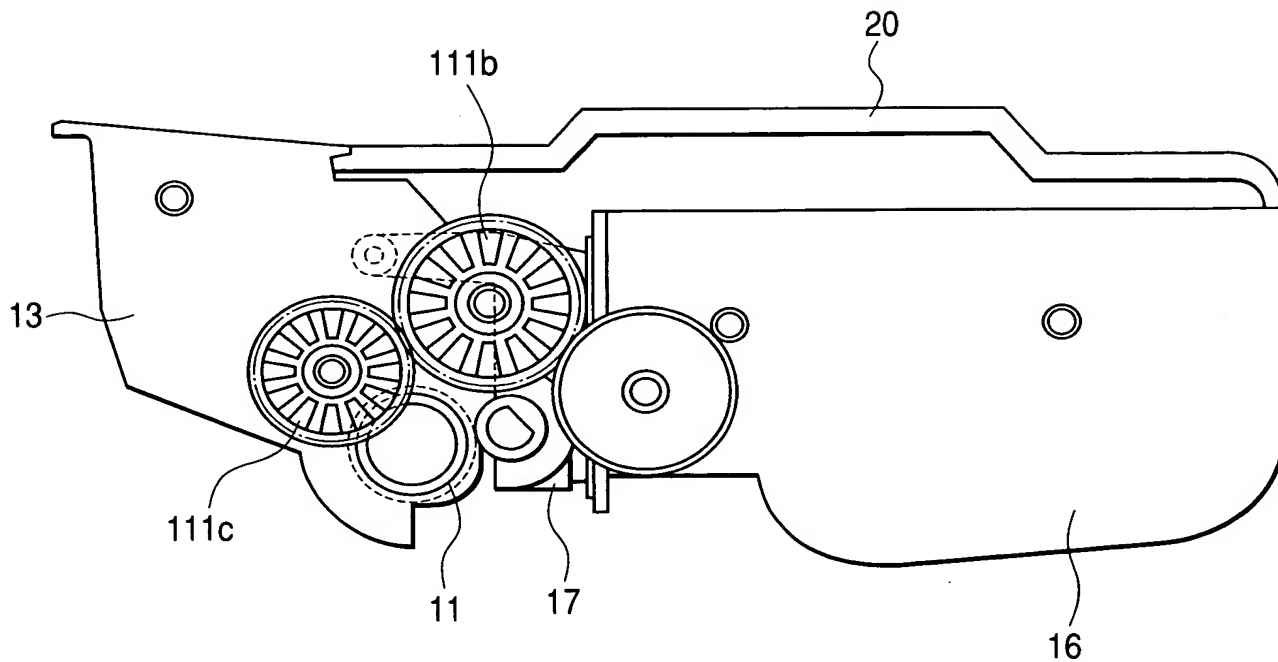
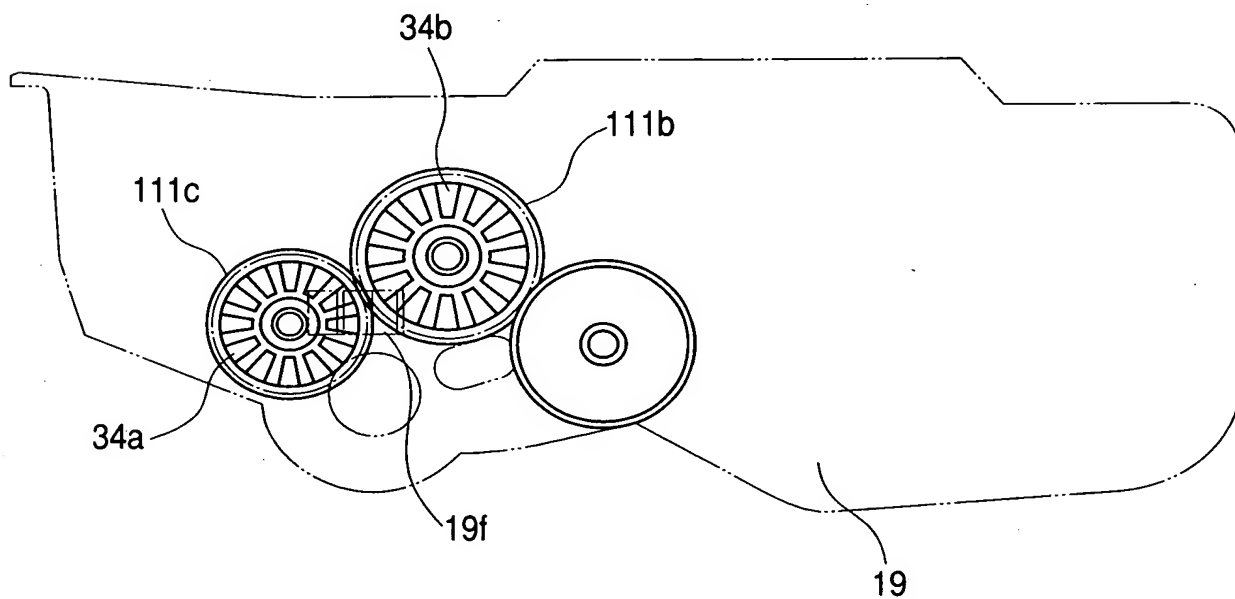


FIG. 29



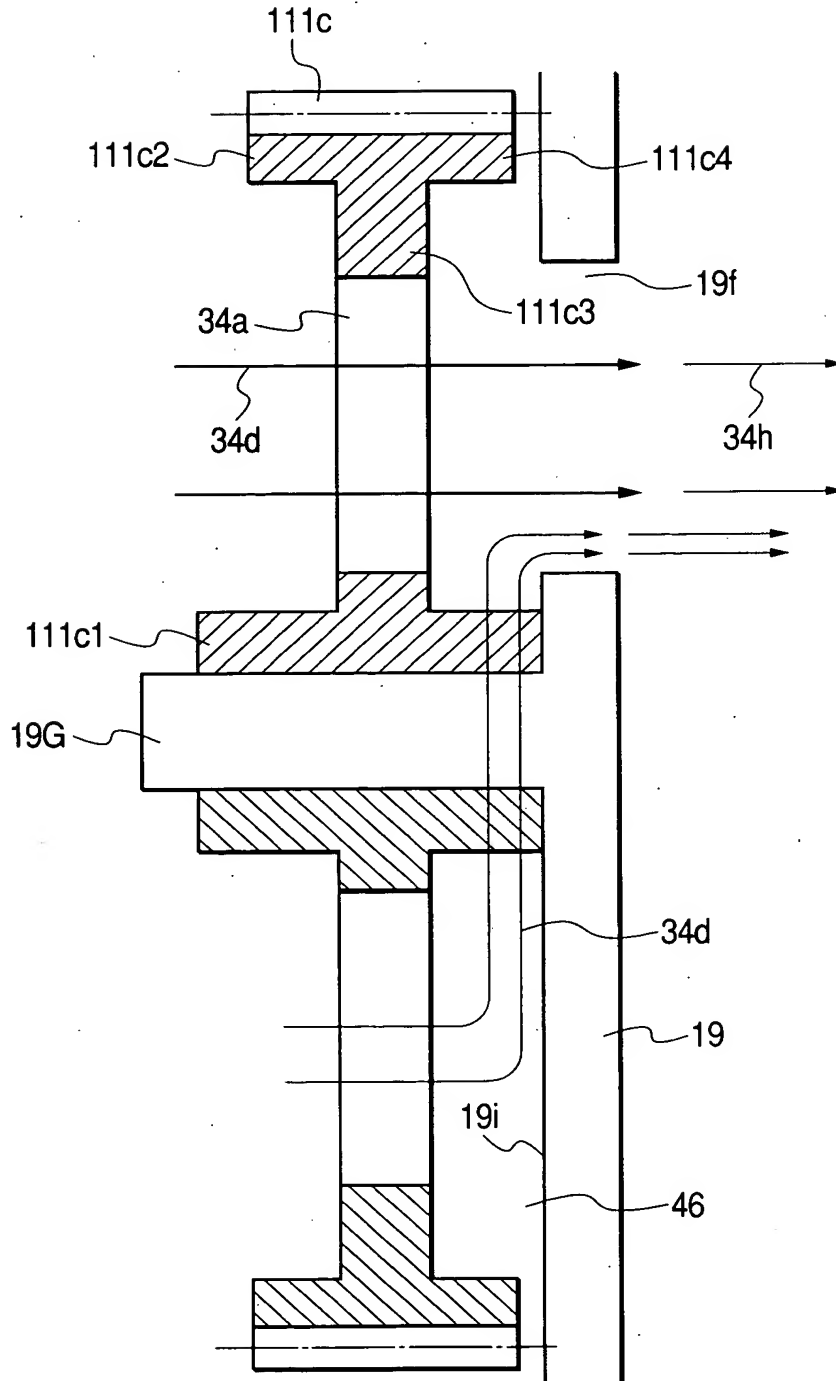




FIG. 31


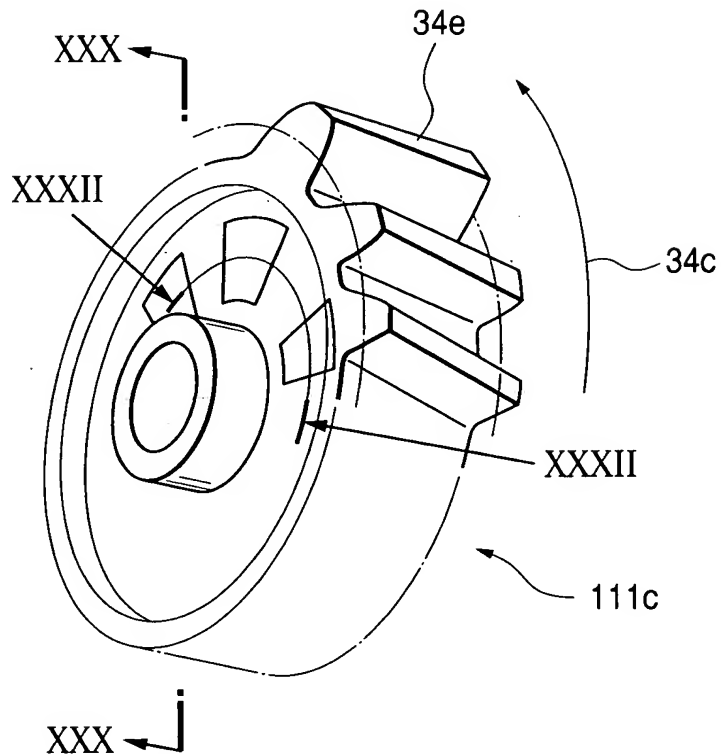



FIG. 32



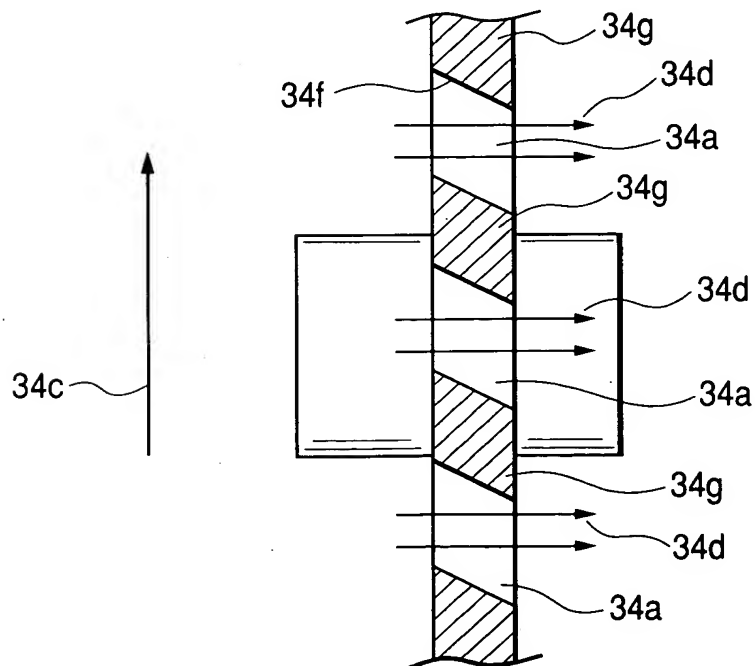

27 / 42

FIG. 33

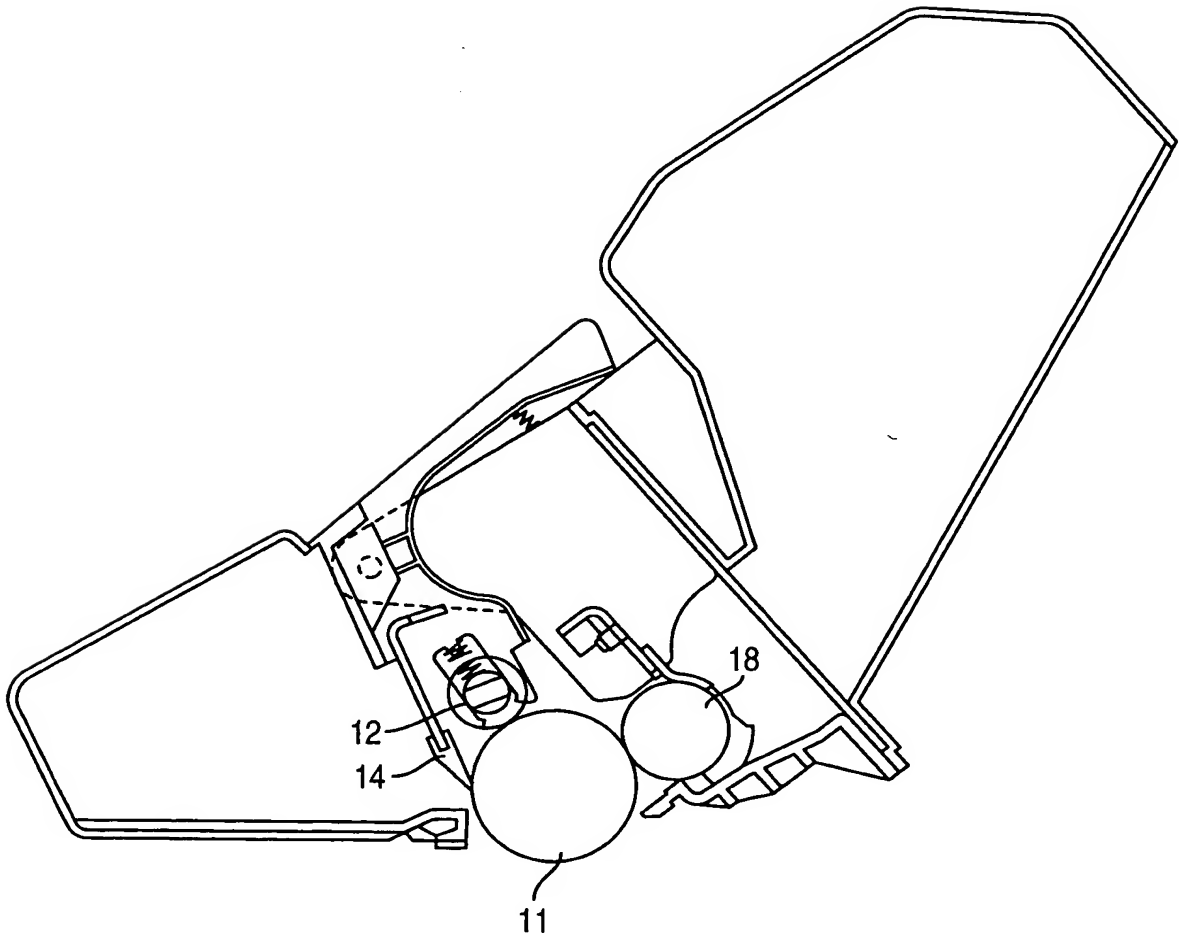


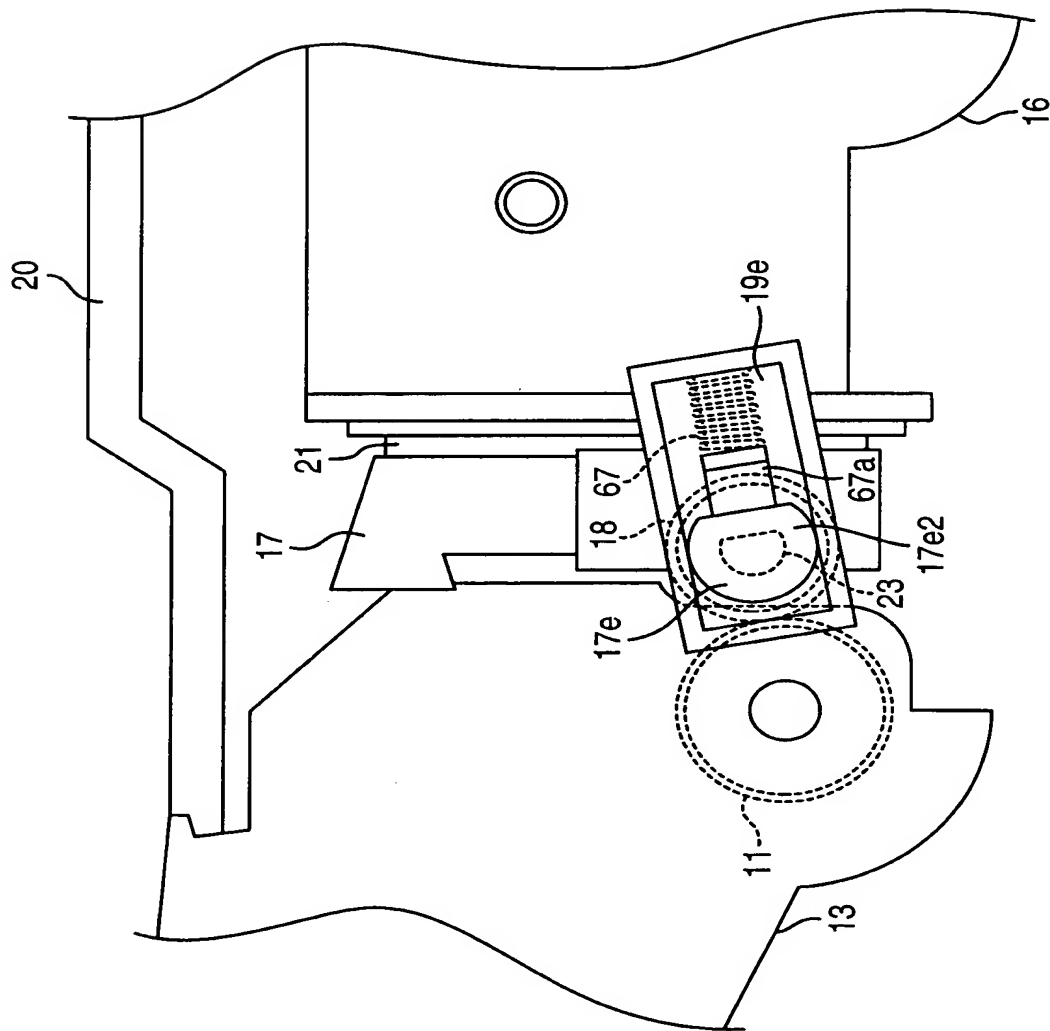


FIG. 34






FIG. 35A

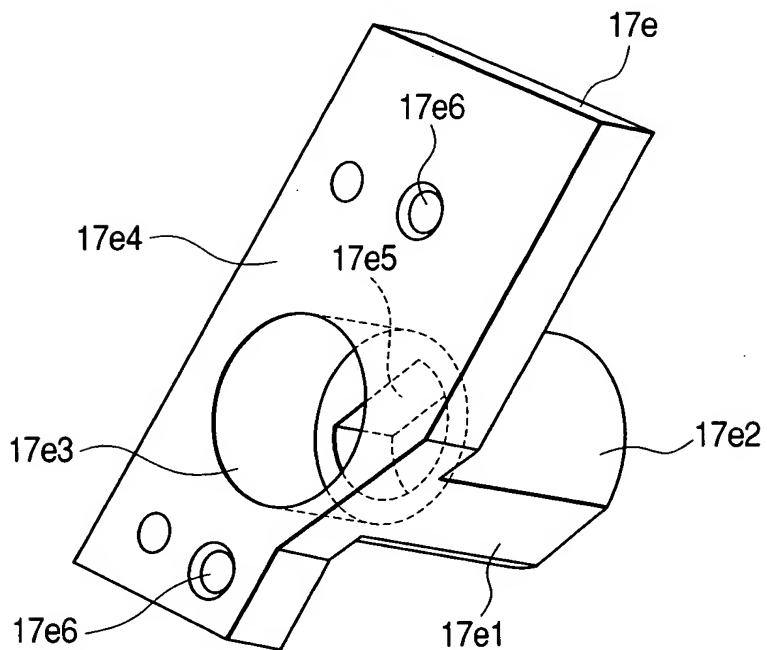
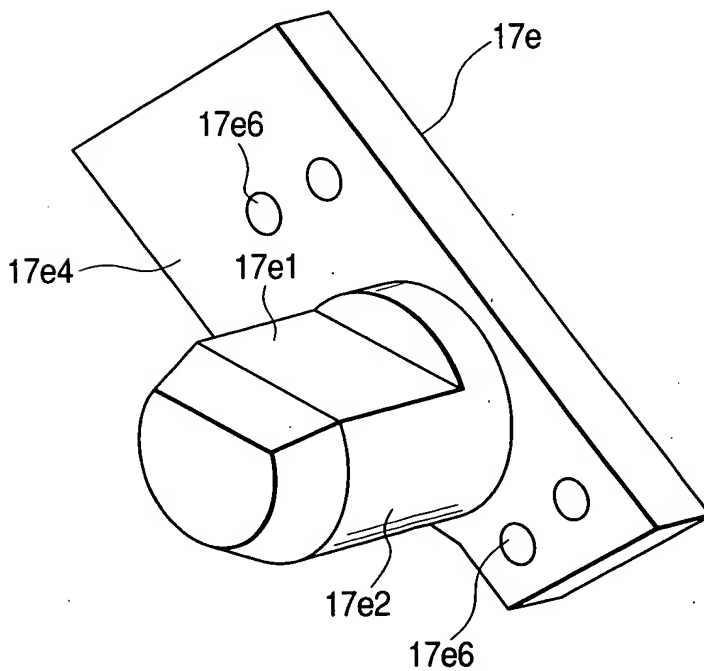


FIG. 35B






FIG. 36

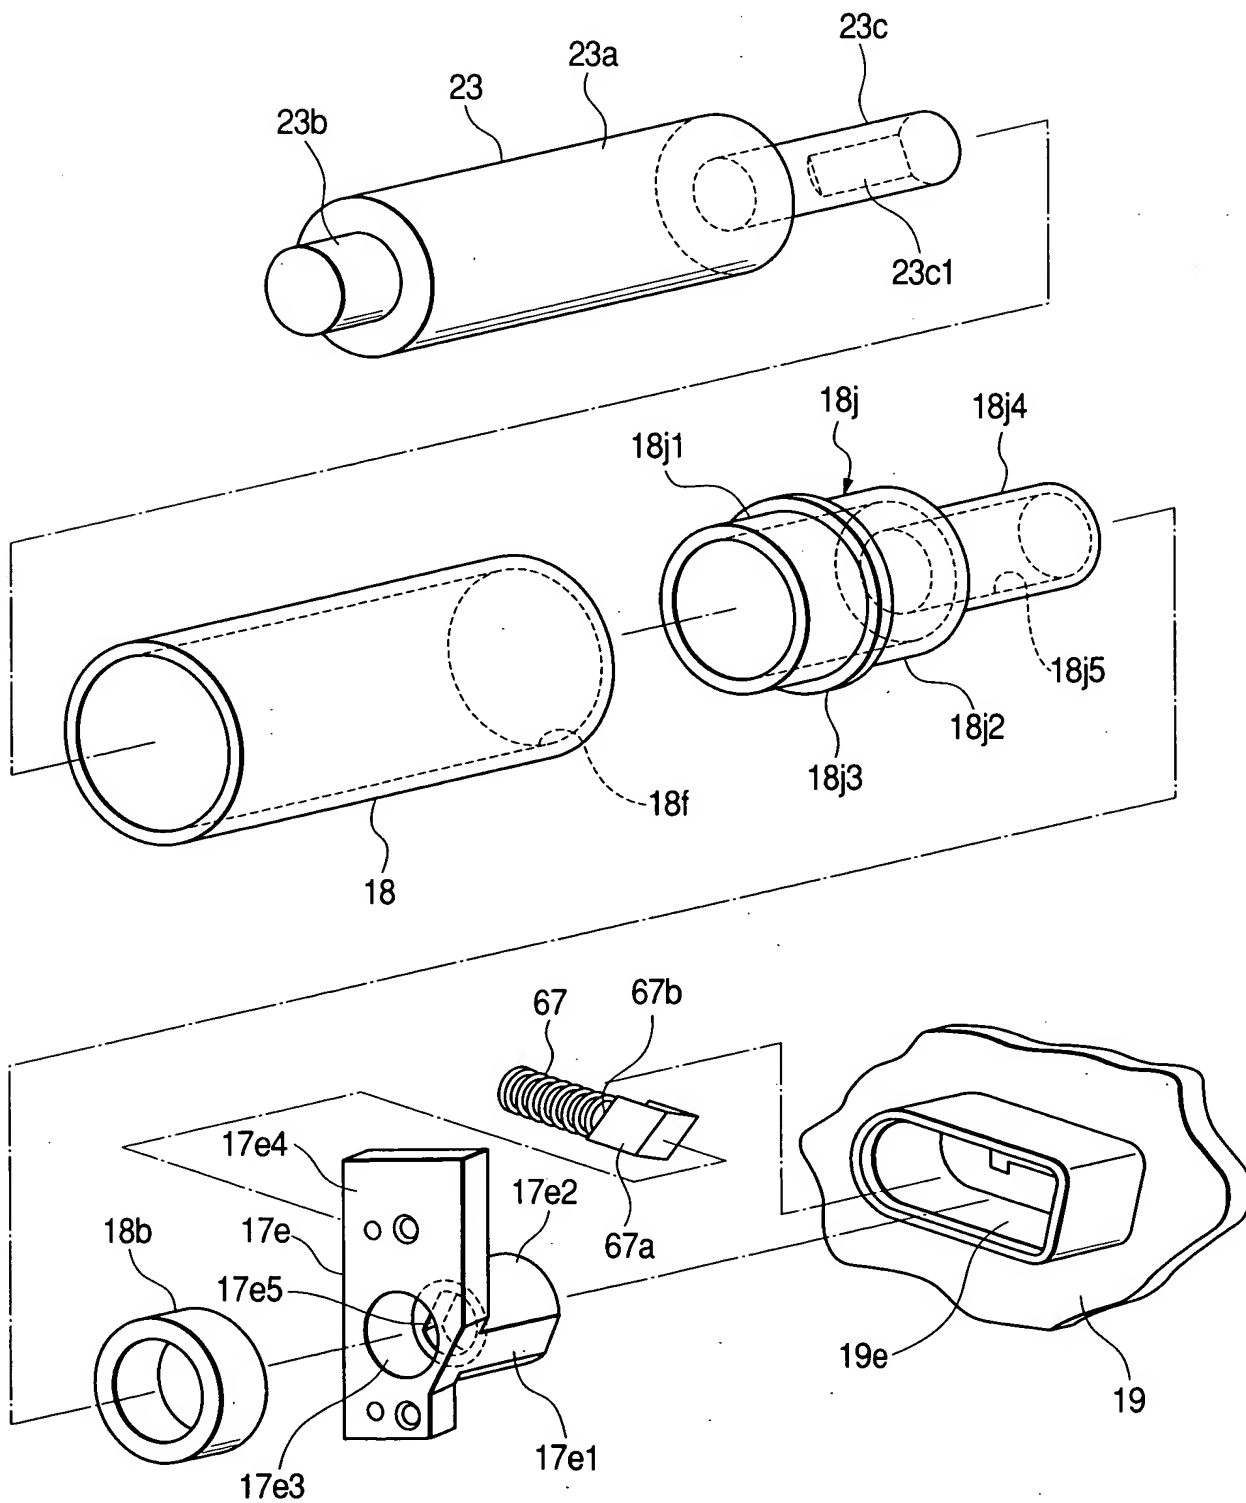
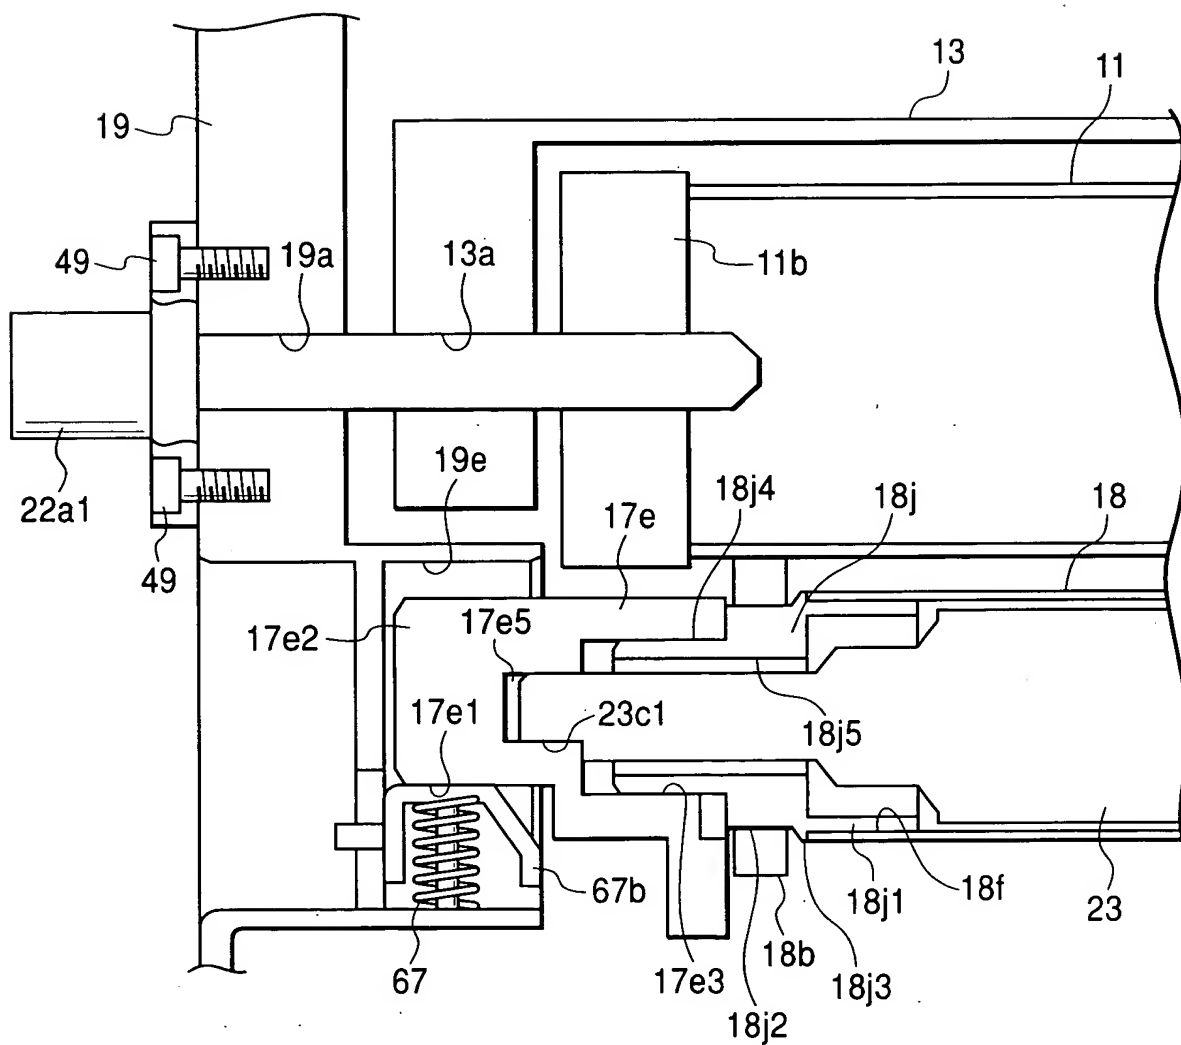


FIG. 37







FIG. 38



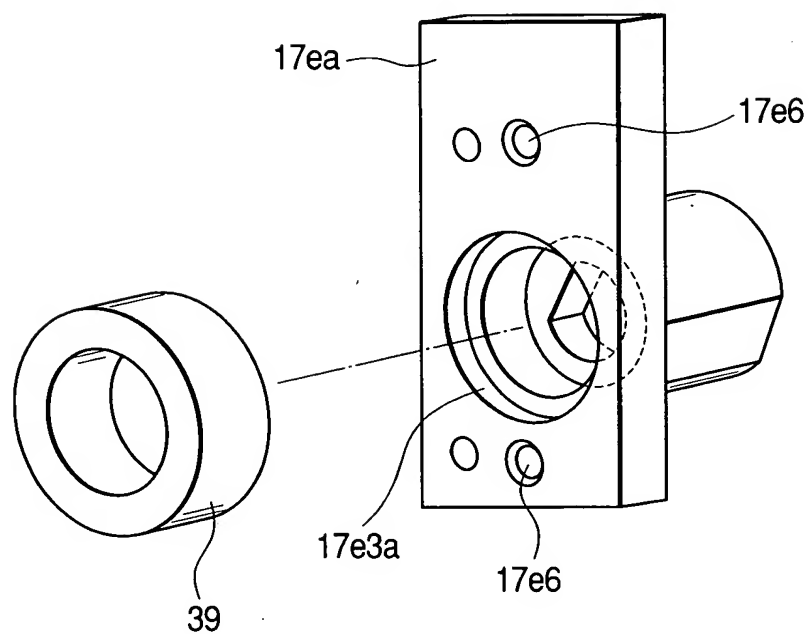

33 / 42

FIG. 39

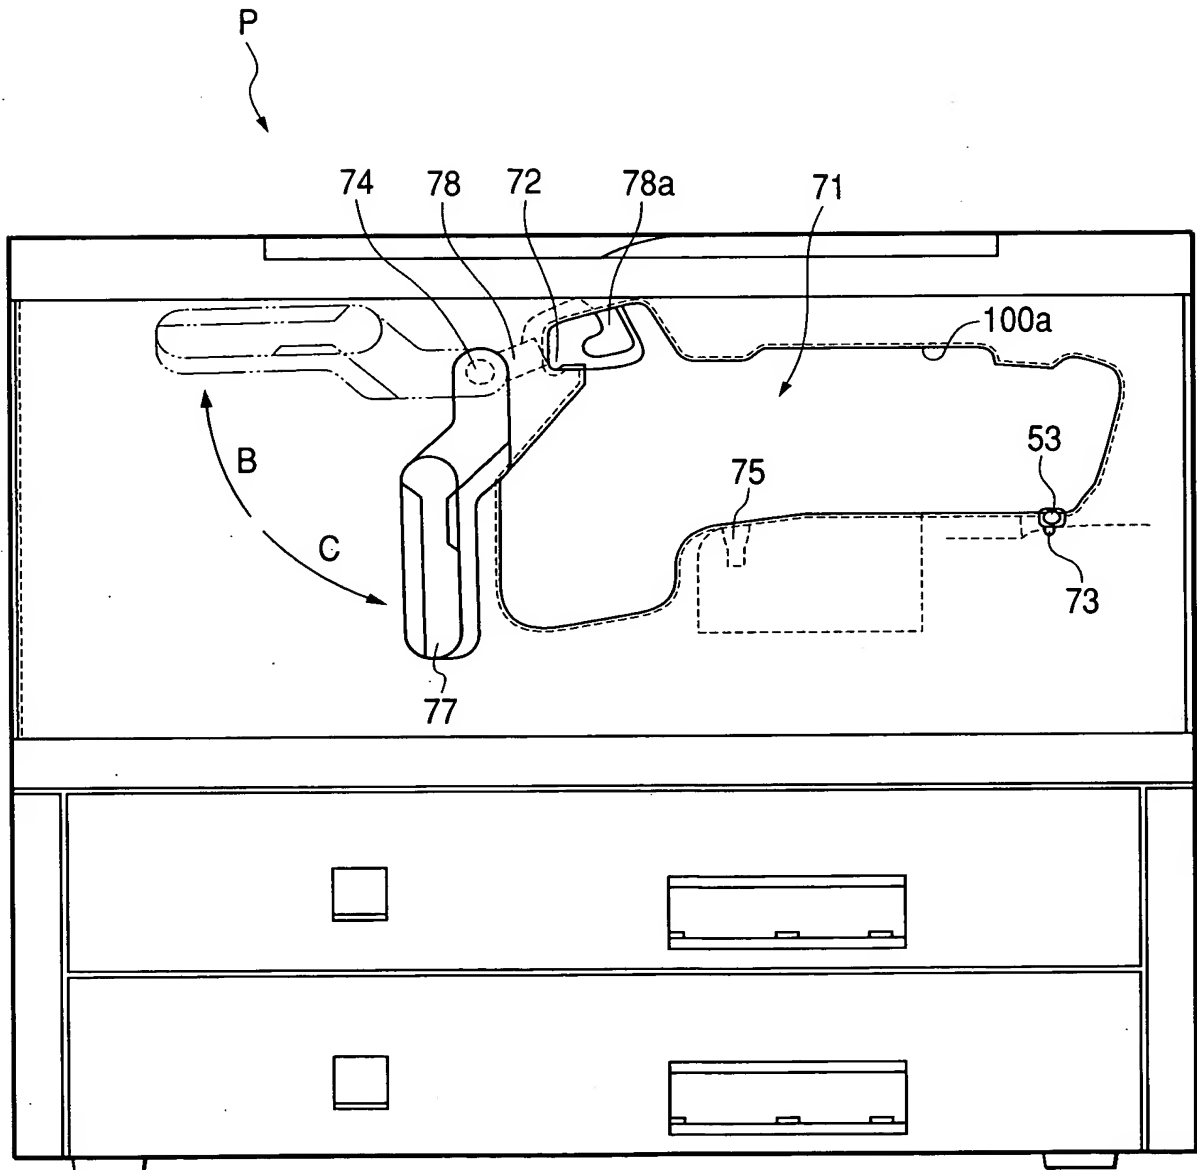




FIG. 40

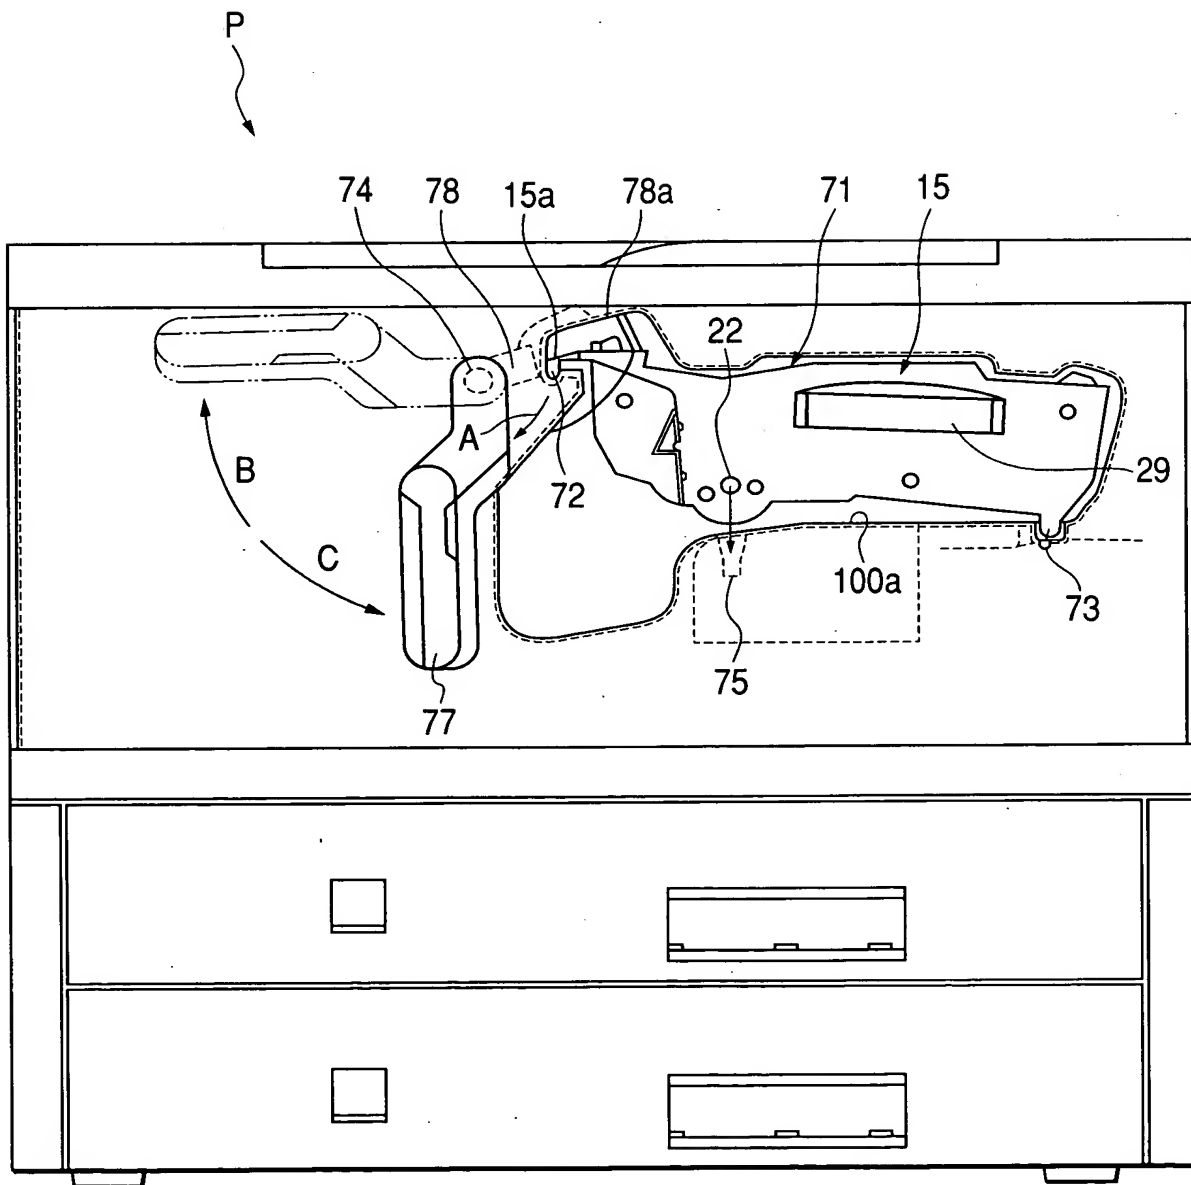




FIG. 41

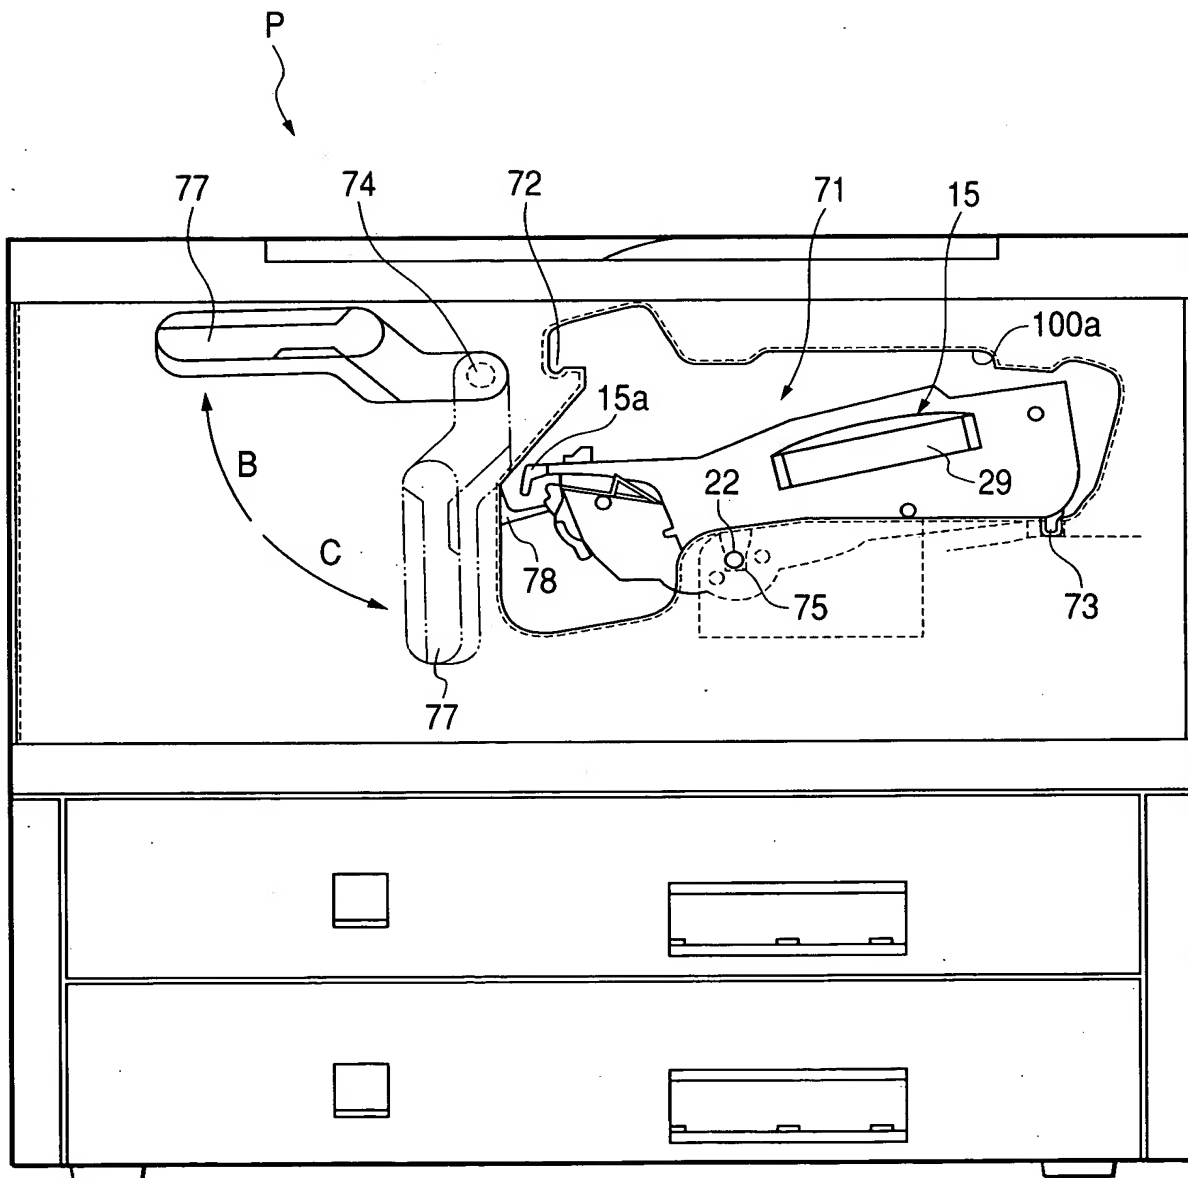




FIG. 42

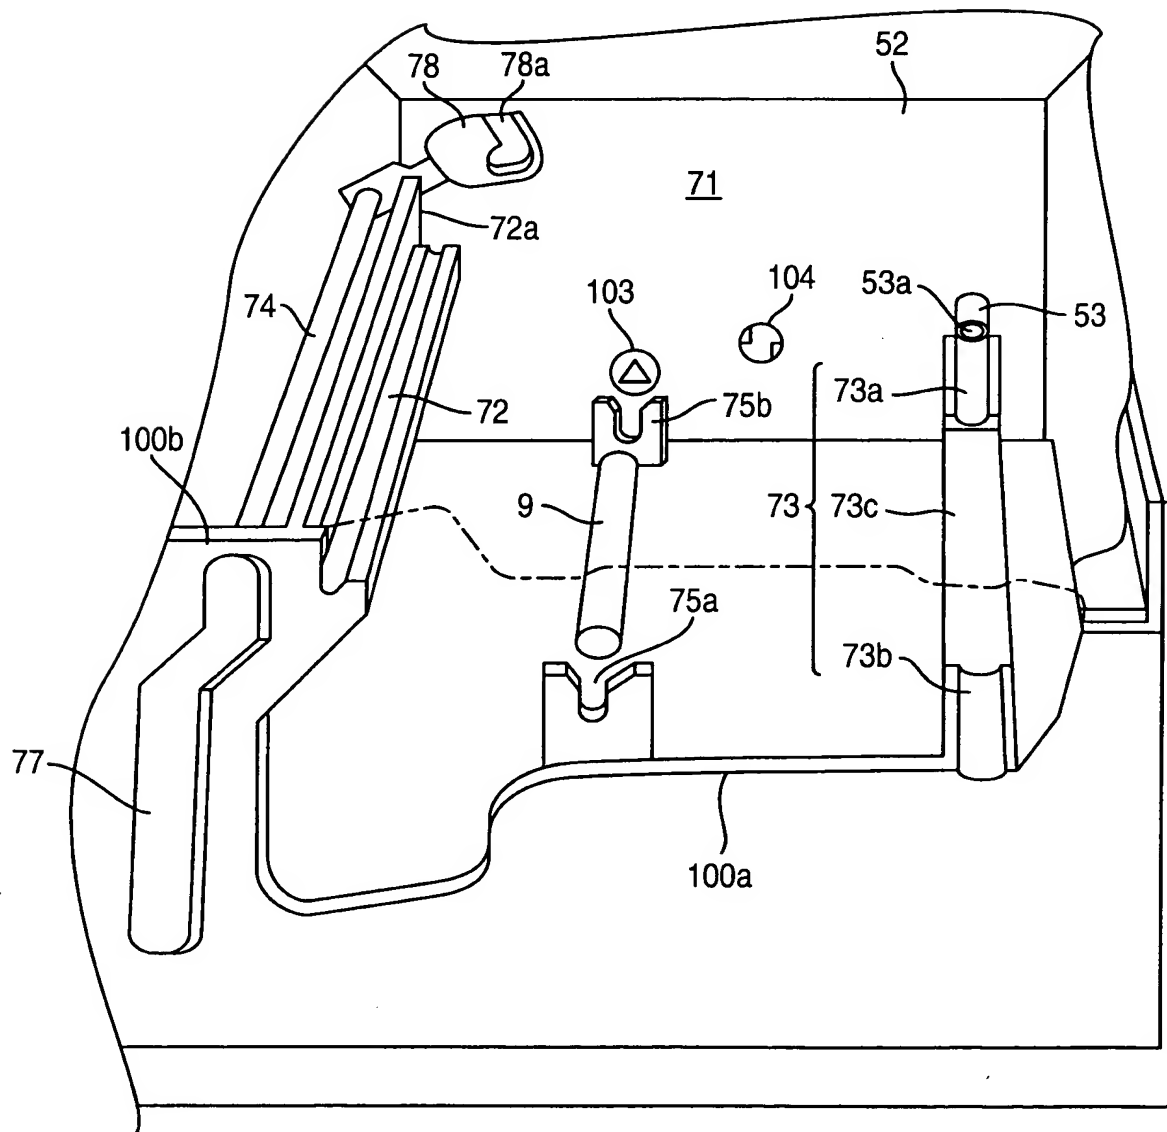




FIG. 43C

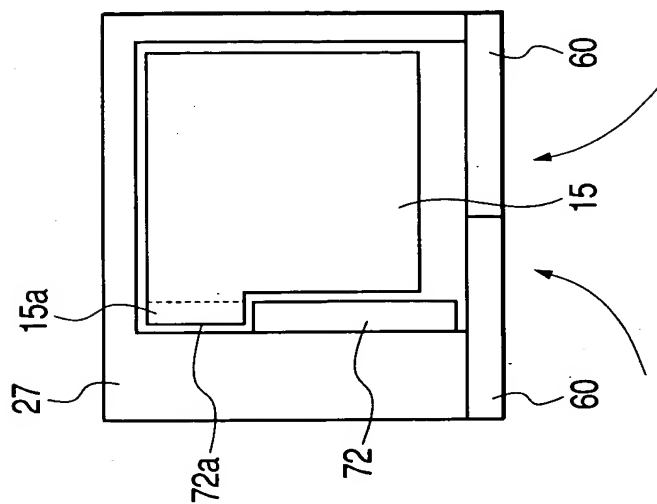


FIG. 43B

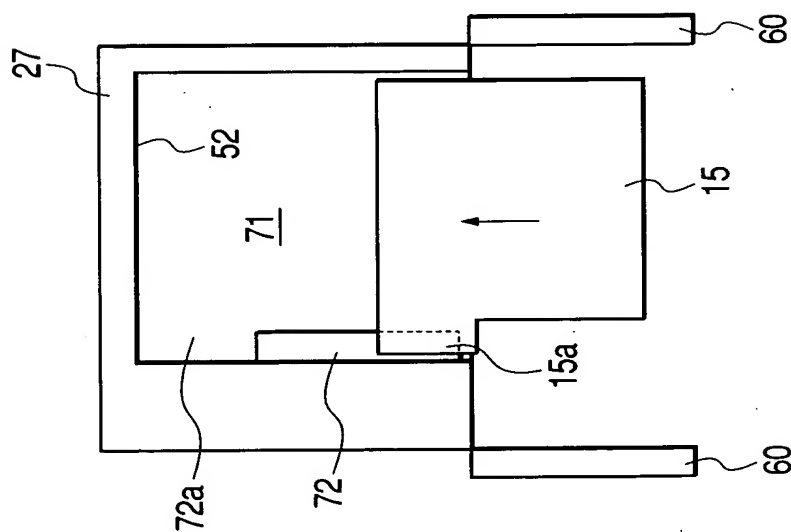


FIG. 43A

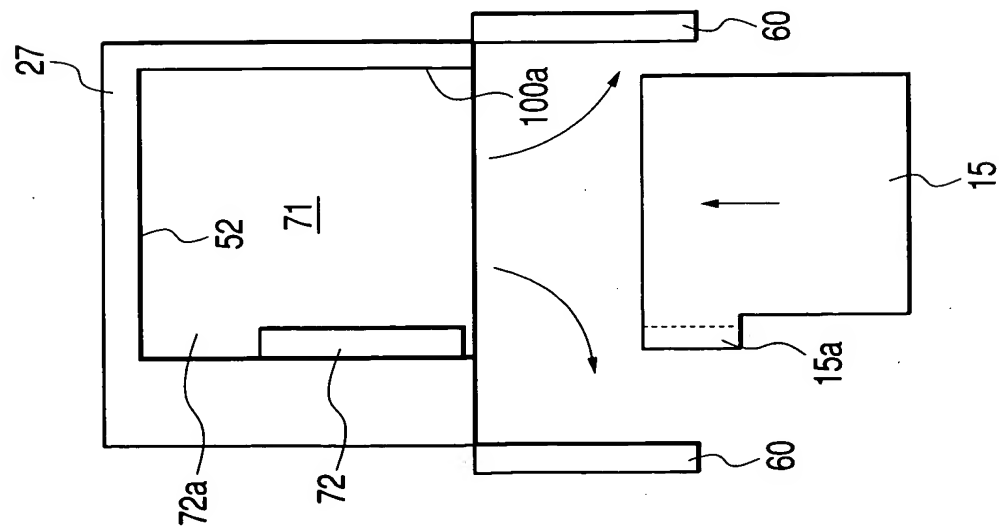




FIG. 44A

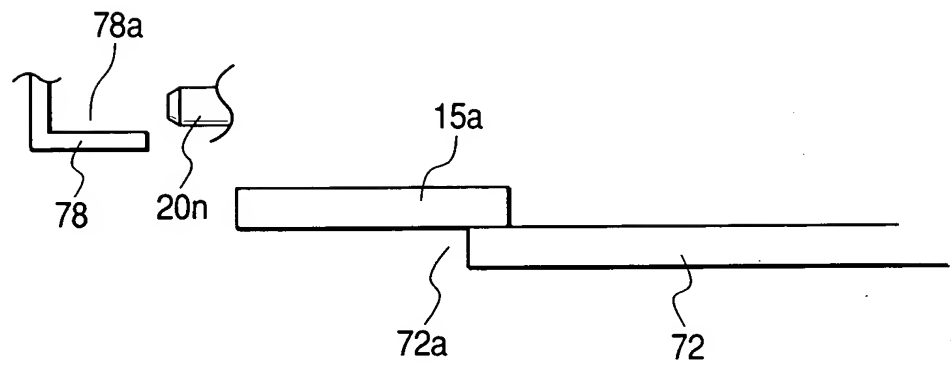


FIG. 44B

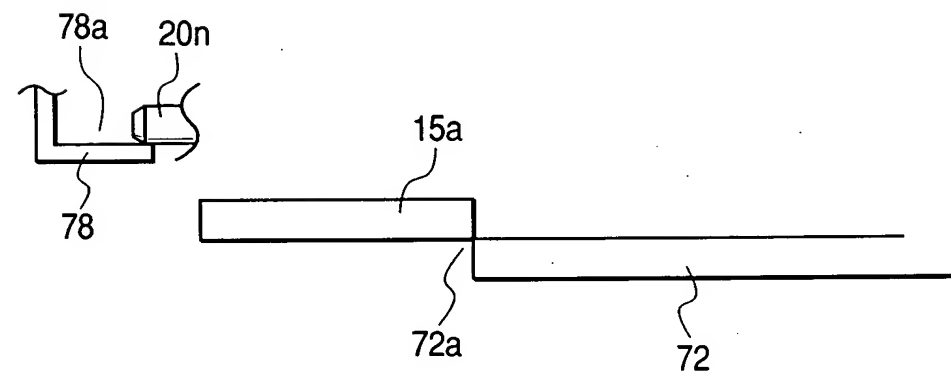


FIG. 44C

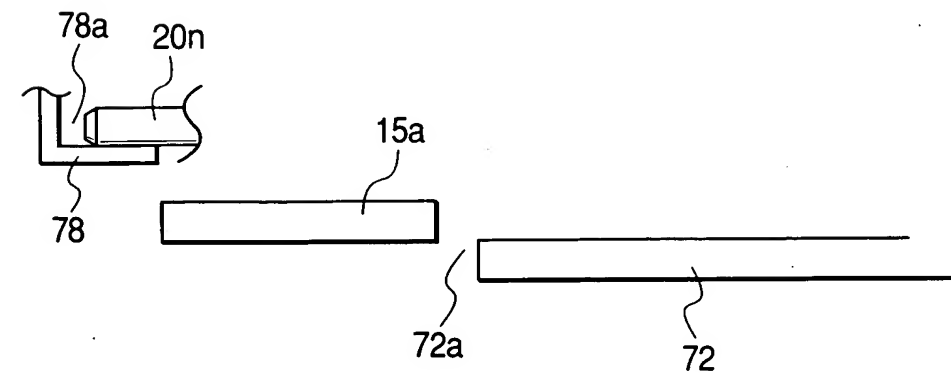




FIG. 45C

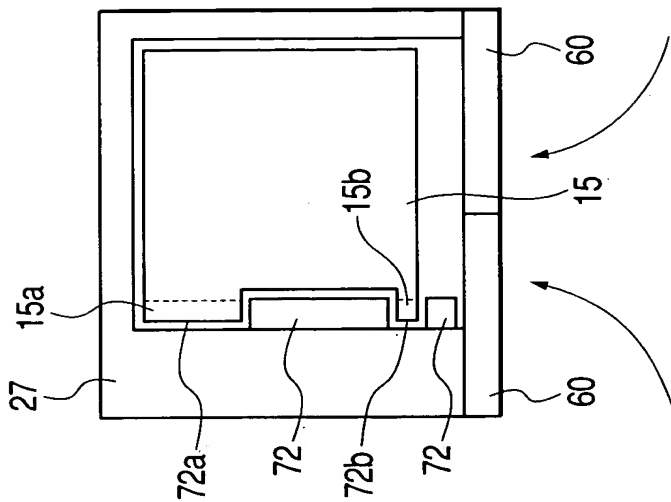


FIG. 45B

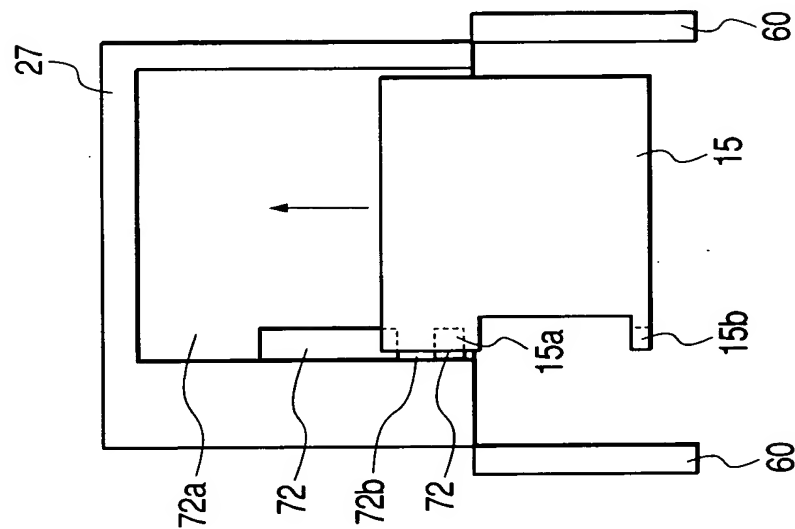


FIG. 45A

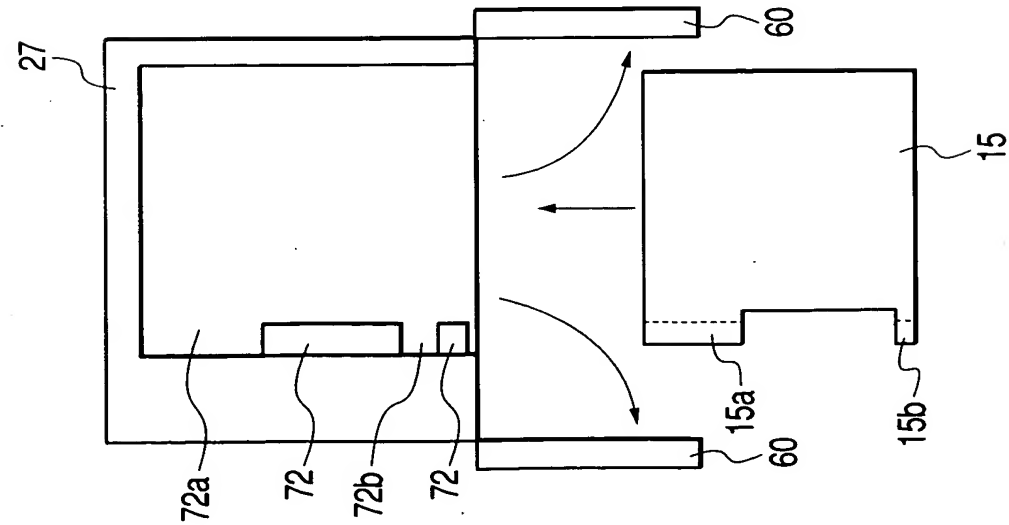
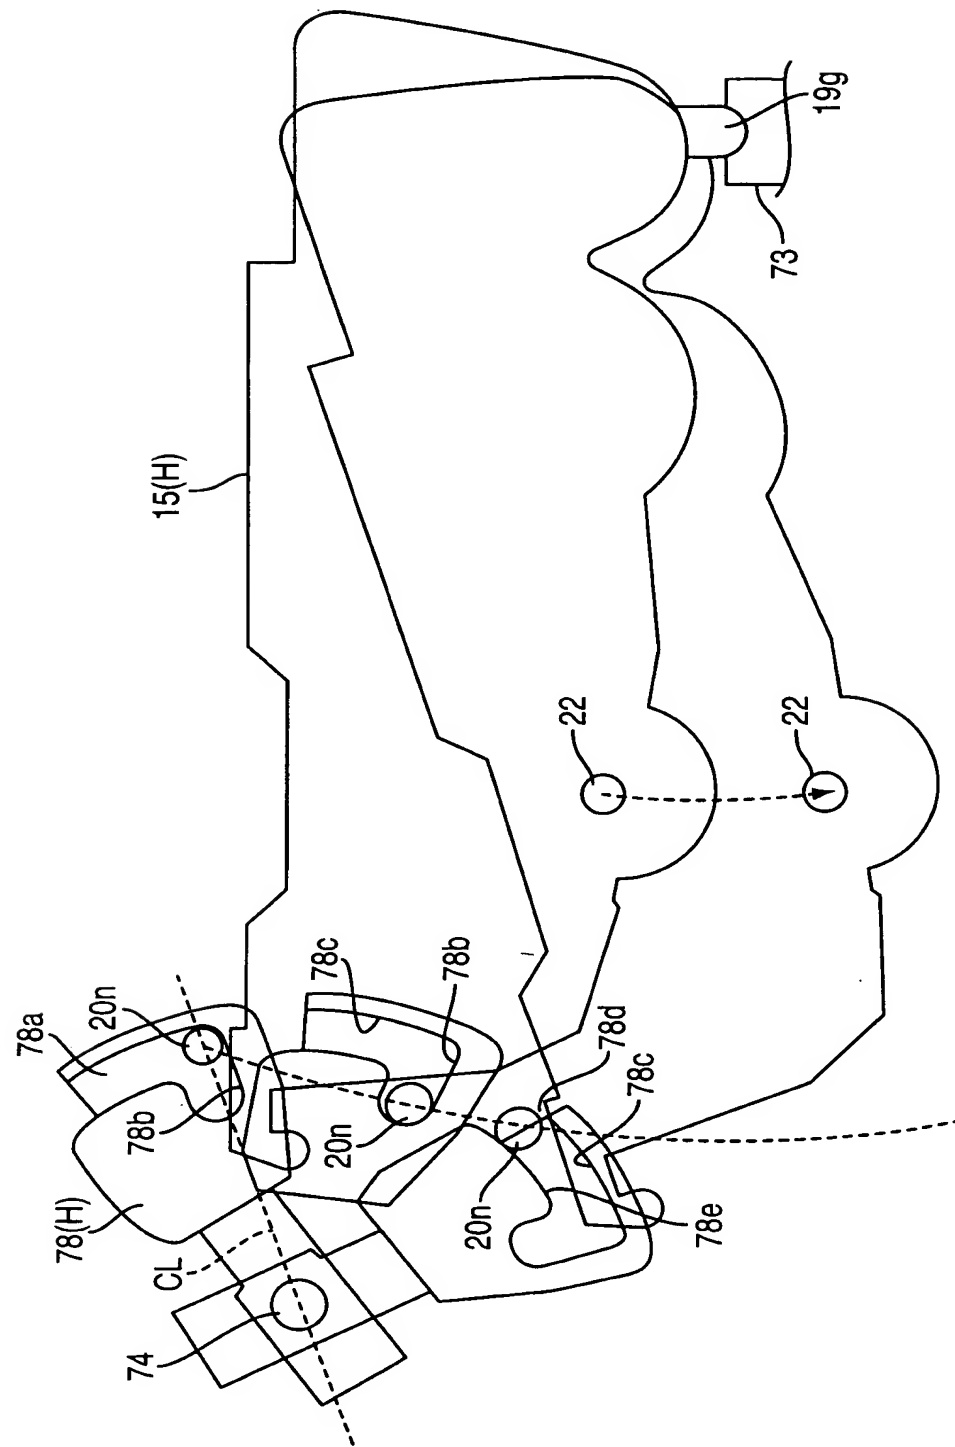




FIG. 46




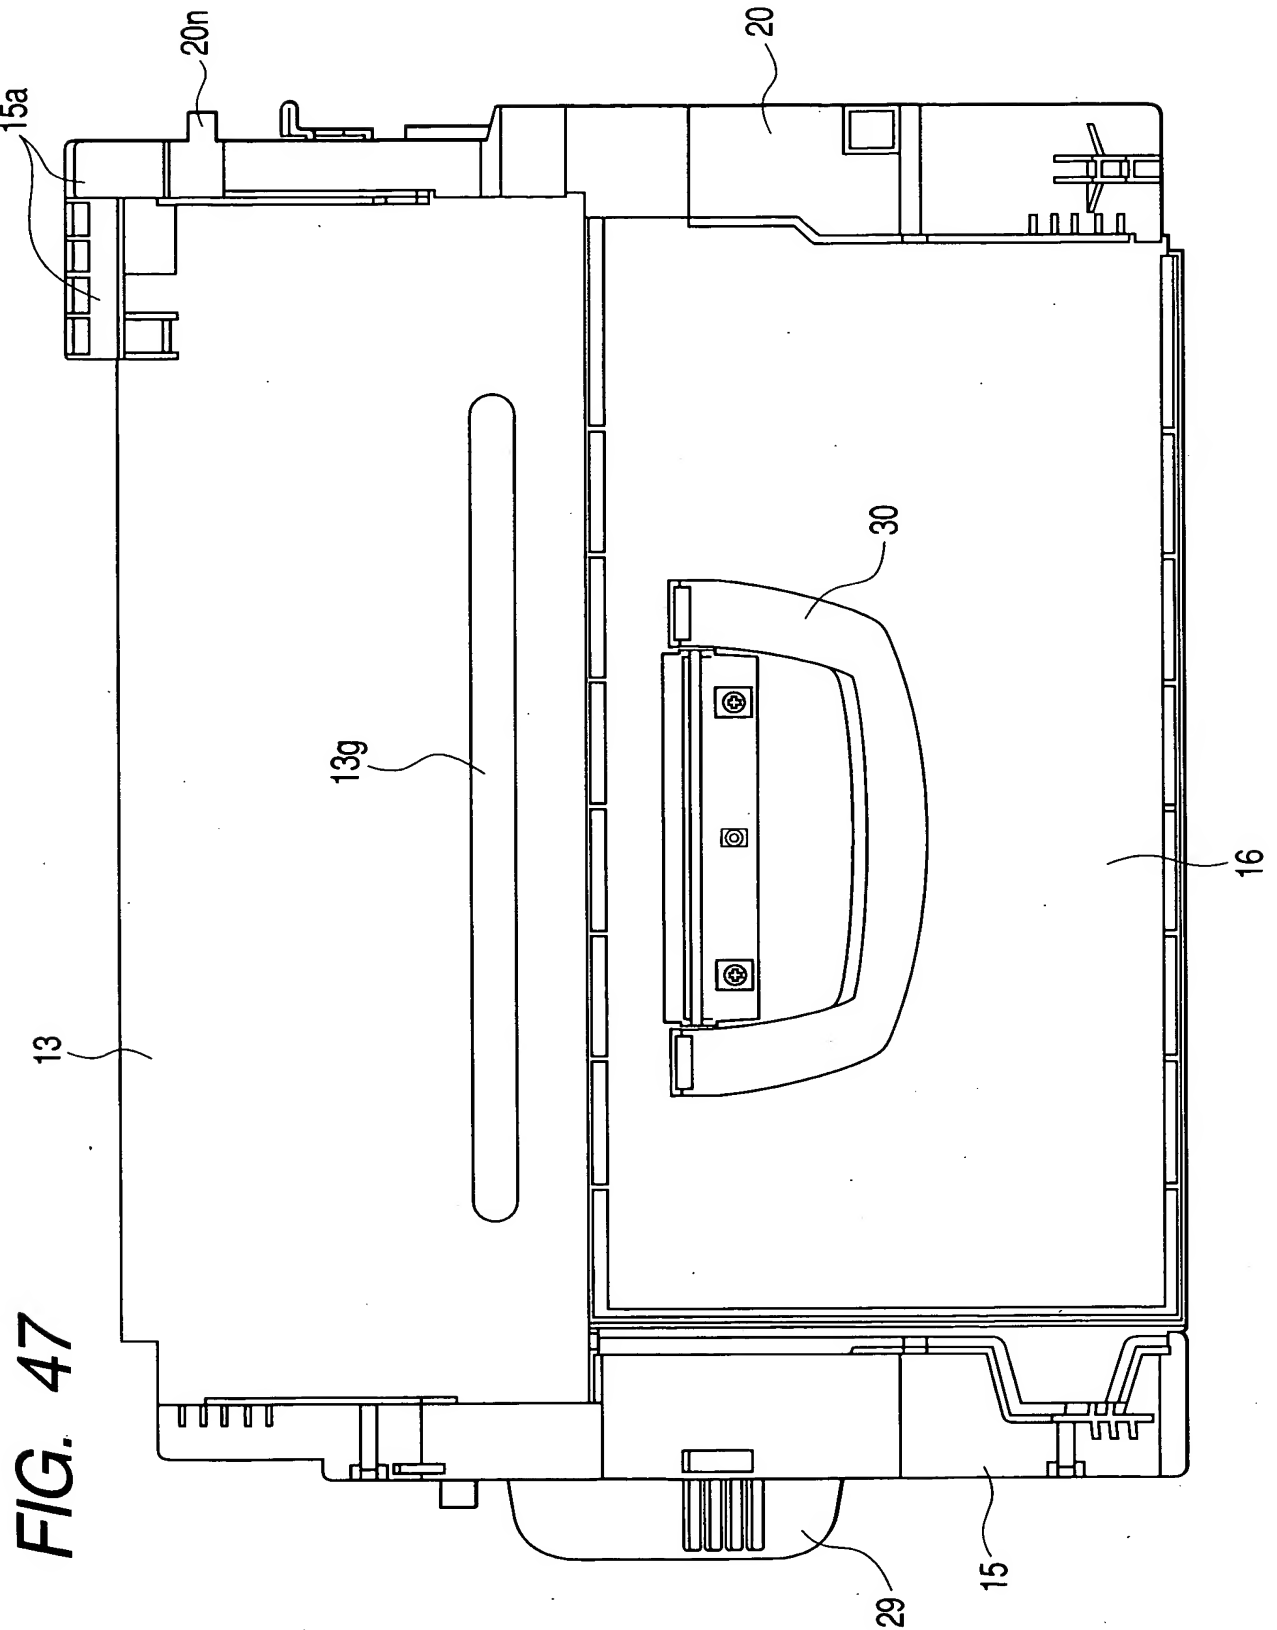


FIG. 47



42 / 42

FIG. 48

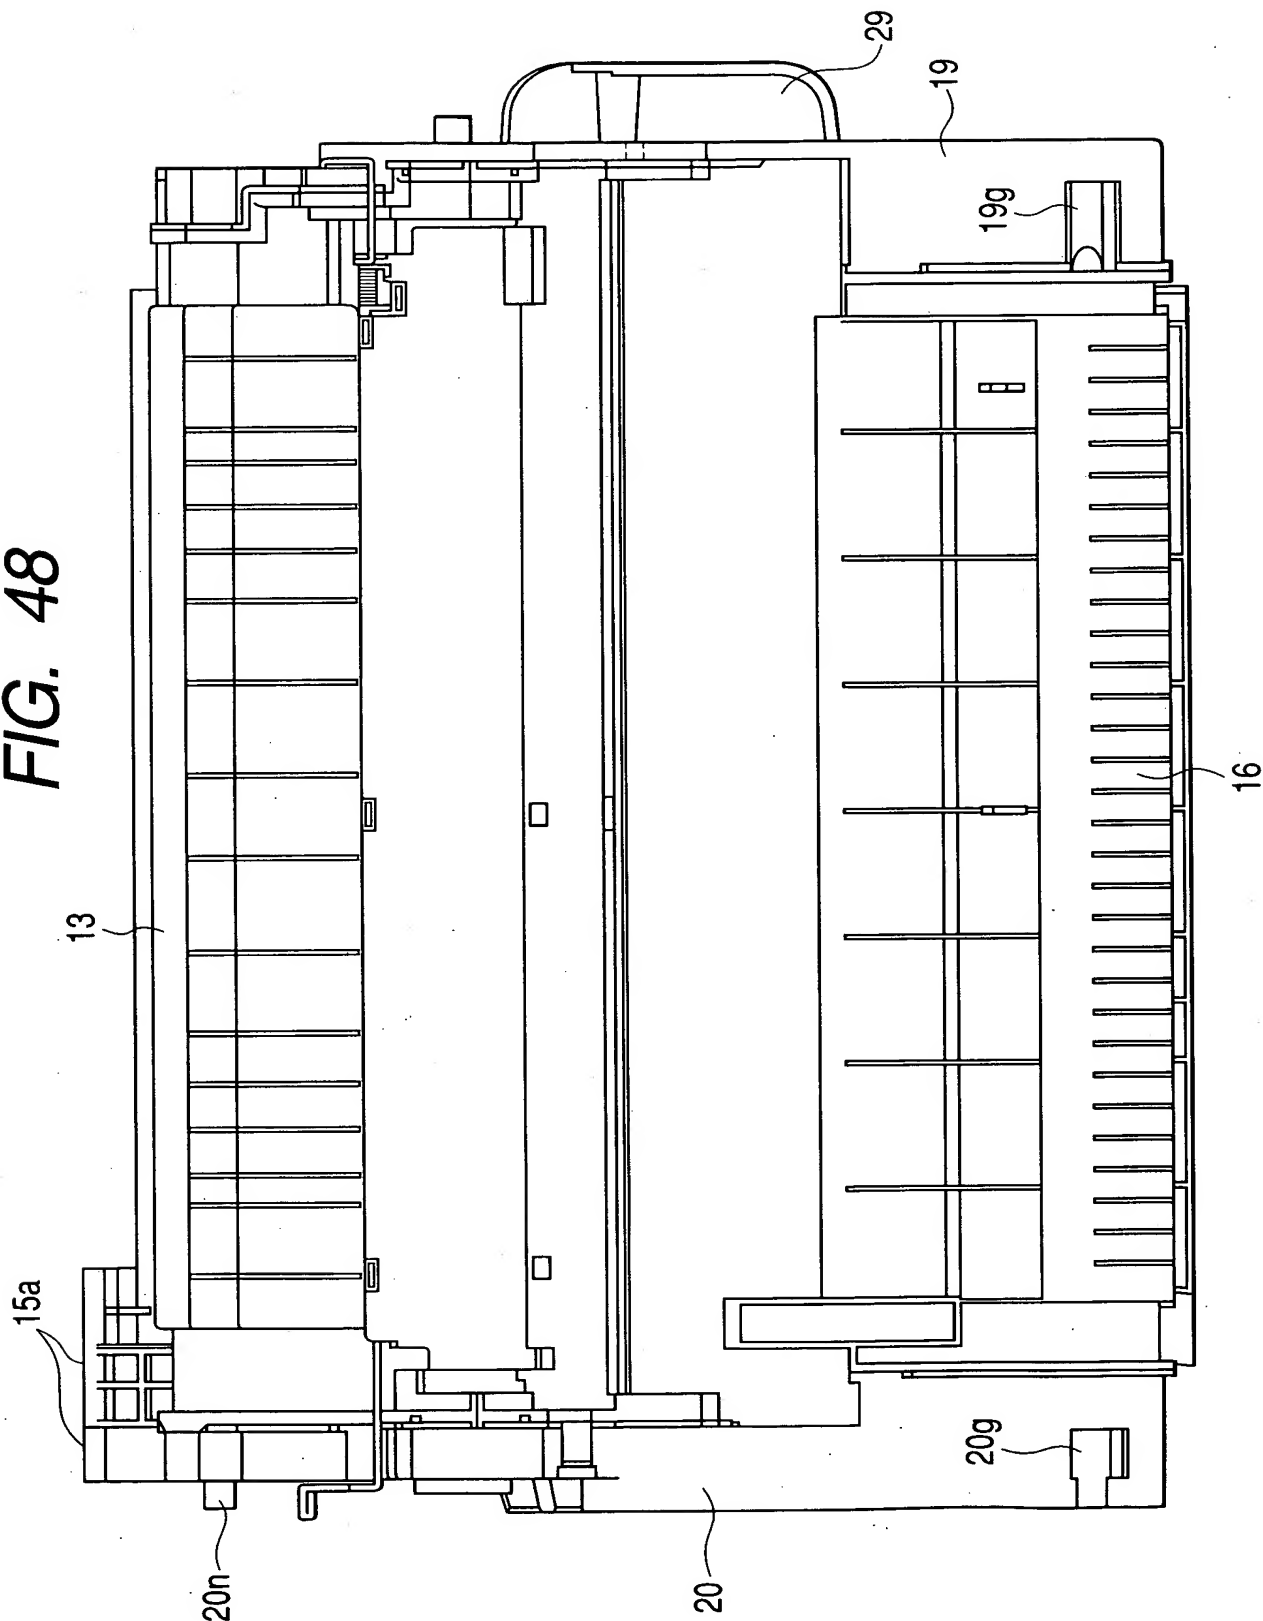



10/023,875

DECLARATION

RECEIVED
JAN 13 2004
TECHNOLOGY CENTER 2800

I, SEIICHIRO TAKAHASHI, a Japanese Patent Attorney registered No. 10740, of Okabe International Patent Office at No. 602, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo, Japan, hereby declare that I have a thorough knowledge of Japanese and English languages, and that the attached pages contain a correct translation into English of the priority documents of Japanese Patent Application No. 2000-392334 filed on December 25, 2000 in the name of CANON KABUSHIKI KAISHA.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made, are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signed this 2nd day of December, 2003

SEIICHIRO TAKAHASHI

PATENT OFFICE
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy
of the following application as filed with this office.

Date of Application: December 25, 2000

Application Number: Japanese Patent Application
No. 2000-392334

Applicant(s): CANON KABUSHIKI KAISHA


January 25, 2002

Commissioner,
Patent Office

KOZO OIKAWA

(Seal)

Certificate No. 2002-3000966



392334/2000

[Name of the Document] Patent Application

[Reference No.] 4158035

[Date] December 25, 2000

[Addressed to] Commissioner of the
Patent Office

[International Classification] G03G 15/00

[Title of the Invention] Developing Blade and Process
Cartridge

[Number of the Claims] 9

[Inventor]

 [Domicile or Residence] c/o Canon Kabushiki Kaisha
 30-2, 3-chome, Shimomaruko,
 Ohta-ku, Tokyo

 [Name] SHIGEO MIYABE

[Inventor]

 [Domicile or Residence] c/o Canon Kabushiki Kaisha
 30-2, 3-chome, Shimomaruko,
 Ohta-ku, Tokyo

 [Name] SHINJIRO TOBA

[Applicant]

 [Identification No.] 000001007

 [Name] CANON KABUSHIKI KAISHA

 [Representative] FUJIO MITARAI

[Attorney]

 [Identification No.] 100072246

 [Patent Attorney]

 [Name] ICHIRO ARAI

 [Telephone Number] 045-891-7788

[Indication of Official Fee]

 [Prepayment Ledger No.] 066051

[Amount] 21000

[List of Filed Materials]

[Material] Specification 1

[Material] Drawings 1

[Material] Abstract 1

[General Power of Attorney] 9703959

[Proof requirement] necessary

CFO16050

392334/2000

[Name of the Document] Specification

[Title of the Invention] Developing Blade and Process

5 Cartridge

[Claims]

[Claim 1] A process cartridge that is detachably mountable to a main body of an image forming apparatus, the process cartridge comprising:

10 an electrophotographic photosensitive drum;

a developing roller for developing an electrostatic latent image formed on the electrophotographic photosensitive drum;

15 a developing blade, which is integrally fixed to a fixing member, for regulating developer on a surface of the developing roller;

a developing frame that rotatably supports the developing roller, and that supports the fixing member;

20 a drum frame that rotatably supports the electrophotographic photosensitive drum and supports the developing frame rockably; and

a biasing member to bias the developing roller toward the electrophotographic photosensitive drum, and its one end is attached to at least one end of the fixing member in a lengthwise direction of the developing roller.

[Claim 2] A process cartridge according to Claim

1, wherein the other end of the biasing member is attached to the drum frame.

[Claim 3] A process cartridge according to Claim 1 or 2, wherein each of the biasing member and the
5 fixing member is made of a conductive material.

[Claim 4] A process cartridge according to any one of Claims 1-3, wherein the fixing member is the same as a potential of the developing roller, and a voltage is applied to the fixing member through the
10 biasing member.

[Claim 5] A process cartridge according to any one of Claims 1-4, wherein the one end of the fixing member protrudes from a side end surface of the one end of the developing frame.

15 [Claim 6] A process cartridge according to any one of Claims 1-5, wherein the biasing member is an extension coil spring, and has a straight line portion extending substantially perpendicular to the coil spring at its end portion.

20 [Claim 7] A process cartridge that is detachably mountable to a main body of an image forming apparatus, the process cartridge comprising:

an electrophotographic photosensitive drum;
a developing roller for developing an
25 electrostatic latent image formed on the electrophotographic photosensitive drum;
developing blade, which is integrally fixed to a

fixing member, for regulating developer on a surface of the developing roller;

a developing frame that rotatably supports the developing roller, and that supports the fixing member;

5 a drum frame that rotatably supports the electrophotographic photosensitive drum and supports the developing frame rockably;

a developer containing frame that contains developer to be supplied to the developing roller;

10 a flexible member to cover an opening for passing the developer provided on a surface on which the developing frame and the developer containing frame are opposed to each other and to connect the developing frame and the developer containing frame flexibly with
15 each other;

a first end cover that almost covers one end surface of the drum frame, developing frame, and developer containing frame in a lengthwise direction of the photosensitive drum and performs positioning of at
20 least the drum frame and the developer containing frame;

a second end cover that almost covers the other end surface of the drum frame, developing frame, and developer containing frame and performs positioning of
25 at least the drum frame and the developer containing frame; and

a biasing member to bias the developing roller

toward the electrophotographic photosensitive drum, and its one end is attached to at least one end of the fixing member in a lengthwise direction of the photosensitive drum and another end is attached to the drum frame.

[Claim 8] A process cartridge according to Claim 7, wherein each of the biasing member and the fixing member attached to the first end cover side is made of a conductive material, and

the biasing material is electrically connected to the conductive material for applying high voltage to the developing roller attached to the first end cover.

[Claim 9] A developing blade for use in a process cartridge, the process cartridge comprising:

an electrophotographic photosensitive drum;

a developing roller for developing an electrostatic latent image formed on the electrophotographic photosensitive drum;

a developing blade, which is integrally fixed to a fixing member, for regulating developer on a surface of the developing roller;

a developing frame that rotatably supports the developing roller, and that supports the fixing member;

a drum frame that rotatably supports the electrophotographic photosensitive drum and supports the developing frame rockably; and

a biasing member to bias the developing roller

toward the electrophotographic photosensitive drum,
wherein the fixing member of the developing blade
is provided with an attachment portion to which the
biasing member is attached.

5 [Detailed Description of the Invention]

[0001]

[Field of the Invention]

The present invention relates to a process
cartridge and a developing blade that is detachably
10 mountable to a main body of an electrophotographic
image forming apparatus.

[0002]

Here, the electrophotographic image forming
apparatus (hereinafter referred to as the "image
15 forming apparatus") means an apparatus that forms an
image on a recording medium using an
electrophotographic image forming process. Examples of
the image forming apparatus are an electrophotographic
copying machine, an electrophotographic printer (for
20 instance, an LED printer, a laser beam printer, and the
like), an electrophotographic facsimile apparatus, and
an electrophotographic word processor.

[0003]

Also, the process cartridge may integrally
25 incorporate a charging means, a developing means, or a
cleaning means, and an electrophotographic
photosensitive member into a cartridge that is

detachably mountable to a main body of the image forming apparatus. Alternatively, the process cartridge may integrally incorporate the electrophotographic photosensitive member and at least one of the charging means, the developing means, and the cleaning means into a cartridge that is detachably mountable to the main body of the image forming apparatus. Further alternatively, the process cartridge may integrally incorporate at least the developing means with an electrophotographic photosensitive drum into a cartridge that is detachably mountable to the main body of the image forming apparatus.

[0004]

15 [Conventional Art]

A process cartridge is composed of a cleaning unit and a developing unit. The cleaning unit integrally includes a charging means, a cleaning means, and a photosensitive drum, and the developing unit integrally includes a developing means and toner supplied to the developing means. The cleaning unit and the developing unit are integrally connected to each other using a connecting member, thereby obtaining the process cartridge (see Fig. 33).

25 [0005]

In an image forming apparatus employing an electrophotographic method, it becomes necessary to

exchange a photosensitive drum, to replenish or
exchange developer, and to adjust, clean, or exchange
other components (such as a charger and a cleaner
container) when the operating time of the image forming
5 apparatus becomes long. In reality, however, such
maintenance work is difficult for a person who is not a
serviceman having expert knowledge.

[0006]

As to the aforementioned process cartridge, there
10 is publicly known a construction in which a
photosensitive unit, which supports an
electrophotographic photosensitive member, a cleaning
means, and the like, is connected to a developing unit,
which supports a developing means, using a connecting
15 member.

[0007]

Therefore, the image forming apparatus that forms
an image on a recording medium using an
electrophotographic image forming process adopts a
20 process cartridge system in which the
electrophotographic photosensitive member and a process
means acting on this electrophotographic photosensitive
member are integrally made into a cartridge which is
detachably mountable to the main body of the image
25 forming apparatus. In accordance with this process
cartridge system, the image forming apparatus can be
personally maintained by a user without relying on a

serviceman, so that operability can be greatly improved. Therefore, this process cartridge system can be used in a wide variety of image forming apparatuses.
[0008]

5 In the process cartridge, the developing unit is rotatably supported about a rotational axis with respect to the photosensitive unit and is biased toward the photosensitive unit side by the self-weight of the developing unit or a pressurizing member like a spring.
10 That is, a developer bearing member in the developing unit is biased against the electrophotographic photosensitive member in the photosensitive unit through a space maintaining member. With this construction, a constant minute space is always
15 maintained between the electrophotographic photosensitive member and the developer bearing member, whereby fine images can be outputted with stability.
[0009]

[Problem to be Solved by the Invention]

20 As to the process cartridge, it is desired that the accuracy of mounting positions of parts related to image formation be further improved in order to further improve image quality.
[0010]

25 As to the process cartridge, further cost reduction is also desired.
[0011]

The present invention is a further development of the above-mentioned construction and its object is to provide a process cartridge and a developing blade that achieve space saving, reduce the number of parts, and
5 obtain fine images without image defects by maintaining a pressurizing force of a developing roller against an electrophotographic photosensitive drum at an optimal value and thereby maintaining a constant space between the electrophotographic photosensitive drum and the
10 developing roller at all times.

[0012]

Another object of the present invention is to provide a process cartridge and a developing blade with which there is obtained a simplified construction of a
15 voltage applying means, a voltage from the voltage applying means being added to the developing blade in order to obtain a potential of the developing blade that is the same as a potential of a developing roller.

[0013]

20 [Means for solving the Problem]

Main points of the present invention are as described below with the corresponding numbers of claims.

[0014]

25 The first invention related to this application is a process cartridge that is detachably mountable to a main body of an image forming apparatus, the process

cartridge comprising an electrophotographic
photosensitive drum, a developing roller for developing
an electrostatic latent image formed on the
electrophotographic photosensitive drum, a developing
5 blade, which is integrally fixed to a fixing member,
for regulating developer on a surface of the developing
roller, a developing frame that rotatably supports the
developing roller, and that supports the fixing member,
a drum frame that rotatably supports the
10 electrophotographic photosensitive drum and supports
the developing frame rockably, and a biasing member to
bias the developing roller toward the
electrophotographic photosensitive drum, and its one
end is attached to at least one end side of the fixing
15 member in a lengthwise direction of the developing
roller.

[0015]

The seventh invention related to this application
is a process cartridge that is detachably mountable to
20 a main body of an image forming apparatus, the process
cartridge comprising an electrophotographic
photosensitive drum, a developing roller for developing
an electrostatic latent image formed on the
electrophotographic photosensitive drum, developing
25 blade, which is integrally fixed to a fixing member,
for regulating developer on a surface of the developing
roller, a developing frame that rotatably supports the

developing roller, and that supports the fixing member,
a drum frame that rotatably supports the
electrophotographic photosensitive drum and supports
the developing frame rockably, a developer containing
5 frame that contains developer to be supplied to the
developing roller, a flexible member to cover an
opening for passing the developer provided on a surface
to which the developing frame and the developer
containing frame face with each other and to connect
10 the developing frame and the developer containing frame
flexibly with each other, a first end cover that almost
covers one end face of the drum frame, developing
frame, and developer containing frame in a lengthwise
direction of the photosensitive drum and performs
15 positioning of at least the drum frame and the
developer containing frame, a second end cover that
almost covers the other end face of the drum frame,
developing frame, and developer containing frame and
performs positioning of at least the drum frame and the
20 developer containing frame, and a biasing member to
bias the developing roller toward the
electrophotographic photosensitive drum, and its one
end is attached to at least one end side of the fixing
member in a lengthwise direction of the developing
25 roller and another end is attached to the drum frame.
[0016]

The ninth invention related to this application is

a developing blade for use in a process cartridge comprising an electrophotographic photosensitive drum, a developing roller for developing an electrostatic latent image formed on the electrophotographic photosensitive drum, a developing blade, which is integrally fixed to a fixing member, for regulating developer on a surface of the developing roller, a developing frame that rotatably supports the developing roller, and that supports the fixing member, a drum frame that rotatably supports the electrophotographic photosensitive drum and supports the developing frame rockably, and a biasing member to bias the developing roller toward the electrophotographic photosensitive drum, wherein the fixing member is provided with an attachment portion to which the biasing member is attached.

[0017]

[Embodiments]

Embodiments of the present invention will be described with reference to Figs. 1 to 9. In this embodiment, the lengthwise direction means a direction that is perpendicular to a direction, in which a recording medium is transported, and is parallel to a plane of the recording medium. Also, the upper surface and the lower surface of a process cartridge respectively refer to the upper surface and the lower surface thereof under a condition where the process

cartridge is mounted to the main body of an image forming apparatus.

[0018]

(Description of Process Cartridge and Main Body of
5 Apparatus)

Fig. 2 is a main cross-sectional view of a process cartridge according to the present invention, while Fig. 1 is a main cross-sectional view of an image forming apparatus according to the present invention.
10 This process cartridge is provided with an electrophotographic photosensitive member and process means acting on the electrophotographic photosensitive member. Here, for instance, the process means includes a charging means for charging a surface of the
15 electrophotographic photosensitive member, a developing means for developing an electrostatic latent image formed on the electrophotographic photosensitive member, and a cleaning means for removing residual developer on the surface of the electrophotographic
20 photosensitive member.

[0019]

In a process cartridge 15 of this embodiment, as shown in Fig. 2, a charging member 12 functioning as a charging means, a developing roller 18 and a developing
25 blade 26 functioning as developing means, and a cleaning member 14 functioning as a cleaning means are disposed around an electrophotographic photosensitive

drum 11. These components are integrally covered with a housing, thereby obtaining the process cartridge 15 that is constructed so as to be freely attached to and detached from the main body 27 of the image forming apparatus (hereinafter referred to as the "apparatus body"). Here, the charging member 12 is a charging roller and includes rubber of a middle resistance provided around its metal core. Also, the cleaning member 14 is obtained by fixing a rubber blade, which contacts the photosensitive drum 11 and scraps off transfer residual toner, to an attachment sheet metal.

[0020]

This process cartridge 15 is mounted to the electrophotographic image forming apparatus C shown in Fig. 1 and is used to form images. During the image formation, a sheet S functioning as a recording medium is transported by transport rollers 7 from sheet cassettes 6 mounted in a lower portion of the apparatus, and a latent mage is formed by selectively exposing the photosensitive drum 11 from an exposing device 8 in synchronism with the transportation of this sheet. Following this, toner contained in a toner container 16 is given frictional electrification charge by the developing blade 26, a thin layer of the toner is bore on the surface of the developing roller 18, and a developing bias is applied to the developing roller 18, thereby supplying the toner in accordance with the

latent image. This toner image is transferred onto the sheet S, which functions as a transported recording medium, by the application of a bias voltage to a transfer roller 9. This sheet S is transported to a fixing device 10 to fix the image, and is delivered by sheet delivery rollers 1 to a delivery portion 2 located in the upper part of the apparatus.

[0021]

Meanwhile, after the transfer, residual toner on the photosensitive drum 11 is removed by the cleaning member 14 and is sent to the back of a removed toner reservoir 5 by a removed toner sending member 115.

[0022]

(Construction of Frame of Process Cartridge)

Figs. 3 to 9, 47, and 48 each show the constructions of frames of the process cartridge. Fig. 7 shows a state before these frames are assembled and Figs. 3 to 6 each show a state after these frames are assembled. As cartridge frame, the process cartridge 15 includes three frames: a cleaning frame 13 integrally supporting the photosensitive drum 11, the charging member 12, and the cleaning member 14; a developing frame (also called the "developing frame") 17 integrally supporting the developing roller 18 and the developing blade (not shown in Fig. 7, see reference numeral 26 in Fig. 2); and a developer frame 16 constructing a developer container 16h that contains

developer (hereinafter referred to as the "toner").
Note that the developer frame 16 is provided with a
developing under cover 45. Further, to combine these
three frames, both end surfaces of the cleaning frame
13 and the developer frame 16 are fixed using end
covers 19 and 20 and the developing frame 17 is
supported by the cleaning frame 13. Note that
hereinafter the frame supporting the photosensitive
drum 11 is also called the "drum frame".

10 [0023]

As described above, the process cartridge 15
includes the developing under cover 45. Here, when the
process cartridge 15 is mounted to the apparatus main
body 27, the developing under cover 45 is disposed at a
position below the developing roller 18 and the
developing blade 26 that are developing members. Also,
this developing under cover 45 functions as a part of
the external wall of the process cartridge 15.
Further, one lengthwise end of the developing under
cover 45 is connected to the rear end cover 19, and
also, the other lengthwise end is connected to the
front end cover 20.

[0024]

The rear end cover 19 includes a second handle 29,
as shown in Fig. 3. Here, when the process cartridge
is mounted to or detached from the apparatus main body
27, an operator grasps this second handle 29. Then,

the process cartridge 15 is mounted to or detached from the apparatus main body 27 along the lengthwise direction of the photosensitive drum 11. Further, during the mounting, it is possible to insert the process cartridge 15 to the back of the apparatus main body 27 and lower the position of the process cartridge 15, thereby placing the process cartridge 15 at a mounting position. During the detachment, it is possible to lift up the process cartridge 15 and pull out the process cartridge 15.

[0025]

The rear end cover 19 includes a hole portion 19a. Also, from the hole portion 19a, there protrudes a shaft 22a1 that extends outward concentrically with an axis functioning as a bearing of the photosensitive drum 11. Here, the shaft 22a1 is a part of a bearing member 22a, through which one end of the photosensitive drum 11 is supported by the cleaning frame 13. Also, when the process cartridge 15 is mounted to the apparatus main body 27, the shaft 22a1 is positioned in the apparatus main body 27. That is, the process cartridge 15 is inserted to the back of the apparatus main body 27 and the position thereof is lowered, whereby the axis (positioning member) 22a1 that is integrated with the drum axis is fitted in a positioning concave portion (to be described later) of the apparatus main body 27. Also, during the mounting

and detachment of the process cartridge 15 to and from the apparatus main body 27, guide portions 19g and 20g are supported by the apparatus main body 27.

[0026]

5 As shown in Figs. 5 and 47, there is provided a first handle 30 on the upper surface of the developer frame 16. Here, the upper surface refers to the surface that faces upward when the aforementioned process cartridge 15 is mounted to the apparatus main
10 body 27. Also, to transport the process cartridge 15, an operator grasps the first handle 30. This first handle 30 is contained in a concave portion 16e on the upper surface of the developer frame 16 and a base portion 30a of the first handle 30 is pivotally
15 attached to the developer frame 16 with pins (not shown) that are parallel in the lengthwise direction. When an operator uses the first handle 30, he/she rotates the first handle 30 about the pins to stand it.

[0027]

20 As shown in Figs. 2 and 5, the cleaning frame 13 includes an exposure opening 13g. Here, when the process cartridge 15 is mounted to the apparatus main body 27, information light to be irradiated onto the photosensitive drum 11 by the exposure device 8 of the
25 apparatus main body 27 passes through the exposure opening 13g.

[0028]

As shown in Fig. 4 and 7, the front end cover 20 includes a first hole portion 20a and a second hole portion 20e. Also, the first hole portion 20a is provided with a first coupling 105a functioning as a first driving force receiving portion that receives a driving force to rotate the photosensitive drum 11 from the apparatus main body 27 when the process cartridge 15 is mounted to the apparatus main body 27. This first coupling 105a, which is a portion to receive a driving force, is integrally formed with a flange 11a shown in Fig. 7. This flange 11a is fixed to one end of the photosensitive drum 11. Also, the second hole portion 20e is provided with a second coupling 106a functioning as a second driving force receiving portion that receives a driving force to rotate agitating members 113, 114, and 123 (see Fig. 2) that are toner supplying members for supplying toner contained in the developer container 16h of the developer frame 16 from the apparatus main body 27 when the process cartridge 15 is mounted to the apparatus main body 27.

[0029]

The developing frame 17 will be described in detail later.

[0030]

The end covers 19 and 20 each have an enough size to cover the main cross section (the vertical surface perpendicular to the lengthwise direction of the

photosensitive drum) of the process cartridge 15.

Also, these end covers are arranged at both lengthwise ends of the process cartridge 15. Further, these end covers each have an enough size to cover both of the cleaning frame 13 and the developer frame 16 and are each fixed to both of the cleaning frame 13 and the developer frame 16, thereby integrally combining the cleaning frame 13 and the developer frame 16 with each other.

10 [0031]

The hole portions 19a and 20a of these end covers 19 and 20 shown in Fig. 7 are positioned coaxially with the center of the photosensitive drum of the cleaning frame 13. On the illustrated rear end cover 19 side, as shown in Fig. 7, a bearing member 22a is press-fitted in a hole portion 13a of the cleaning frame 13. Also, putting through a flange 22a2, small screws 49 are screwed into the cleaning frame 13. The bearing member 22a is integrally provided with the flange 22a2 and a shaft 22a1. A tip side of the shaft 22a1 press-fitted in the hole portion 13a slides into the center hole of a flange 11b. This flange 11b is put in and fixed to one end of the photosensitive drum 11. When doing so, the rear end cover 19 is positioned through the shaft 22a1 protruding outside of the bearing member 22a, so that the rear end cover 19 is accurately positioned with respect to the photosensitive drum 11.

Also, a positioning portion 19b that is a dowel provided at a position that is separated from the photosensitive drum 11 as far as possible is fitted in a positioning portion 13b that is a hole provided on a side surface 13c of the cleaning frame 13. With this construction, the position of the rear end cover 19 in a rotational direction is determined about the center of the photosensitive drum 11. Then, the rear end cover 19 is fixed to the lengthwise side surface 13c of the cleaning frame 13.

[0032]

Further, the developer frame 16 is provided with cylindrical positioning portions 16a and 16b that protrude in the lengthwise direction from a lengthwise end surface 16d of the developer frame 16. Also, these positioning portions 16a and 16b are fitted in positioning portions 19c and 19d that are holes established in the rear end cover 19. With this construction, the developer frame 16 is positioned with respect to the rear end cover 19. Then, the developer frame 16 is fixed to the rear end cover 19. In a similar manner, the front end cover 20 that is the other end cover is positioned and fixed to the developer frame 16 and the cleaning frame 13. The developing frame 17 is positioned with a method to be described later. That is, the perimeter of a bearing member 22b press-fitted and fixed to the cleaning frame

13 is fitted in the hole portion 20a of the front end cover 20 and the bearing member 22b is allowed to partially protrude outward from the front end cover 20. Also, a bearing member 22 (22a, 22b) contributes to the positioning of the process cartridge 15 in the main body 27 of the image forming apparatus. That is, the bearing member 22 is a positioning portion of the process cartridge 15 and is a circular member.

[0033]

10 (Method of Fixing Frame)

The main cartridge frame comprises the cleaning frame 13, the developer frame 16, the developing frame 17, and the end covers 19 and 20.

[0034]

15 Prior to fixation of the cartridge frame, the cartridge frame is temporarily assembled. During this temporary assembling, the shaft 22a1 protruding from the cleaning frame 13 is fitted in a hole portion 19a of the rear end cover 19, the positioning portion (cylindrical dowel) 19b of the rear end cover 19 is fitted in the positioning hole 13b on the side surface of the cleaning frame 13, and the positioning portions 16a and 16b on the side surface of the developer frame 16 are fitted in the positioning portions (holes) 19c and 19d of the rear end cover. On the front end cover 20 side, in a similar manner, fitting between the front end cover 20 and the cleaning frame 13 and between the

front end cover 20 and the developer frame 16 is performed. It is possible to perform temporary assembling in this manner, so that it becomes easy to perform handling prior to real assembling (fixing).

5 [0035]

The fixation of the aforementioned rear end cover 19 to the cleaning frame 13 and the developer frame 16 is performed by putting small screws 28 through the positioning portions 19c and 19d and screwing the
10 screws into the positioning portions 16a and 16b. Also, the small screw 28 is put through a hole 19h of the rear end cover 19 and is screwed into a dowel 13e of the cleaning frame 13. Note that the positioning portions 19c and 19d and the hole 19h are each a
15 stepped hole whose outer side is a small hole. It is possible to put the small screws 28 through these small holes but the small holes are smaller than the positioning portions 16a and 16b and the dowel 13e. The combining and fixation of the cleaning frame 13 and
20 the developer frame 16 using the front end cover 20 are performed in a similar manner in which the combining and fixation of the cleaning frame 13 and the developer frame 16 using the rear end cover 19 are performed.

[0036]

25 Note that a resin bonding may be performed to combine the cleaning frame 13 with the developer frame 16 using the end covers 19 and 20. To perform this

resin bonding, resin flow paths are formed along bonding regions, in which the end covers 19 and 20 are bonded to the cleaning frame 13 and the developer frame 16. The bonding regions are formed when these
5 components are formed. Then, a flow path for injecting a resin is provided so as to reach from a gate of a fixture, which is different from a gate of a fixture used to form the end covers 19 and 20, to the formed resin flow paths, and a molten resin is injected and
10 solidified. In this case, the process cartridge 15 is temporarily assembled and contained in the fixture used for the resin bonding.

[0037]

To supply toner from the developer frame 16 to the
15 developing roller 18, a developer supplying opening portion 16c (see Fig. 2) and a developer receiving opening portion 17b are respectively provided for the developer frame 16 and the developing frame 17. The developing frame 17 is coupled to the developer frame
20 16 using a flexible seal 21 (see Fig. 7) functioning as a sealing member, so that the opening portions 17b and 16c are connected to each other. Also, the developer frame 16 is positioned with respect to the end covers 19 and 20 and the developing frame 17 is positioned
25 with respect to the cleaning frame 13. As a result, it is required that a space is maintained between the developing frame 17 and the developer frame 16 in view

of dimensional errors. Then, the cartridge 15 is positioned and mounted in the cartridge mounting portion of the apparatus body 27 on the cleaning frame 13 side.

5 [0038]

With this construction, even if the capacity of the developer container 16h is increased and the contained quantity of developer is increased in the cartridge 15, a load due to toner is placed on the end covers 19 and 20 and is not placed on the developing roller 18 supported by the developing frame 17. As a result, it becomes possible to obtain stable images without placing an additional load on the photosensitive drum 11.

15 [0039]

(Method of Attaching Flexible Seal to Developing Frame and Developer Frame)

This embodiment relates a construction in which a space between the developing device D and the developer frame 16 is sealed up. With this sealing construction, a flexible seal 21 having a folded shape is laminated as a sealing member. The flexible seal 21 is attached to the developer frame 16 through a place-shaped member 33 functioning as a connecting member. In this case, the flexible seal 21 has a thickness of 1 mm or less, although the thickness may be set to 1 mm or more by selecting a material that does not loses the

flexibility of the folded shape.

[0040]

Next, a method of attaching the flexible seal 21 will be described with reference to Figs. 10 and 11.

5 As shown in Fig. 10, the flexible seal 21 includes the first opening 21e and the second opening 21f. The areas of these openings 21f and 21e are approximately the same as those of a connecting member opening 33b of the plate-shaped member 33 and the developer receiving
10 opening portion 17b of the developing frame 17 or are the same as or larger than those of the opening 33b and the portion 17b.

[0041]

The flexible seal 21 is bonded to the plate-shaped
15 member 33 and the developing frame 17, with the first bonding portion 21k and the second bonding portion 21m having a closed shape (the diagonally shaded areas in Fig. 10) being placed around the rims of the connecting member opening 33b and the developer receiving opening
20 portion 17b. As a result, as shown in Fig. 11, the first opening 21e of the flexible seal 21 forms a single through hole with the developer receiving opening portion 17b of the developing frame 17, and the second opening 21f of the flexible seal 21 forms a
25 single through hole with the connecting member opening 33b of the plate-shaped member 33.

[0042]

In this embodiment, the flexible seal 21 is bonded to the developer frame 16, the developing frame 17, and the plate-shaped member 33 by performing thermal welding using a heat seal method, an impulse seal method, or the like. However, there may be alternatively used ultrasonic welding, a gluing agent, or an adhesive tape.

[0043]

Next, as shown in Fig. 11, after the flexible seal 21 is stuck onto the developing frame 17 and the plate-shaped member 33, the resulting member is bent in the direction indicated by the arrow so that the developer receiving opening portion 17b and the connecting member opening 33b are opposed to each other with the flexible seal 21 therebetween. In this manner, a folded shape (bag shape) is formed and end portions 21d (diagonally shaded portions) that are the outer rims of surfaces contacting each other after the bending are bonded to each other and are sealed. In this case, a gluing agent, an adhesive tape, ultrasonic welding, or thermal welding, such as a heat seal method or an impulse seal method, may be used as a sealing means.

[0044]

Next, the plate-shaped member 33 is attached to the developer frame 16. When doing so, however, a part of the plate-shaped member 33 is not welded or bonded in order to allow a developer seal 24 to pass

therebetween.

[0045]

In the embodiment, as shown in Fig. 7, there is obtained a construction in which a portion 33a is welded and an area, in which a toner sealing member 25 presses the developer seal 24, is not welded or bonded. Here, the portion 33a includes areas on both lengthwise sides and at one widthwise end of one surface of the plate-shaped member 33.

10 [0046]

With this construction, even if the distance between opposing surfaces of the developer frame 16 and the developing frame 17 varies, the flexible seal 21 functioning as a sealing member maintains the folded shape or the bag shape. As a result, it becomes possible to extremely reduce resistance that occurs during displacements. Also, by attaching the flexible seal 21 between the plate-shaped member 33 and the developing frame 17, it becomes possible to place the components so that the developer seal 24 is surrounded by the plate-shaped member 33. Also, it becomes possible to attach the toner sealing member 25 to the plate-shaped member 32 so that a space, through which the developer seal 24 passes, is sealed. As a result, there is prevented the leakage of toner.

[0047]

Further, when the sheet member and the developer

frame are sealed on the same plane, the plate-shaped member makes it possible to simplify the shape of a welding stand necessary for welding, in comparison with a case where the sheet member is directly laminated
5 onto the main body of the developer frame 16.

[0048]

Further, the plate-shaped member 33 makes it possible to integrate the sheet member with the developing frame 17 as a unit and to attach the sheet
10 member to the developer frame 16 without difficulty.

[0049]

Next, a method of attaching the flexible seal to the developing frame and the developer frame will be described.

15 [0050]

In the embodiment, the flexible seal 21 has a thickness of 0.1 mm or less. When the flexible seal 21 is used, a released paper is removed. This means that the flexible seal 21 is a monolayer sheet member. It
20 is possible to realize a flexible seal with lower rigidity by selecting a monolayer sheet member.

[0051]

As shown in Fig. 12, the flexible seal 21 in this embodiment is composed of a layer 21a having
25 flexibility and a released paper 21b that is more rigid than the layer 21a. The layer 21a is made of PET (polyethylene terephthalate), PP (polypropylene), ONY

(biaxial oriented nylon), a heat seal member, an ester base resin, ethylene-vinyl acetate (EVA), a polyurethane base resin, a polyester base resin, or an olefin base resin.

5 [0052]

Next, a method of forming the folded shape will be described.

[0053]

As shown in Fig. 12, orifice holes 31a used for
10 sheet member suction are established in an attachment and holding member 31. Also, these orifice holes 31a are communicated with an unillustrated vacuum pump apparatus. The layer 21a of this flexible seal 21 is vacuum-suctioned by the plurality of orifice holes 31a
15 and is held by the attachment and holding member 31, as shown in Fig. 13. Note that the surface of the attachment and holding member may be charged. In this case, the sheet member sticks to the attachment and holding member due to static electricity. After the
20 suction, the released paper 21b that is the second layer of the flexible seal 21 is peeled off and only the layer 21a (flexible seal 21) remains on the attachment and holding member 31, as shown in Fig. 14.

[0054]

25 As shown in Fig. 12, the attachment and holding member 31 is provided with heating elements 32 used for the impulse seal method. Next, as shown in Fig. 15,

after the flexible seal 21 held by the attachment and holding member 31 is pressed against the plate-shaped member 33 and the developing frame 17, current is instantaneously applied to the heating elements 32, which then generate heat. Following this, the heating elements 32 are immediately cooled. As a result, the flexible seal 21 is welded to the plate-shaped member 33 and the developing frame 17. Following this, the vacuum suction is stopped, the attachment and holding member 31 is lifted up and is separated from the flexible seal 21 welded to the developing frame 17 and the plate-shaped member 33. Note that the plate-shaped member 33 functions as a part of the developer frame 16. That is, the connecting member opening 33b of the plate-shaped member 33 is substantially an opening portion of the developer frame 16.

[0055]

Note that the welding of this flexible seal 21 to the plate-shaped member 33 and the developing frame 17 is performed so that this seal is bonded in areas having a closed shape in the vicinity of the connecting member opening 33b and the developer receiving opening portion 17b.

[0056]

Next, as shown in Fig. 11, after being stuck on the developing frame 17 and the plate-shaped member 33, the flexible seal 21 is bent in the direction indicated

by the arrow so that the first opening 21e and the second opening 21f are opposed to each other. In this manner, there is formed the folded shape (bag shape). Then, end portions 21d (diagonally shaded portions) of surfaces, which contact each other after the bending, are bonded to each other and sealed. One fold is formed for this folded shape. However, a plurality of folds may be formed to obtain an accordion-like folded shape.

10 [0057]

In this embodiment, an ester base seal film is used as the layer 21a of the sheet member. However, a hot-melt sheet, such as an EVA (ethylene-vinyl acetate copolymer) sheet, may be instead used.

15 [0058]

Also, in this embodiment, the flexible seal 21 is composed of the monolayer 21a, so that there is a danger that the flexible seal 21 is welded to heating areas in the case of a heat seal method with which heat is generated at all times. However, a desired attachment operation becomes possible by performing the welding with an impulse seal method with which it is possible to perform heating, cooling, and holding in a short time.

25 [0059]

Further, as another embodiment, there may be instead used an ultrasonic welding method with which

heat is instantaneously generated, a gluing agent that is not accompanied with heat generation, an adhesive tape, and the like.

[0060]

5 The assembling is performed in this manner, so that even if the flexible seal is very thin and therefore it is difficult to stick the flexible seal without creases, the shape of the flexible seal is stabilized by removing the released paper after
10 suction. Therefore, it becomes possible to perform welding at desired positions.

[0061]

 Also, as still another embodiment, even if a sheet member composed of a plurality of layers is used
15 instead of the aforementioned flexible seal, it is possible to apply the aforementioned attachment method.

[0062]

 Next, the plate-shaped member 33 is attached to the developer frame 16. When doing so, a part of an
20 attachment portion is not welded or bonded in order to allow the developer seal 24 to pass therebetween.

[0063]

 In the embodiment, as shown in Fig. 7, there is obtained a construction in which the portion 33a is
25 welded and an area, in which the toner sealing member 25 presses the developer seal 24, is not welded or bonded.

[0064]

Here, the toner sealing member 25 is an elastic member, such as felt, and is provided at one lengthwise end of the plate-shaped member 33 so that the toner
5 sealing member 25 is long and narrow in the widthwise direction. A concave portion 33c is established on a plate surface of the plate-shaped member 33 and the toner sealing member 25 is stuck on the bottom surface of the concave portion 33c (see Fig. 8).

10 [0065]

With this construction, even if the distance between opposing surfaces of the developer frame 16 and the developing frame 17 varies, the flexible seal 21 maintains the folded shape or the bag shape. Also, the
15 flexible seal 21 is composed of a thin flexible seat, so that it becomes possible to extremely reduce resistance occurring during displacements of the developing frame 17.

[0066]

20 (Another Embodiment of Seal Member Sealing between Developing Frame and Toner Container Frame)

Fig. 16 is a disassembled perspective view illustrating another embodiment of this seal member. In Fig. 16, Fig. 7 is simplified and a seal member
25 differing from that shown in Fig. 7 is illustrated.

[0067]

Fig. 17 is a vertical cross-sectional view of the

process cartridge.

[0068]

A sheet member 21i is made of synthetic resin foam that is a flexible material, such as urethane foam, low
5 hardness rubber, or silicon. The sheet member 21i has a plate shape and includes an opening portion 21j. When the sheet member 21i is attached, this opening portion 21j coincides with each of the developer receiving opening portion 17b of the developing frame
10 17 and the developer supplying opening portion 16c of the developer frame 16. The opening portion 21j of the sheet member 21i is approximately equal to the opening portions 17b and 16c. The sheet member 21i is stuck on at least one of the opposing surfaces of the developing
15 frame 17 and the developer frame 16. Note that the sheet member 21i is not stuck to the developer frame 16 in an area through which the developer seal 24 is pulled to the outside.

[0069]

20 Under an assembled condition, the thickness of this sheet member 21i is greater than a distance between an opposing surface 17g, which opposes the developer frame 16 and exists around the developer receiving opening portion 17b of the developing frame
25 17, and an opposing surface 16f, which opposes the opposing surface 17g and exists around the developer supplying opening portion 16c of the developer frame

16.

[0070]

Accordingly, in the cartridge 15 assembled in the manner shown in Fig. 17, the sheet member 21i is
5 pinched by the opposing surface 17g of the developing frame 17 and the opposing surface 16f of the developer frame 16. The reaction force generated by the pinching of this sheet member 21i acts as a pressurizing force with which a spacer roller 18b of the developing roller
10 18 is pressed against the photosensitive drum 11.

Therefore, it is preferable that the spring force of the sheet member 21i is reduced as small as possible.

[0071]

With this sheet member 21i, it becomes possible to
15 eliminate the plate-shaped member 33 described in the aforementioned embodiment and therefore it becomes easy to assemble the components.

[0072]

(Developer Seal)

20 After the developer supplying opening portion 16c of the developer frame 16 is sealed, the developer seal 24 is bent so as to overlap the sealed part, thereby obtaining a part of the developer seal 24 that protrude to the outside on a side opposite to the bending
25 position, as shown in Fig. 7. Before the developer seal 24 is attached, the agitating member 113, 114, and 123 are mounted. After the developer seal is attached,

toner is loaded into the developer frame 16 through a toner loading opening 16g. After the toner loading, a toner cap 37 is press-fitted in the toner loading opening 16g and is fixed therein.

5 [0073]

To summarize the description of the seal member, the developing frame 17 and the developer frame 16 are combined with each other by the flexible seal 21. Also, the flexible seal 21 is stuck onto the developing
10 frame 17 and the plate-shaped member 33.

[0074]

The flexible seal 21 has a first opening 21f and a second 21e as through holes. One of the through holes opposes the developer supplying opening portion 16c
15 established in the developer frame 16 through the connecting member opening 33b of the plate-shaped member 33. Also, the other of the through holes opposes the developer receiving opening portion 17b established in the developing frame 17. Here, the
20 developer supplying opening portion 16c is used to supply toner contained in the developer container 16h of the developer frame 16 toward a position at which the developing roller 18 that is a developing member is provided. Also, the developer receiving opening
25 portion 17b is used to receive toner passing through the developer supplying opening portion 16c. Further, an area surrounding one of the through openings of the

flexible seal member 21 is stuck onto the plate-shaped member 33. Also, an area surrounding the other of the through openings is stuck onto the developer frame 17. Here, the first opening 21e that is the one of the
5 through holes opposes the developer receiving opening portion 17b of the developing frame 17, while the second opening 21f that is the other of the through holes opposes the developer supplying opening portion 16c of the developer frame 16 through the connecting
10 member opening 33b of the plate-shaped member 33.
[0075]

The flexible seal 21 has a bag shape. The first opening 21f and the second opening 21e are respectively provided on one surface and the other surface of the
15 bag that face each other. The first opening 21f provided on the one surface opposes the developer supplying opening portion 16c provided for the developer frame 16 through the connecting member opening 33b of the plate-shaped member 33. Also, the
20 second opening 21e provided on the other surface opposes the developer receiving opening portion 17b provided for the developing frame 17. Here, the developer supplying opening portion 16b is used to supply the toner contained in the developer frame 16
25 having the developer container 16h toward a position at which the developing roller 18 is provided. Also, the developer receiving opening portion 17b is used to

receive the toner passing through the developer
supplying opening portion 16c. The area surrounding
the first opening 21f provided on the one surface of
the flexible seal 21 is stuck onto the plate-shaped
5 member 33 provided as a part of the developer frame 16.
Also, the area surrounding the second opening 21e
provided on the other surface is stuck on the
developing frame 17.

[0076]

10 The flexible seal 21 has at least one fold between
the surfaces stuck onto the developing frame 17 and the
developer frame 16. Also, the flexible seal 21 has a
folded shape where one end is stuck onto the plate-
shaped member 33 provided as a part of the developer
15 frame 16 and the other end is stuck onto the developing
frame 17.

[0077]

The flexible seal 21 is formed using an elastic
member or a heat seal member.

20 [0078]

In contrast to the aforementioned embodiment, the
material of the flat-shaped flexible sheet member 21i
of the other embodiment of the flexible seal is
urethane foam, low hardness rubber, silicon, or the
25 like.

[0079]

(Construction of Developing Device)

A tension coil spring 36 is provided with tension between the developing frame 17 and the cleaning frame (also called drum frame) 13. In this example, this construction is further developed.

5 [0080]

Next, the construction of the developing device will be described with reference to Figs. 18 and 19. Fig. 18 is a perspective view showing a state before each component of the developing device is assembled, while Fig. 19 is a perspective view showing a state after each component of the developing device is assembled. In the developing frame 17, there are assembled the developing roller 18, the developing blade 26, and the like as construction elements related to image formation. Note that the description in this embodiment is limited to the front end cover 20 side that is the other side. The rear end cover 19 side that is the one side has the same construction. However, on the rear end cover 19 side, a sheet metal 26a does not protrude outside of the developing frame 17.

[0081]

The developing blade 26 is obtained by fixing urethane rubber 26b to the sheet metal 26a having a thickness of around 1 to 2 mm using a hot melt sheet, a double-faced adhesive tape, or the like. This urethane rubber 26b contacts the generatrix of the developing

roller 18, thereby regulating the amount of toner on the perimeter of the developing roller 18. The sheet metal 26a is a fixing member that integrally includes the urethane rubber 26b and is fixed to the developing frame 17. Also, the sheet metal 26a is a metal plate. The metal plate may be replaced with another material so long as the material has conductivity. Note that there is a case where silicon rubber is used as the developing blade 26. As shown in Fig. 18, an internal thread 17i is formed in a blade stand plane 17h that is provided for the developing frame 17 and functions as a blade attachment member. Also, a positioning dowel (not shown) is provided at an approximately center position. The dowel (not shown) of the developing frame 17 is fitted in a fitting hole 26d provided for the sheet metal 26a. Then, a small screw 68 is put through a screw hole 26c formed in the sheet metal 26a and is screwed into the internal thread 17i, thereby fixing the sheet metal 26a to the plane 17h. In this manner, the tip of the urethane rubber 26b is positioned, the abutting pressure given by the urethane rubber 26b to the developing roller 18 is determined, the distance from the tip of the urethane rubber 26b to the position, at which the urethane rubber 26b is made to abut against the developing frame 17, is determined, and developing conditions are determined. Also, one end of the sheet metal 26a of the developing blade 26

is formed as a bent portion 26e that is bent into an approximately 90° angle. With this construction, the hardness of the sheet metal is increased, so that the urethane rubber 26b is made to evenly abut against the developing roller 18 in the lengthwise direction. Also, the length of the sheet metal 26a is determined so that the end portions thereof protrude from the developing frame 17. In the protruding portions, there are formed attachment holes 26f to which pressuring springs to be described later are attached.

[0082]

It should be noted here that an elastic seal member 61, such as Moltopren having an approximately U-shape, is stuck on the developing frame 17 along the upper lengthwise direction (a first straight line portion 17n) and the widthwise direction (a second straight line portion 17p) of the developer receiving opening portion 17b. In this manner, there is prevented the leakage of toner to the outside. A first straight line portion 61c and a second straight line portion 61a of the elastic seal member 61 are brought into contact with the first straight line portion 17n and the second straight line portion 17p of the developing frame 17 and are stuck thereto. This elastic seal member 61 is pinched between the developing frame 17 and the developing blade 26 to be depressed, thereby preventing the leakage of toner to

the outside. Further, this elastic seal member 61 includes an ear portion 61b protruding from a lengthwise end portion by several millimeters. This ear portion 61b is used to position a magnetic seal
5 that is not shown in the drawing.

[0083]

Also, a magnetic seal (not shown) is attached to a groove 17k provided between both lengthwise ends of the developer receiving opening portion 17b along a
10 circular arc surface 17l that extends along the developing roller 18. With the magnetic force, there is prevented the leakage of toner from the developing roller 18.

[0084]

15 Further, a thin elastic seal member (not shown) that contacts the generatrix of the developing roller 18 is stuck onto a lower jaw portion 17m.

[0085]

The developing roller 18 is a cylindrical member
20 made of a metallic material, such as aluminum or a stainless steel. The outside diameter thereof is around 16 to 20 mm and the material thickness thereof is around 0.5 to 1 mm. Also, in order to increase the chargeability of developer, the surface thereof is
25 subjected to carbon coating, blasting, or the like. In this embodiment, only the carbon coating is performed.

[0086]

Also, sleeve flanges 18a that are stepped cylindrical members made of a metallic material, such as aluminum or a stainless steel, are press-fitted in both end portions of the developing roller 18 (only one end portion is illustrated). Each sleeve flange 18a is coaxial with the developing roller 18 and is provided with a first cylindrical portion 18d having a large outside diameter and a second cylindrical portion 18c having a diameter that is smaller than that of the first cylindrical portion 18d. This first cylindrical portion 18d is provided with the ring-shaped distance regulating member (called the "spacer roller") 18b that regulates the opposing distance (hereinafter, the "SD gap") between the developing roller 18 and the photosensitive drum 11. This spacer roller 18b is made of an insulating material, such as polyacetal. The outside diameter of this spacer roller 18b is larger than the diameter of the developing roller 18, with the difference between them being equal to twofold of the SD gap. Also, the second cylindrical portion 18c is provided with a developing bearing 63 for rotatably supporting the developing roller 18 and positioning on the developing frame 17 (Fig. 20 is an especially magnified perspective view taken from the opposite side). Also, a two-surface width portion 18e is formed at the tip of the second cylindrical portion 18c and a developing roller gear 62 made of a synthetic resin is

unrotatably fitted around this cylindrical portion 18c. This developing roller gear 62 receives a driving force from a helical drum gear (not shown) provided in an end portion of the photosensitive drum 11 and rotatably
5 drives the developing roller 18. Also, a thrust in the axial direction thereof is twisted and is directed toward the center portion of the developing roller 18. Also, a roller-shaped magnet (not shown in Fig. 18, to be described later) for having toner adhere on the
10 peripheral surface of the developing roller 18 is contained in the developing roller 18.

[0087]

The developing bearing 63 is composed of a member made of a resin having an improved sliding property and
15 has a flat shape with a thickness of around 2 to 5 mm. A cylindrical bearing portion 63a is formed at approximately the center of a plane portion 63g. The bearing portion 63a has an inside diameter of 8 to 15 mm. This bearing portion 63a is fitted around the
20 second cylindrical portion 18c of the sleeve flange 18a to allow the developing roller 18 to rotatably slide. Also, on the plane portion 63g, dowels 63c, 63d, and 63e used for positioning on the developing frame 17 are formed substantially parallel to the bearing portion
25 63a. With this construction, positioning on the developing frame 17 is performed. Among these dowels, the dowels 63d and 63e that are coaxial with the dowel

63c and exist at the tip of the dowel 63c are used to position a magnetic seal. Also, on the plane portion 63g, there is established screw holes 63b for fixing the developing bearing 63 to the developing frame 17 using small screws 64 or the like. The dowel 63c of the developing bearing 63 is fitted in an unillustrated fitting hole on one lengthwise end surface of the developing frame 17. Also, the dowel 63f is fitted in an unillustrated fitting long hole and the plane portion 63g of the developing bearing 63 contacts the aforementioned end surface of the developing frame 17. Then, the small screws 64 are put through the screw holes 63b established in the developing bearing 63 and are screwed into internal threads established in the aforementioned end surface of the developing frame 17. Thus, the developing bearing 63 is fixed to the developing frame 17. As a result, the developing blade 26 and the developing roller 18, which are fixed to the developing frame 17, are positioned with reliability and therefore stable images are outputted.

[0088]

In some cases, a relatively high-priced material having a superior sliding characteristic is used to form the bearing portion 63a of the developing bearing 63 that has been described above, thereby allowing the sleeve flange 18a of the developing roller 18 to rotatably slide (for instance, a bearing member made of

a polyphenylene sulfide PPS base material or a polyamide PA base material is used). Therefore, if only a sliding portion is separated from a housing as a bearing bush, it becomes possible to reduce the volume of the component made of a high-priced material and to form the housing using a relative-low-priced material, such as high impact polystyrene HIPS.

[0089]

Also, a magnet (not shown) for having toner adhere on the peripheral surface of the developing roller 18 is provided inside of the developing roller 18.

[0090]

The driving side of the developing roller has been described above. The non-driving side thereof will be described later.

[0091]

(Construction for Supporting Developing Device)

Next, the construction for supporting the developing device will be described with reference to Figs. 7, 20, 21, 22, and 23. Fig. 20 is a perspective view (on the driving side) showing a state before the developing device is supported by the cleaning frame 13. Fig. 21 is a perspective view (on the driving side) showing a state after the developing device is supported by the cleaning frame 13. Fig. 22 is a side view showing a state where Fig. 4 is partially enlarged and the end cover is removed. Fig. 23 is a perspective

view showing a state before the developing frame and the end cover on the non-driving side are assembled.
[0092]

As described above, in order to output optimal
5 images, it is required that the developing roller 18 and the photosensitive drum 11 maintain an optimal SD gap (a space between the photosensitive drum 11 and the developing roller 18). To do so, in this embodiment, the developing roller 18 is pressed against the
10 photosensitive drum 11 with an optimal pressurizing force (hereinafter referred to as the "D pressurizing"), thereby maintaining the SD gap (see Fig. 2). In this case, the optimal D pressurizing is in a range of about 500 g to 2000 g on each of the
15 driving side and the non-driving side. In the case of the D pressurizing below this range, the SD gap is widened due to vibrations and the like, which leads to image defects like blank areas. In the case of the D pressurizing above this range, the spacer roller 18b is
20 depressed by the D pressurizing (pressurizing force between the spacer roller 18b and the photosensitive drum 11), which leads to a state where the SD gap is narrowed. Also, loads are placed on the inner radius and the perimeter of the spacer roller 18b due to the D
25 pressurizing, so that there occur shaving and the like due to wear. As a result, there is a danger that an optimal SD gap cannot be maintained. In this

embodiment, a stable SD gap is maintained with the construction to be described below. The supporting of the developing device (method of maintaining the SD gap) on each of the driving side and the non-driving side will be described below.

[0093]

As shown in Figs. 20, 21, and 22, on the driving side, the developing frame 17 (developing device including the developing roller, the developing blade, and the like) is disposed so that a suspending hole 17d established in the tip of an arm portion 17c of the developing frame 17 is placed coaxially with a supporting hole 13e of the cleaning frame 13. Then, a parallel pin 66 is put through both of the suspending hole 17d and the supporting hole 13e, and thus functions as the rotational center of sliding. In this manner, the developing frame 17 is slidably supported so that the center of the developing roller is directed toward the center of the photosensitive drum. Under this condition, as shown in Fig. 22, the pressurizing force given by the developing roller 18 to the photosensitive drum 11 on the driving side is generated by three forces: a mesh force F1 of a gear portion 11a1 arranged on the flange 11a of the photosensitive drum 11 and a gear portion 62b of the developing roller gear 62 (gear loads on a line of action passing through a mesh pitch point), a spring force F2 generated by an

extension coil spring 36 hooked between the cleaning frame 13 and the developing device, and a self weight F3 of the developing device passing through the center of gravity of the developing device. That is, in Fig. 22, all of the three forces are set so that a moment is generated in a counterclockwise direction about the parallel pin (rocking center) 66 and the developing roller 18 is pressurized against the photosensitive drum 11. During this setting, the position of the rocking center is set so that a small angle of around 5° is formed between the mesh force F1 and a line connecting a point, at which the photosensitive drum 11 contacts the spacer roller 18b, and the rocking center (66). This setting prevents a situation where variation of the mesh force F1 due to variation of a torque significantly changes the D pressurizing. Also, the self weight F3 remains stable because there is obtained a construction in which a load due to developer is not placed on the developing device D, as described above. Also, as will be described later, the spring force F2 is also disposed and supported without losses, so that the D pressurizing D1 on the driving side takes a stable numerical value.

[0094]

That is, as shown in Fig. 20, the extension coil spring 36 provided as an biasing member functions as an extension spring whose wire diameter is around 0.5 to 1

mm. Both the end portions thereof are provided with hook portions 36a and 36b that function as attachment portions to the device. Also, the extension coil spring 36 is made of a material having spring property, such as SUS, a piano wire, or phosphor bronze. The hook portion 36a on one end of this spring member is hooked on a hole portion 26g formed in a sheet metal 26a of the developing blade 26, while the hook portion 36b on the other end is hooked on a shaft-shaped spring peg 13d provided for the cleaning frame 13. Here, one end portion of the sheet metal 26a protrudes from the end surface on one end of the developing frame 17. Also, the hole portion 26g of the developing blade 26 is disposed at a position protruding outward from the developing frame 17, has a width of around 2 to 5 mm, and has a length of around 4 to 8 mm. Also, the spring peg 13d of the cleaning frame 13 is disposed in the vicinity of the photosensitive drum 11, has a diameter of around 2 to 5 mm, and is integrated with the cleaning frame 13. Also, the positions of both the hole portion 26g and the spring peg 13d are set so that there is formed a substantially right angle between a line connecting the hole portion 26g of the blade sheet metal 26a to the spring peg 13d of the cleaning frame 13 and a line connecting the hole portion 26g to the rocking center (66). Also, the extension coil spring 36 is hooked on the developing blade 26. As a result,

as to only the developing frame 17, it is not required to provide spring attachment portions, such as an axis, that protrude from the frame. This makes it possible to simplify the form of the lengthwise end surface of the developing frame 17. Also, it becomes easy to install attachment jigs and assembling easiness is improved when the aforementioned flexible seal 21 is attached to the developing frame 17. Also, the extension coil spring 36 is attached to the developing blade 26, which means that this spring is attached to a metal having a high elastic modulus. Therefore, situations that lead to losses of the D pressurizing (for instance, a situation where the spring peg portion is deformed due to a spring force) are prevented. Also, in the case where attachment portions, such as dowels, are directly provided for the developing frame 17, it is required to increase a size in order to prevent losses of the D pressurizing due to deformation. However, no dowels are provided, so that there is achieved space saving.

[0095]

It should be noted here that there are cases where a detection means is provided to detect the residual quantity of developer. Various methods may be used to achieve the detection means. For instance, there may be used a method with which the residual quantity of developer is measured by measuring the electrostatic

capacity between the developing roller and an antenna member disposed in the vicinity of the developing roller. In this case, it is required that the sheet plate of the developing blade that is a conductive member has the same potential as the developing roller. A voltage application path will be described. As shown in Fig. 7, a contact sheet metal 58 is supported by the end cover 20. Electricity is supplied to an outer contact portion 58a of this contact sheet metal 58 from an unillustrated contact portion of the apparatus main body. A surface of the outer contact 58a which contacts the contact portion of the main body is exposed on the center undersurface of the end cover 20. Further, a contact portion 58b of the contact sheet metal 58 is electrically connected to a contact axis 20f supported by the end cover 20 by insert formation or the like. Then, the tip of the contact axis 20f is inserted into an inner radius portion 18g of the developing roller shown in Fig. 20 and is electrically connected to an unillustrated contact portion supported by the developing roller. With this construction, a voltage is applied to the developing roller 18. Also, at the same time, the contact sheet metal 58 includes a plate spring portion 58c and this plate spring portion 58c contacts the tip portion of a straight line portion 36c of the illustrated extension coil spring 36 functioning as an biasing member. As described above,

this spring 36 is made of a metal and the hook portion 36a contacts the sheet metal 26a of the developing blade 26. This makes it possible to supply a high voltage and to obtain a potential that is the same as a potential of the developing roller 18. In more detail, electric supply is performed using a member on which the spring 36 pressurizing the developing roller 18 against the photosensitive drum 11 acts. This means that the same component is given two functions of developer regulation and electric supply. With this construction, the number of parts is reduced, so that it becomes possible to achieve cost reduction and space saving.

[0096]

As described above, the pressurizing spring that pressurizes the developing roller against the photosensitive drum is attached to the attachment portion provided for the sheet metal of the developing blade. Therefore, it becomes possible to perform the pressurizing action between the photosensitive drum and the developing roller without causing losses due to the deformation of frames. Consequently, a predetermined pressurizing force is uniformly generated and the space between the photosensitive drum and the developing roller remains constant. As a result, it becomes possible to obtain stable images.

[0097]

Also, the pressurizing spring doubles as an electric supplying member to the developing blade sheet metal. This reduces the number of parts and therefore there are achieved cost reduction and space saving.

5 Also, the developing blade sheet metal functions as a spring peg for the pressurizing spring, so that a situation is prevented in which the pressurizing spring is hooked on a frame made of a resin and spring peg portions are deformed.

10 [0098]

Further, as shown in Fig. 23, on the non-driving side of the developing frame 17, there is obtained a construction in which an engagement member 17e is formed as a protruding portion on a lengthwise center axial line of the developing roller 18 and the engagement member 17e is pressurized toward the center of the photosensitive drum 11. This engagement member 17e integrally includes a non-driving-side bearing member that supports the developing roller 18.

20 [0099]

Next, the construction of the D pressurizing on the non-driving side will be described. As shown in Figs. 7 and 23, on the non-driving side of the developing frame 17, the engagement member 17e is fixed on the lengthwise center axial line of the developing roller 18. Then, there is obtained a construction in which the engagement member 17e is pressurized toward

the photosensitive drum 11. The engagement member 17e is fixed to the developing frame 17 using small screws 41. As shown in Fig. 23, the engagement member 17e is inserted into a groove 19e provided for the rear end cover 19 (in this embodiment, an elongated hole having a straight line shape that is substantially parallel to a direction toward the center of the photosensitive drum) and is constructed so as to be movable toward the center of the photosensitive drum. Also, within the groove 19e, an elastic member 67 is disposed on an opposite side to the photosensitive drum 11 so that the engagement member 17e is sandwiched therebetween. This elastic member 67 pressurizes the engagement member 17e through a pressing member 67a. The elastic member 67 is a coil-shaped compression spring whose wire diameter is around 0.5 to 1 mm. The spring force of the spring directly functions as a pressurizing force D2 given by the developing roller 18 to the photosensitive drum 11 on the non-driving side. This means that the pressurizing force D2 is determined only by the spring force and therefore a stable pressurizing force is obtainable. The groove 19e also plays a role in positioning the developing roller 18 by regulating the moving direction thereof. This groove 19e is a concave portion when viewed from the inside of the rear end cover 19 and the width of this groove 19e on the outer side is narrow, thereby preventing the pressing member

67a from going out of the groove 19e.

[0100]

A flat surface 67b of the pressing member 67a
contacts the elastic member 67. The flat surface 67b
5 is perpendicular to the pressurizing direction of the
elastic member 67. A flat surface that is parallel to
the flat surface 67b is formed on a side of the
pressing member 67a opposite to the flat surface 67b
and contacts a flat portion 17e1 of the engagement
10 member 17e. This flat portion 17e1 is a pressed
portion that is pressed by the elastic member 67.

[0101]

(Description of Coupling Member)

Here, coupling shapes will be described with
15 reference to Figs. 24 to 26.

[0102]

In Fig. 24, the first coupling 105a that is a
driving force receiving member of the process cartridge
15 includes a substantially triangular convex portion
105a1. In more detail, this convex portion 105a1 is a
20 triangle prism that is twisted in the rotational
direction of an axis. Also, a main body first coupling
103 that is a driving force transmitting member of the
apparatus main body includes a concave portion 103a
25 that is engaged with the convex portion 105a1 and has a
substantially triangular cross section that is twisted
in the axial direction. With this construction, when

the first coupling 105a and the main body first coupling 103 are engaged with each other and are rotated, each vertex of the convex portion 105a1 is made to evenly abut against the inside surface of the concave portion 103a, so that matching is established between the axial centers and a driving force is transmitted.

[0103]

As described above, the first coupling 105a and the main body first coupling 103 are respectively a convex portion and a concave portion of a twisted triangle prism. When these couplings are engaged and rotated, a thrust in the axial direction is generated and the couplings pull each other.

[0104]

In Figs. 25 and 26, a main body second coupling 104 of the image forming apparatus includes a two-surface width portion formed by shaving two surfaces of a cylinder and includes abutment portions 104a and 104b. One pair of the abutment portions 104a and 104b exists on each surface of the two-surface width portion, with the abutment portion 104a being arranged on one side of the surface and the abutment portion 104b being arranged on the other side of the surface. Also, each surface of the two-surface width portion on one side includes one of the abutment portions 104a and 104b. The second coupling 106a within the process

cartridge 15 has a construction in which triangular ribs are provided for a circular concave portion 106d at two positions by equally dividing the circumference of a circle. These triangular ribs each include flat abutment portions 106e and 106f arranged perpendicular to each other.

[0105]

Then, as shown in Fig. 25, when the main body second coupling 104 is rotated through an unillustrated toner seal automatic unsealing mechanism in the direction E in which the developer seal 24 is unsealed, the triangular rib abutment portions 106e of the second coupling 106a are made to abut against the abutment portions 104a of the main body second coupling 104, thereby transmitting a driving force.

[0106]

At this time, there is also obtained a shape in which the diameter of the circular concave portion 106 is changed so that a space g1 in the diameter direction between the perimeter 104d of the main body second coupling 104 and the concave portion 106d of the second coupling 106a becomes small. Therefore, the concave portion 106d includes flat surfaces 106g that each extends substantially parallel to a surface 106f from a point midway through a circular arc.

[0107]

It should be noted here that the perimeter 104d of

the main body second coupling 104 is a circular arc and exists on a circle whose center coincides with the rotational center of the main body second coupling 104. Also, there is obtained a construction described below.

5 After the driving for unsealing the developer seal 24 is finished, the main body second coupling 104 is rotated backward in the I direction, as shown in Fig. 26. As a result, the abutment portion 106f of the second coupling 106a is made to abut against the
10 abutment portion 104b of the main body second coupling 104, the second coupling 106a is driven, and a driving force is transmitted to the toner agitating members 113, 114, and 123 and the like. There is also obtained a construction in which during this operation, a space
15 g2 is maintained between the main body second coupling 104 and the second coupling 106a in a radius direction with respect to the rotational axis. In this embodiment, the space g2 is set at around 2 mm.

[0108]

20 With this construction, it becomes possible that the rotational center is determined between the main body second coupling 104 and the second coupling 106a without rotationally driving the photosensitive drum 11 when the developer seal 24 is unsealed. Also, after
25 the developer seal 24 is unsealed, that is, when an image is formed, the first coupling 105a provided for the photosensitive drum 11 and the main body first

coupling 103 function as the rotational center, and the second coupling 106a and the main body second coupling 104 for transmitting a driving force to the toner agitating members 113, 114, and 123 and the like
5 transmit the driving force. When doing so, even if these coupling 106a and 104 are eccentrically positioned, alignment is not performed and the driving force is transmitted under the eccentric condition. This achieves a construction in which the matching
10 between the axial centers of the main body first coupling 103 and the first coupling 105a is not hindered.

[0109]

(Description of Driving System)

15 Fig. 27 is a system diagram of the driving system in this embodiment. Note that reference symbols used in this system diagram are used as reference symbols assigned specifically for the system diagram and a developing sleeve gear 107b corresponds to the
20 developing roller gear 62 (see Figs. 7 and 20) in a concrete construction.

[0110]

Under a condition where the process cartridge 15 is set in the apparatus main body 27, driving sources
25 101 and 102 for the process cartridge 15, such as motors, provided on the apparatus main body 27 side are coupled to the couplings 105a and 106a that integrally

rotate with input gears 105b and 106b on the process cartridge side through the couplings 103 and 104. The coupling 106a is supported by a bearing 20e. The coupling 105a and the gear 105b are formed as one
5 component or are integrally formed to obtain a gear flange 105, and are supported by the cleaning frame 13 through a bearing member 22b. Also, for instance, in a construction in which the driving source 102 uses a motor that is different from that of the drum driving
10 source 101 and the rotational speeds of the motors can be changed with a control device 121, it becomes possible to change the driving speed of a toner agitating system in synchronism with the coupling 104 and the input coupling 106a on the process cartridge
15 side.

[0111]

The control device 121 makes it possible to turn ON/OFF the driving of the driving source 102 or to change a driving speed in accordance with conditions,
20 such as the number of sheets to be processed by the process cartridge 15, the toner quantity in the process cartridge 15, and an agitating driving torque of the process cartridge 15.

[0112]

25 Also, in the apparatus main body 27 whose printing speed is high, setting is made by changing the driving speed of the driving source 102. Thus, there is

obtained a construction in which the agitating speed is not changed and remains constant even if the speeds of the photosensitive drum 11 and the developing roller 18 are accelerated. Here, the driving source 102 may use
5 the same driving motor as the driving source 101 through a variable speed device. In this case, it is possible to set optimal agitating motion by changing a speed in accordance with specifications of the apparatus main body 27.

10 [0113]

The driving system on the process cartridge side will be described.

[0114]

Gear flanges 105 and 107 that are obtained by
15 integrally forming gears 105b and 107b with flanges are respectively fixed to one ends of the photosensitive drum 11 and the developing roller 18 that are directly related to the development of electrostatic latent images. Also, bearing flanges 119 and 120 are fixed to
20 the other ends thereof. In this manner, units are formed from these components. The gear 105b meshes with the sleeve gear 107b.

[0115]

When the coupling 103 is rotated by the driving
25 source 101 on the apparatus main body 27 side, the photosensitive drum 11 and the developing roller 18 are rotated. The photosensitive drum unit is rotatably

supported by bearing members 22a and 22b. Also, as to the developing roller 18, the spacer roller 18b having the same center as the developing roller 18 but having a larger outside diameter than the developing roller 18 is brought into pressure contact with the photosensitive drum 11. As a result, the developing roller 18 rotates while maintaining an optimal gap with the surface of the photosensitive drum 11. The bearing members 22a and 22b are holes that are directly established in the cleaning frame 13 of the process cartridge 15 or members fixed to this frame (see Fig. 7). Journal portions of the flanges 105 and 119 are fitted in the bearing members 22a and 22b.

[0116]

To drive the agitating system, gears are coupled so that a driving force is transmitted to the agitating members 113 and 114 as follows. First, the driving force is transmitted to an idler gear 108 through an idler gear 126 that meshes with an input gear 106b. Then, the driving force is transmitted to an idler gear 129 fixed to a shaft 108a fixed to the idler gear 108, and is further transmitted to an idler gear 128 that meshes with the idler gear 129. Finally, the driving force is transmitted to agitating gears 109 and 127 that mesh with a small gear 128a of the idler gear 128 that is a two-stepped gear. Note that there is no problem even if the axis of the input gear 106b and the

axis of the agitating member 114 do not exist on a straight line, so that it is possible to select the position of the input gear 106b in a wide area. Here, each gear in the process cartridge 15 is rotatably supported by the frame of the process cartridge 15.
5 [0117]

Also, the shaft 108a of the idler gear 108 is integrated with a driving transmission rod 122 or is coupled thereto on a straight line. The driving transmission rod 122 is coupled to an idler gear 124 on the lengthwise opposite side and transmits the driving force to the agitating member 123 through an agitating gear 125 that meshes with an idler gear 110a. Here, each of the driving transmission rod 122 and the agitating members 113, 114, and 123 are rotatably supported by the developer frame 16.
10
15 [0118]

Consequently, when the input gear 106b is rotated, the agitating members 114, 113, and 123 and the transmission rod 122 rotate in an interlock manner because the journal portion of each of these components is rotatably supported by a bearing portion provided for the developer frame 16.
20 [0119]

As to the coupling 103, as shown in Fig. 24, the convex portion 105a1 that is a twisted triangle prism on the drum flange 105 side is engaged with the twisted
25

concave portion 103a on the apparatus main body 27 side during driving. Therefore, the convex portion 105a1 and the concave portion 103a pull each other and are aligned, which determines the positions of the apparatus main body 27 and the process cartridge 15. During this operation, the convex portion of the coupling 104 is engaged with the concave portion of the input coupling 106a. However, a fitting space is maintained to allow eccentricity to a degree, so that there is no effect on the positioning of the first coupling 105a on the drum flange side (see Figs. 25 and 26). Further, as a detent means of the process cartridge 15, a protrusion (to be described later) of the second guide portion 20g of the front end cover 20 is positioned in the apparatus main body 27. That is, there is obtained a rough coupling construction described below. On the driving input side on which there are performed development and formation of latent images that affect images, positioning in the apparatus main body 27 is performed by an aligning action of the couplings. However, on the driving input side of the agitating system, only the transmission of a driving force is performed.

[0120]

Further, in the cleaning frame 13 that also functions as the removed toner reservoir 5, there is contained an impeller-shaped removed toner sending

member 115 that transports removed toner removed from the photosensitive drum 11. This removed toner sending member 115 is rotatably pivoted by bearing portions provided for the cleaning frame 13. A removed toner sending portion input gear 112 is fixed to one end of the removed toner sending member 115. This removed toner sending gear 112 meshes with the gear 124 through idler gears 111c, 111b, 111a, 125, and 110a. As to the transmission rod 122, the input gear 108 is fixed to one end thereof and the output gear 124 is fixed to the non-driving side that is the opposite side. The axis of each of the idler gears 111a, 111b, and 111c is rotatably supported by bearing portions of the rear end cover 19. Here, when the driving transmission rod 122 rotates, the removed toner sending member 115 also rotates in an interlock manner. Note that each bearing portion supporting the idler gears 111a, 111b, and 111c is a fixation axis that is integrally formed with the rear end cover 19.

[0121]

Also, the idler gear 111c may be a two-stepped step gear. In this case, a large gear meshes with the idler gear 111b and a small gear meshes with the removed toner sending gear 112.

[0122]

As described above, each moving portion in the process cartridge 15 is constructed so that a driving

train including the photosensitive drum 11 and the developing roller 18 and a driving train for agitating toner and sending removed toner are separately driven by the driving sources on the apparatus main body 27 side.

[0123]

Also, the removed toner sending member 115 may be driven by a transmission construction on an opposite side to the input portion of the agitating member 113 or 114 of the toner container 16. Further, the removed toner sending member 115 may be driven by receiving inputs from any one of the input gears 106b, 109, 127, and idler gears 108 and 128 of the agitating portion through a gear train.

[0124]

(Construction of Cooling Air trunk)

Figs. 28 and 29 are each a schematic diagram of a gear train disposed on the periphery of the photosensitive drum. Fig. 28 is a side view taken by detaching a side cover, while Fig. 29 is a side view showing the side cover using virtual lines. In the cleaning frame 13, there is provided the sending member 115 that transports removed and collected toner toward the back of the removed toner reservoir 5. There may be cases where the speed of the removed toner sending member 115 needs to be significantly decelerated in the case where the removed toner sending member 115

receives a driving force from the photosensitive drum 11. However, if the removed toner sending member 115 receives a driving force from the toner agitating member 114 in the developer frame 16, the significant
5 deceleration becomes unnecessary and it becomes easy to obtain an appropriate rotational speed. In this case, the gears 111b and 111c are disposed in the vicinity of the photosensitive drum 11 outside of the developer frame 16 and the developing frame 17 (see Fig. 28).

10 [0125]

In the embodiment, to prevent a temperature increase in the vicinity of the photosensitive drum, an air trunk 19f (see Fig. 29) is provided for the rear end cover 19 in the vicinity of the photosensitive
15 drum. Because the gears 111b and 111c in the gear train block the air trunk 19f used to cool the inside, the gears 111b and 111c are provided with slits 34a and 34b so that blades of an axial fan are formed. With this construction, suction and exhaustion are willingly
20 performed through the air trunk 19f.

[0126]

The construction of the cooling air trunk will further be described with reference to Figs. 30, 31, and 32. Fig. 31 is a perspective view of the gear
25 111c. Here, the gear 111b is the same as the gear 111c except that the direction, in which teeth are twisted, and the direction, in which a air trunk is twisted, are

opposite to those of the gear 111c. Therefore, the following description takes the gear 111c as an example. Fig. 32 is a cross sectional view taken along the line B-B in Fig. 31, while Fig. 30 is a cross sectional view taken along the line A-A in Fig. 31.
5 [0127]

The gear 111c is a helical gear. A disk-shaped hub 111c3 connecting a rim 111c2 including a teeth portion to a boss 111c1 is provided with slits 34a that
10 pass through the hub 111c3. When the slits 34a are provided, the circumference of a circle is equally divided. A surface of the hub 111c3 is separated from an inside surface 19i of the rear end cover 19. With this construction, the air trunk 19f provided for the
15 rear end cover 19, through which air enters into and exits from the rear end cover 19, is communicated with the slits 34a through a space 46. A center hole of the boss 111c1 is rotatably supported by an axial portion 19G provided so as to protrude toward the inside of the
20 rear end cover 19 in the lengthwise direction. An unillustrated locating snap ring is fitted around the axial portion 19G, thereby preventing moves in the axial direction. As to the rim 111c2, one side surface 111c4 is disposed in the vicinity of the inside face
25 19i of the rear end cover 19. Both of the side surfaces 19i and 111c4 reduces the passage of air as soon as possible. To do so, both of the side surfaces

19i and 111c4 may get into each other in a labyrinth manner.

[0128]

The slits 34a are provided so as to overlap with
5 the air trunk 19f.

[0129]

As shown in Fig. 32, screw-shaped blades 34g exist between the slits 34a that are adjacent to each other. It is preferable that the adjacent slits 34a are formed
10 like an axial fan so as to aerodynamically improve an air blast efficiency, although it is enough that the blades are provided in a simple slanting manner because the rotational speed of the gear 111c is slow. These slits 34a form an impeller inside of the rim 111c2.

15 [0130]

The gear 111c rotates in a direction indicated by the arrow 34c, as shown in Figs. 31 and 32. In accordance with this rotation, air flows in the axial direction indicated by the arrow 34d and enters into
20 the space 46, as shown in Fig. 30. Then, the air is directed from the space 46 to the air trunk 19f, passes through the air trunk 19f of the rear end cover 19 as indicated by the arrow 34h, and is exhausted outside of the process cartridge.

25 [0131]

The space 46 is brought into simultaneous communication with all of the slits 34a in this manner,

so that all of the blades 34g contribute to the generation of airflow.

[0132]

Also, when the direction 34f of the surface of
5 each blade 34g is reversed, the direction of airflow is reversed even if the rotational direction is not changed. This makes it possible to send air existing outside of the image forming apparatus into the process cartridge 15. It is effective that an advantageous
10 direction of the airflow is selected in view of the positions of parts and the whole construction of the air trunk.

[0133]

It should be noted that if the direction, in which
15 the tooth lines 34e of the helical gear 111c are twisted, is the same as the direction 34f of the blade 34g, air flows in the same axial direction. Also, in the case of resin molding, this construction is advantageous in view of the construction of a mold.
20 Further, in the case where the tooth lines 34e of the gear 111c and the blades 34g are formed so that air is sent in the same axial direction, it is preferable that a space, through which air passes, is provided between the side surface of the rim 111c2 and the inside
25 surface of the rear end cover 19 and a cover is provided as a casing of an air blower along the perimeter of the gear 111c except for its mesh portion.

[0134]

As described above, an impeller is constructed by the slits 34a and the blades 34g including slanting surfaces 34f, with the center of the impeller being set
5 at the center of the gear 111c. Because the gears 111b and 111c rotate during image formation, it becomes possible to exhaust air that resides in the charging portion and cleaning blade portion within the process cartridge 15 and is raised in temperature. During this
10 operation, heat generated by the fixing device 10 and the like is also removed. Note that, in the main body 27 of the image forming apparatus, there are provided a natural vent hole or a ventilation means (not shown), such as a fan, to exchange air in the main body of the
15 image forming apparatus.

[0135]

(Construction of Developing Frame)

Next, the construction of the developing frame 17 will be described with reference to Figs. 7, 9, and 34
20 to 38. Note that, Fig. 9 is a side view taken from one side of the process cartridge 15 under a condition where the rear end cover 19 is detached. Fig. 34 is also a side view taken from one side of the process cartridge 15 under a condition where the rear end cover
25 19 is detached. Fig. 36 is a disassembled perspective view showing a state where respective parts are positioned on the rear end cover 19 of the developing

frame 17 on one side.

[0136]

In the developing frame 17, a developing roller unit, in which the developing roller 18 contains a roller-shaped magnet 23, is rotatably supported by the engagement member 17e functioning as a developing bearing member, and the engagement member 17e is positioned on the developing frame 17 with a small screw 41. Note that, the developing blade (see Fig. 2) and an unillustrated magnetic seal are also provided for the developing frame 17.

[0137]

Meanwhile, one side surface of the magnet 23 is rotatably supported by the inside diameter portion of the developing roller 18 and the other side surface thereof is unrotatably supported by the engagement member 17e including a developing bearing function, thereby maintaining a predetermined gap between the magnet 23 and the developing roller 18. Note that the electric supply to the developing roller 18 is performed via an unillustrated electric contact provided within the developing roller 18. Also, on the developing roller 18, there is provided the spacer roller 18b for maintaining a constant space between the developing roller 18 and the photosensitive drum 11 (see Fig. 37).

[0138]

(Construction for Supporting Developing roller and Magnet)

Next, a construction for supporting the developing roller 18 and the magnet 23 will be described with reference to Figs. 35 and 37. Note that Fig. 35 shows an external perspective view of the engagement member 17e that is a developing bearing member, Fig. 36 is a disassembled perspective view around the engagement member 17e of the process cartridge 15, and Fig. 37 is a partial vertical cross-sectional view of the process cartridge 15.

[0139]

The developing roller 18 is a cylindrical member made of a metallic material such as aluminum or a stainless steel. The outside diameter of the developing roller 18 is around 16 to 20 mm and the material thickness thereof is around 0.5 to 1 mm. Also, in order to increase the chargeability of toner, the surface of the developing roller 18 is subjected to carbon coating, blasting, or the like (in this embodiment, only the carbon coating is performed). Also, in the end portion on the non-driving side of the developing roller 18, there is provided a press-fit hole 18f in which a sleeve flange 18j is press-fitted and fixed.

[0140]

As shown in Fig. 36, the stated sleeve flange 18j

is a stepped hollow cylindrical member that is made of a metallic material, such as aluminum or a stainless steel, and is press-fitted and fixed to an end portion of the developing roller 18. The sleeve flange 18j constructs a press-fit portion 18j1 that is press-fitted in an end portion of the developing roller 18. By press-fitting this press-fit portion 18j1 in the developing roller 18, the sleeve flange 18j is fixed to the developing roller 18. Also, there are formed, outside of the sleeve flange 18j in the axial direction of the press-fit portion 18j1, a rib portion 18j3 having an approximately the same diameter as the developing roller 18 and a small-diameter portion 18j2 that is coaxial with the fit-press portion 18j1 and has a smaller outside diameter. The spacer roller 18b for regulating an opposing distance between the developing roller 18 and the photosensitive drum 11 is put in this flange small-diameter portion 18j2. A journal 18j4 is formed having a smaller diameter than that of the small-diameter position 18j2.

[0141]

Further, for the sleeve flange 18j, a through hole 18j5 is formed coaxially with the journal portion 18j4. An end portion of the magnet 23 is put through this through hole 18j5, thereby positioning the magnet 23 on the developing frame 17 through the engagement member 17e.

[0142]

On the other hand, as shown in Fig. 36, the magnet 23 is composed of a large-diameter portion 23a and bearing supporting portions 23b and 23c that are provided on the end portion of the large-diameter portion 23a. The large-diameter portion 23a is contained in the developer roller 18 and a plurality of magnetic poles are polarized on its surface. In usual cases, one of the plurality of magnetic poles is disposed so as to substantially oppose the photosensitive drum 11 and other magnetic poles are also disposed at optimal positions. The magnetic poles are composed of four poles in total. Also, to stabilize the magnetic force on the developing roller 18, a constant distance is maintained between the surface of the large-diameter portion 23a of the magnet 23 and the surface of the developing roller 18. To maintain this constant distance, the bearing supporting portion 23c of the magnet 23 is supported by the engagement member 17e. Also, to stabilize the circumferential arrangement of the magnetic poles, a D-cut portion 23c1 is formed for the bearing supporting portion 23c of the magnet 23 and the circumferential position of the magnet 23 is regulated by this D-cut portion 23c1. Note that the bearing supporting portion 23b on the other side of the magnet 23 is supported by a magnet roller bearing (not shown) contained in the

sleeve flange 18a (see Figs. 7 and 18) on the other side.

[0143]

Meanwhile, the engagement member 17e is
5 constructed using a member made of a resin, and is
composed of a flange 17e4 with a thickness of around 2
to 5 mm and a protrusion portion 17e2. The protrusion
portion 17e2 has an outside diameter of around 8 to 15
mm and is fitted in the groove 19e of the rear end
10 cover 19. Also, the perimeter of this protrusion
portion 17e2 includes a flat portion 17e1 that is
formed substantially perpendicular to a line connecting
centers of the developing roller 18 and the
photosensitive drum 11. This flat portion 17e1 is a
15 plane receiving the pressurizing force of the elastic
member 67 that is the aforementioned compression coil
spring through the pressing member 67a. With this
construction, the developing roller 18 is pressed
against the photosensitive drum 11 with reliability.
20 As a result, the developing roller 18 is pressurized
with reliability without losing the spring force of the
compression coil spring and the distance between the
photosensitive drum 11 and the developing roller 18
remains constant at all times, thereby realizing
25 stabilized images.

[0144]

Also, within the plane on a side opposite to the

plane including the protrusion portion 17e2 of the flange 17e4 of the engagement member 17e, there is formed the first hole 17e3 as a cylindrical bearing portion. This hole 17e3 is coaxial with the outside diameter of the protrusion portion 17e2 and has an inside diameter of 8 to 15 mm. Also, the journal portion 18j4 of the sleeve flange 18j is rotatably fitted in this hole 17e3, thereby allowing the developing roller 18 to rotatably slide. During sliding, the position of the developing roller 18 in the rotational direction with respect to the photosensitive drum 11 is determined with high precision only by the engagement member 17e and the rear end cover 19. That is, the parallelism of the developing roller 18 against the photosensitive drum 11 is guaranteed. In more detail, even if the rotational center lines of the photosensitive drum 11 and the developing roller 18 are parallel to each other on the sheet plane of Fig. 37, the rotational center lines of the photosensitive drum 11 and the developing roller 18 cross each other on a plane perpendicular to the sheet plane of Fig. 37 and the space between the photosensitive drum 11 and the developing roller 18 varies. This prevents changes of the circumferential developing position in the lengthwise direction.

[0145]

Further, at the back of the hole 17e3 of the

engagement member 17e, the second hole 17e5 that is a D-cut shaped positioning hole is formed coaxially with the protrusion portion 17e2. The D-cut portion 23c1 of the magnet 23 is fitted in the second hole 17e5, so
5 that positions are determined. As a result, the positions of the magnet 23 and the developing roller 18 are determined with high precision only by the engagement member 17e, which means that precision is guaranteed without difficulty.

10 [0146]

Also, one of the four magnetic poles of the magnet 23 substantially opposes the photosensitive drum 11. The position of the magnet 23 with respect to the photosensitive drum 11 is determined by the engagement
15 member 17e and the rear end cover 19, which also makes it easy to guarantee precision.

[0147]

Meanwhile, as shown in Fig. 35, screw holes 17e6 used for positioning are formed at two positions of the
20 flange 17e4 of the engagement member 17e, with an enough distance being maintained therebetween. Also, as shown in Fig. 35, the engagement member 17e is positioned on the developing frame 17 and is securely fixed to the developing frame 17 with the small screw
25 41 (see Fig. 23). Thus, the relative relation is determined between (a) the developing blade 26, the magnetic seal, and the like fixed to the developing

frame 17 and (b) the magnet 23 and the developing roller 18 that are positioned by the engagement member 17e.

[0148]

5 The above-mentioned construction will be described again by following assembling steps with reference to Figs. 36 and 37. The cylindrical press-fit portion 18j1 of the sleeve flange 18j is press-fitted in the press-fit hole 18f that is a hole in an end portion of
10 the developing roller 18, thereby securely fixing the sleeve flange 18j to the developing roller 18. Next, the magnet 23 is inserted. Then, the sleeve flange 18a and a magnet roller bearing (not shown) on the opposite side are inserted, thereby obtaining the developing
15 roller 18.

[0149]

 Next, the spacer roller 18b is fitted in each of the small-diameter portion 18j2 of the sleeve flange 18j and the second cylindrical portion 18c of the
20 sleeve brush 18a, and the developing roller gear 62 (see Figs. 7 and 18) is attached to the two-surface width portion 18e of the sleeve flange 18a in order, thereby integrally attaching these components to the developing frame 17 through the engagement member 17e.
25 Following this, the elastic member 67 that is a compression coil spring to be provided in the groove 19e of the rear end cover 19 is fitted around a

protrusion (not shown) provided on the plane 67b of the pressing member 67a, a unit obtained by integrating the elastic member 67 with the pressing member 67a is attached, and the protrusion portion 17e2 of the engagement member 17e attached to the developing frame 17 is inserted into the groove 19e of the rear end cover 19. In this manner, the pressing member 67a is inserted in defiance of the biasing force of the elastic member 67 (the condition shown in Fig. 37 is obtained).

[0150]

As is apparent from Fig. 37, the developing roller 18 and the magnet 23 are positioned on the rear end cover 19 through the engagement member 17e and a plane receiving the pressurizing force is also provided on the developing frame 17 side. Also, a phase of the D-cut portion 23c1 of the magnet 23 with respect to the magnetic poles is determined at will. However, if the plane of this D-cut portion 23c1 is set as a plane perpendicular to a line connecting centers of the developing roller 18 and the photosensitive drum 11, it becomes possible to realize a concentric similar shape with respect to the protrusion portion 17e2 of the engagement member 17e, which allows parts producers to efficiently perform production.

[0151]

As described above, a plurality of functions are

given to a single part, so that it becomes possible to reduce the number of parts and to provide users with the process cartridge 15 at low cost. Also, the photosensitive drum 11, the developing roller 18, the magnet 23, and other important components that are significantly related to image formation are positioned with less parts. Therefore, the accuracy of relative position between these components is increased, which makes it possible to further stabilize images.

10 [0152]

It should be noted that the first hole 17e3 that is a bearing portion of the engagement member 17e rotatably supports the developing roller 18. Therefore, in some cases, a relatively high-priced material is used having a superior sliding characteristic, such as a PPS base bearing material or a PA base bearing material. Therefore, as shown in Fig. 38, an independent bearing bush 39 may be produced as a bearing member, thereby separating this bearing bush 39 from the main body 17ea of the engagement member. In this case, the bearing bush 39 of the engagement member 17e is put in a hole 17e3a of the engagement member main body 17ea. With this construction, it becomes possible to reduce the volume of a part made of a high-priced material, to use a relative low-priced material, such as HIPS, for the engagement member main body 17ea. As a result, there

is realized cost reduction. Also, by changing the shape of the bearing bush, it becomes possible to integrate the engagement member with the developing frame (it is enough to perform insertion in a slanting direction when assembling the developing roller and the like). With this construction, the number of parts is reduced because small screws and the like become unnecessary. Therefore, there are achieved reductions of the number of parts, the number of assembling steps, and production cost.

[0153]

It should be noted that the aforementioned cartridge has a weight of around 4 kg, a length of around 460 mm, a width of around 300 mm, and a height of around 110 mm.

[0154]

(Means for Mounting Process Cartridge to Apparatus Main Body)

As shown in (L) of Fig. 43, the front surface of the apparatus main body 27 is provided with a double hinged door 60. When this door 60 is opened in the manner shown in (M) of Fig. 43, an opening 100a for inletting the process cartridge 15 is provided on the front surface of the apparatus main body 27, as shown in Fig. 40. It is possible to see a mounting portion 71 for the process cartridge 15 through this opening 100a.

[0155]

As shown in Fig. 42, as can be seen through the opening 100a, a main body fixation guide 72, the first guide concave portion 73a, the second concave portion 73b, and a flat guide portion 73c are fixed in the apparatus main body 27 in a direction from the front to the back. Here, the main body fixation guide 72, the first guide concave portion 73a and the second concave portion 73b each have a guide rail shape, and the components numbered 73a to 73c are hereinafter collectively referred to as the "guide 73". Also, the guide 72 is provided at the upper-left corner of the opening 100a and the guide 73 is provided at the lower-right corner of the opening 100a. This guide 72 is a line groove and extends substantially parallel to the photosensitive drum 11. This line groove is a raceway surface that has a circular section opening upward. The first and second guide concave portions 73a and 73b extend parallel to the main body fixation guide 72.

[0156]

As shown in Fig. 43, there is no back portion of the guide 72, thereby providing a dropping portion 72a. The guide 73 is disposed so that it extends from the opening 100a backward, and reaches a hole shaped member 53 provided on a cartridge mounting portion back plate 52 existing at a backmost position viewed from the opening portion 100a. The hole shaped member 53

includes a substantially cylindrical hole 53a. This hole 53a is substantially parallel to the photosensitive drum 11 and exists on a straight line of the guide 73 view from above. Note that, the center of the hole 53a of the hole shaped member 53 exists at a position that is higher than that of the circular arc of the circular raceway of the guide rail 73. This will be described in more detail later in conjunction with the description of operations.

10 [0157]

An up-and-down lever 78 is provided as a movable member at the upper-left back corner of the cartridge mounting portion 71. The up-and-down lever 78 is rotatably provided to an end plate 100b on the front side of the apparatus main body 27 and a back plate 52 using an axis 74. The axis 74 passes through the end plate 100b and protrudes frontward. The base portion of a main body lever 77 is fixed to this protrusion portion. Note that, the axis 74 is horizontally disposed perpendicular to the transport direction of a recording medium. Accordingly, the up-and-down lever 78 is operated by the main body lever 77 so that this lever 78 slides vertically. The up-and-down lever 78 is provided with a cam groove 78a. This cam groove 78a functions as a bearing portion for an engagement member 20n (to be described later) of the process cartridge 15.

[0158]

The main body first coupling 103 and the main body second coupling 104 are exposed in a space functioning as the cartridge mounting portion 71 from the cartridge mounting portion back plate 52 of the apparatus main body 27.

[0159]

The bottom side of the cartridge mounting portion 71 is a transport path for a sheet S that is a recording medium. On the both ends of the transfer roller 9 located in this transport path, a pair of main body positioning concave portions 75 (75a, 75b) is provided for a pair of stands provided to protrude upward. The shaft 22a1 provided for the bearing member 22a supporting the photosensitive drum 11 of the process cartridge 15 is fitted in the positioning concave portion 75a (on the front side in the direction in which the process cartridge is to be mounted). The shaft 22a1 exists on the axial line of the photosensitive drum 11, thereby precisely positioning one end of the photosensitive drum 11 on the non-driving side with respect to the apparatus main body 27. The bearing member 22b that concentrically surrounds the first coupling 105a on the process cartridge side is fitted in the positioning concave portion 75b. This bearing member 22b is a circular member and functions as a positioning portion. Under

this condition where the bearing member 22b is fitted in the positioning concave portion 75b, the center of the bearing member 22b, which is to say the center of the photosensitive drum 11, exists on substantially the same line as the center of the main body first coupling 103. Here, the difference between the centers of the main body first coupling 103 and the bearing member 22b is within a range of from 100 μ m to 1 mm. Therefore, when the main body first coupling 103 rotates, the first coupling 105a on the process cartridge side is aligned. Then, the photosensitive drum 11 rotates about a rotational center that is the same as that of the main body first coupling 103. Accordingly, while the photosensitive drum 11 is rotating, the bearing member 22b that is a positioning portion is not securely positioned on the positioning concave portion 75b existing backward but is placed in a floating state. Next, a cartridge mounting mean on the process cartridge side will be described.

[0160]

As shown in Figs. 5 and 6, when viewed in a mounting direction, the first guide portion 15a to be guided by the main body fixation guide 72 is provided at back upper-left corner portion of the process cartridge 15. This first guide portion 15a includes a tip that is directed downward in a slanting manner. This tip has a circular section and has a shape that is

substantially parallel to the photosensitive drum 11.
The tip of the first guide portion 15a is engaged with
the raceway surface of the line groove of the guide 72
having a circular section. This first guide portion
5 15a exists only at the back in the process cartridge
mounting direction. This first guide portion 15a
includes a horizontal protrusion portion 15a-1 that is
substantially parallel to the upper surface of the
cartridge frame portion and a lower protrusion portion
10 15a-2 that protrudes downward from the horizontal
protrusion portion 15a-1. The lower end of the lower
protrusion portion 15a-2 is guided by the main body
fixation guide 72.

[0161]

15 As shown in Fig. 6, the second guide portion 20g
is provided at the back lower position that is farthest
rightward from the aforementioned first guide portion
15a, when viewed in the process cartridge mounting
direction. This second guide portion 20g includes a
20 protrusion 20g1 having a round boss shape that extends
substantially parallel to the photosensitive drum 11
and a supporting portion 20g2 that is integrated with
the protrusion 20g1 and is connected to the front end
cover 20. The protrusion 20g1 has a substantially
25 cylindrical shape. The lower portions of the
protrusion 20g1 and the supporting portion 20g2 are
connected to each other and the cross section thereof

has a circular arc shape. The diameter of the protrusion 20g1 is determined so that the protrusion 20g1 is loosely fitted in the hole 53a of the hole shaped member 53. The second guide portion 20g is
5 integrally formed with the front end cover 20.

[0162]

As shown in Fig. 5, on the back upper-left corner in a direction in which the process cartridge 15 is mounted to the apparatus main body 27, an engagement
10 member 20n that has a round pin shape and protrudes in the mounting direction is integrally provided for the front end cover 20. The position of this engagement member 20n is slightly higher than the position of the base portion of the aforementioned first guide portion
15 15a. The engagement member 20n protrudes upward from the upper surface of the cartridge frame portion. The engagement member 20n also protrudes from the tip surface of the cartridge frame portion in a direction in which the process cartridge 15 is entered into the
20 apparatus main body 27. Here, the stated tip surface is a surface that will be positioned at a tip when the process cartridge 15 is entered into the apparatus main body 27. Here, the stated upper surface is a surface facing upward when the process cartridge 15 is entered
25 into the apparatus main body 27. Note that, the first guide portion 15a is connected to both of a portion integrally formed with the front end cover 20 and a

portion integrated with the cleaning frame 13. Also, there is provided the second guide portion 20g on the back lower-right corner when viewed in the direction in which the process cartridge 15 is mounted in the apparatus main body 27. As shown in Fig. 6, an inclined plane 20g3 is provided on the lower side of the protrusion 20g1 of this second guide portion 20g. Also, the third guide portion 19g, which includes the center of the circular arc directed downward on a line that passes through the center of the protrusion 20g1 of the second guide portion 20g in parallel to the photosensitive drum 11, is provided on the front lower-right side, when viewed in the direction in which the process cartridge 15 is mounted in the apparatus main body 27. The third guide portion 19g is integrally formed with the rear end cover 19.

[0163]

The process cartridge 15 is inserted into the main body 27 of the image forming apparatus in the manner described below. First, as shown in Fig. 43A, an operator opens the door 60 provided on the front side of the main body 27 of the image forming apparatus (on the non-driving side in the axial direction of the photosensitive drum). Next, the operator grasps the first handle 30 provided on the upper surface of the process cartridge 15 with one hand, lifts up the process cartridge 15, grasps the frontward second

handle 29 with the other hand, and pushes the process cartridge 15 into the opening 100a toward the cartridge mounting portion 71. As shown in Fig. 40, the first guide portion 15a of the process cartridge 15 is
5 mounted on the main body fixation guide 72, while the second guide portion 20g is mounted on the second guide concave portion 73b. Then, from the lengthwise direction of the photosensitive drum 11, the operator inserts the process cartridge 15 into the main body of
10 the image forming apparatus in a straight line (backward on the sheet plane of Fig. 40, in the arrow directions in (M) and (N) of Fig. 43).

[0164]

Here, the main body fixation guide 72, which
15 allows the first guide portion 15a to move within the main body of the image forming apparatus in the axial direction of the electrophotographic photosensitive drum, is divided in the photosensitive drum axial direction, thereby obtaining the dropping portion 72a
20 in which there does not exist the main body fixation guide 72. Here, as shown in (H) of Fig. 44, the first guide portion 15a slides on the main body fixation guide 72 and comes near the dropping portion 72a. Then, as shown in (I) of Fig. 44, the engagement member
25 20n existing back in the process cartridge insertion direction engages with the cam groove 78a of the up-and-down lever 78. Following this, as can be seen from

(I) to (J) of Fig. 44, the first guide portion 15a is detached from the main body fixation guide 72 and the engagement portion 20n is supported by the up-and-down lever 78. As a result, a part of the process cartridge 15 is supported.

[0165]

On the other hand, after the first guide portion 15a of the process cartridge 15 is first mounted on the main body fixation guide 72 and the second guide portion 20g on the back lower-right corner of the process cartridge 15 is simultaneously mounted on the guide 73, the operator pushes the process cartridge 15 backward. Consequently, the second guide portion 20g moves backward by sliding on the guide 73. Then, before the protrusion 20g1 of the second portion 20g reaches the hole-shaped member 53, the third guide portion 19g existing at the front lower-right corner in the insertion direction of the process cartridge 15 engages with the second guide concave portion 73b. Note that as shown in Fig. 6, the third guide portion 19g includes an inclined plane 19g1 at the front end thereof in the insertion direction of the process cartridge 15, so that the third guide portion 19g smoothly enters into the second guide concave portion 73b. In this manner, the lower-right corner of the process cartridge 15 in its insertion direction is supported by the second guide concave portion 73b in

the cartridge mounting portion 71. Also, under this condition, the first guide portion 15a at the back upper-left corner in the insertion direction is supported by the main body fixation guide 72. When the process cartridge 15 is further inserted, the protrusion 20g1 at the back lower-right corner of the process cartridge 15 is inserted into the hole 53a of the hole-shaped member 53 at the timing when the aforementioned engagement member 20n engages with the cam groove 78a of the up-and-down lever 78. During this operation, the back right corner of the process cartridge 15 is lifted up because the center of the hole 53a of the hole-shaped member 53 exists at a position higher than the center of the protrusion 20g1 under a condition where this protrusion is guided by the first guide concave portion 73a.

[0166]

Under a condition where the protrusion 20g1 is fitted into the hole 53a of the hole shaped portion 53 and the engagement member 20n engages with the cam groove 78a of the up-and-down lever 78, the first guide portion 15a has reached the dropping portion 72a and the third guide portion 19g is placed on the second guide concave portion 73b. This means that the process cartridge 15 is supported at three points in total.

[0167]

The main body lever 77 is held by an unillustrated

notch when the lever is at a position indicated by a solid line in Fig. 40. When the main body lever 77 is rotated in the direction indicated by the arrow B in this drawing, the axis 74 is also rotated and the up-
5 and-down lever 78 is rotated in a direction for moving the cam groove 78a downward. As a result, as shown in Fig. 46, the process cartridge 15 moves downward by rotating about the protrusion 20g being fitted in the hole 53a of the hole shaped portion 53 and the third
10 guide portion 19g supported by the second guide concave portion 73b. During this, the process cartridge 15 is supported by the cam groove 78a on which the engagement member 20n is mounted. Then, the bearing members 22a and 22b that are positioning portions are respectively
15 fitted in the positioning concave portions 75a and 75b of the apparatus main body 27. Then, when the main body lever 77 is rotated to a position at which it is held horizontally, the mounting of the process cartridge 15 to the apparatus main body 27 (see Fig.
20 41) is finished. Note that the main body lever 77 is separated from the engagement member 20n, further moves downward, and stops.

[0168]

Here, how the process cartridge 15 is moved
25 downward by means of the up-and-down lever 78 will be described with reference to Fig. 46.

[0169]

In Fig. 46, under a condition where the process cartridge 15 is inserted into the back of the cartridge mounting portion 71 through the opening 100a, the process cartridge 15 is at a high position (H) (a symbol "H" is added to the reference numeral representing the process cartridge). At this position (H), the process cartridge 15(H) is held in a condition where the engagement portion 20n is supported by the up-and-down lever 78, the protrusion 20g1 is supported to the hole 53a of the hole-shaped portion 53, and the third guide portion 19g is supported by the second guide concave portion 73b.

[0170]

When the cam groove 78a side of the up-and-down lever 78 moves downward, the engagement member 20n also moves downward. During this movement, a center line connecting the center of the protrusion 20g1 and the center of the third guide portion 19g serves as a rotational center for the mounting operation of the process cartridge 15. The engagement member 20n moves toward the axis 74 on a bottom surface 78b of the cam groove 78a, so that the process cartridge 15 drops due to its own weight. At a position where the process cartridge 15 drops to a midway point and the engagement member 20n comes to coincide with a straight line connecting the circular arc center of the third guide portion 19g and the center of the axis 74, the

engagement member 20n comes closest to the axis 74. A
cam curve at the bottom of the cam groove 78a is
selected such that, while the up-and-down lever 78
moves downward from the position 78(H) (a symbol is
5 added to the reference numeral 78), the engagement
member 20n moves on a center line CL connecting the
center of the engagement member 20n and the center of
the axis 74 at the position 78(H). When the cam groove
78a side of the up-and-down lever 78 further moves
10 downward, the engagement member 20n moves while sliding
on the bottom surface 78b of the cam groove 78 in a
direction in which it moves apart from the axis 74.
Then, after the process cartridge 15 is fitted in the
positioning concave portions 75 under a condition where
15 the engagement member 20n does not reach a circular arc
portion outer wall 78c of the cam groove 78a continuous
with the right end of the bottom surface 78b, the
engagement member 20n is placed in a non-movable
condition. Then, the circular arc groove portion outer
20 wall 78c of the cam groove 78a moves under a condition
where this circular arc groove portion outer wall 78c
is separated from the engagement member 20n, and an
opening portion 78d of the cam groove 78a comes to a
position where with the engagement member 20n exists.
25 Note that the circular arc groove portion outer wall
78c and an inner wall 78e are each a circular arc whose
center is the axis 74, and the distance between the

groove portion external wall 78c and the internal wall 78e is larger than the width of the engagement member 20n. A space between the outer wall 78c and the inner wall 78e is opened upward to form the opening 78d.

5 [0171]

During the insertion of the process cartridge 15 backward, the main body first coupling 103 and the main body second coupling 104 that are both driving force transmission members engage with the first coupling 105a and the second coupling 106a, respectively, which are both driving force receiving members on the process cartridge side. Note that there are cases where engagement between the paired couplings is not established. However, when the couplings on the main body side are driven, these couplings on the main body side being biased by a spring force move forward and engagement between the couplings is instantaneously established.

[0172]

20 When an unillustrated driving source of the apparatus main body 27 is driven and the main body first coupling 103 and the coupling 105a on the process cartridge side are rotated, these couplings are aligned and their center lines coincide with each other. As a result, the photosensitive drum 11 is aligned with the first coupling 103 on the apparatus main body side. The alignment amount in this case is around 100 microns

to one millimeter from a position at which the bearing member 22b of the process cartridge 15 is fit in the main body positioning concave portion 75b. During driving, the process cartridge 15 is supported by the positioning concave portion 75a placed frontward in the insertion direction, the hole shaped portion 53, and the fitting of the first coupling 105a on the process cartridge side in the main body first coupling 103. Also, as described above, driving force transmission is performed unhindered even if the center line of the main body second coupling 104 and the center line of the second coupling 106a on the process cartridge side do not coincide with each other.

[0173]

It should be noted here that when the process cartridge 15 moves downward and is placed at the mounting position, this process cartridge 15 is supported by the positioning concave portion 75a, the hole 53a of the hole-shaped member 53, and the main body positioning concave portion 75b.

[0174]

That is, the cartridge 15 is mounted at the mounting position under a condition where the positioning member (shaft 22a1) is fitted in the main body positioning concave portion 75a, the positioning member (bearing member 22b) is fitted in the main body positioning concave portion 75b, and the protrusion.

20g1 is fitted in the hole 53a.

[0175]

When the main body lever 77 is rotated from the condition shown in Fig. 41 in the direction indicated
5 by the arrow C in this drawing, the axis 74 is rotated in the same direction and the up-and-down lever 78 moves upward. Then, the engagement member 20n, which exist at the back upper-left corner when viewed in the insertion direction of the process cartridge 15, is
10 lifted up by the cam groove 78a. Consequently, the protrusion 20g1, which is placed at the back lower-right corner when viewed in the insertion direction of the process cartridge 15, rotates within the hole-shaped member 53 of the apparatus main body 27, the
15 left portion of the process cartridge 15 when viewed in the insertion direction is lifted up, the shaft 22a1 is moved slightly upward to be separated from the positioning concave portion 75a, the bearing member 22b is moved slightly upward to be separated from the
20 positioning concave portion 75b, and the third guide portion 19g, which is positioned at the front lower-right corner when viewed in the insertion direction of the process cartridge 15, moves downward and is supported by the second guide concave portion 73b. As
25 a result, the process cartridge 15 is placed in a condition where the protrusion 20g1 is supported by the hole-shaped portion 53 and the third guide portion 19g

is supported by the third guide concave portion 73b. At this time, the engagement member 20n moves upward and the process cartridge 15 is placed in the state shown in Fig. 40 by taking the protrusion 20g1 and the
5 lower circular arc portion of the third guide portion 19g as a rotational center. During this movement, the first guide portion 15a at the back upper-left corner of the process cartridge 15 passes through the dropping portion 72a and is thus placed at a position at which
10 this first guide portion 15a is able to enter into the main body fixation guide 72 when viewed from the front of the apparatus main body 27. Here, when the operator grasps the second handle 29 and pulls it frontward in the state shown in Fig. 40, the engagement member 20n
15 at the back upper-left corner of the process cartridge 15 lightly engages with the cam groove 78a that is a receiving portion for this member and the protrusion 20g1 at the back lower-right corner in the insertion direction of the process cartridge 15 also moves in a
20 direction in which the protrusion 20g1 moves apart from the hole-shaped portion 53. Following this, since the first guide portion 15a at the back upper-left corner in the insertion direction of the process cartridge 15 has moved to the dropping portion 72a, when the process
25 cartridge 15 is pulled frontward, the first guide portion 15a becomes mounted on the main body fixation guide 72 and thereafter the pin-like engagement member

20n at the back upper-left corner in the insertion direction of the process cartridge 15 is detached from the cam groove 78a. Also, at almost the same time, the protrusion 20g1 at the back lower-right corner in the insertion direction of the process cartridge 15 is detached from the hole shaped portion 53 and the right side of this cartridge when viewed from the front of the apparatus main body 27 is placed in a condition where the second and third guide portions 19g and 20g become mounted on the first and second guides 73a and 73b, respectively. When the process cartridge 15 is pulled out, the first guide portion 15a slides on the main body fixation guide 72, the second and third guide portions 19g and 20g slide on the guide 73, and the third guide portion 19g first passes through the opening 100a to the outside and is detached from the guide 73. Following this, when the operator pulls the process cartridge 15 frontward while supporting the process cartridge 15 using the second handle 29, the first guide portion 15a moves to the front end of the main body fixation guide 72 and the second guide portion 20g moves to the front end of the main body fixation guide 73b. Here, when the operator further pulls the process cartridge 15 toward the outside of the opening 100a by grasping the first handle 30, the first guide portion 15a is detached frontward from the front end of the main body fixation guide 72 and the

second guide portion 20g is detached frontward from the front end of the second guide 73b.

[0176]

As to the guides of the apparatus main body 27 and
5 the guide portions of the process cartridge 15, there may be provided a plurality of dropping portions and a plurality of guide portions. For instance, Fig. 45 is each a plan view showing the insertion of a process cartridge according to another embodiment into the
10 apparatus main body. In Fig. 45, there is obtained a construction in which a dropping portion 72b is added to a position midway through the main body fixation guide 72. In this case, when the first guide portion 15a overlaps with the dropping portion 72a, a guide
15 portion 15b existing on the front side in the insertion direction overlaps with the dropping portion 72b.

[0177]

There is obtained a construction in which the mounting and detachment of the process cartridge 15 is
20 performed in the manner described above, so that when a sheet that is a recording medium is passed into the image forming apparatus, that is to say, when a rotation force and a driving force are applied to the photosensitive drum 11 in a clockwise direction, the
25 protrusion 20g1 is fitted in the hole shaped portion 53 of the image forming apparatus and the rotation of the process cartridge 15 is stopped. As a result, the

posture of the process cartridge 15 is maintained.
That is, the rocking center, about which the process
cartridge 15 rocks when it is mounted to or detached
from the apparatus main body 27, functions as a
5 rotation stopper during the sheet passing. Further,
the stability of a pivot during the rocking can be
enhanced.

[0178]

Even if the process cartridge increases in weight
10 and size in accordance with the upsizing of the image
forming apparatus, it is possible to mount the process
cartridge to the image forming apparatus merely by
horizontally pushing the process cartridge and
performing a lever operation to place a lever at a
15 predetermined position. That is, the operation that an
operator is required to perform by directly carrying
the process cartridge is only the insertion thereof in
a straight line. As a result, the handling of the
process cartridge becomes easy.

20 [0179]

Also, the process cartridge is positioned with
reliability only by the lever operation, so that
operability is enhanced and the accuracy of positioning
of the process cartridge is improved.

25 [0180]

Also, it is possible to inversely detach the
process cartridge from the image forming apparatus

merely by pulling the process cartridge frontward after a lever operation, so that superior operability is realized even in the case of a large-sized process cartridge.

5 [0181]

Also, the first and second guide concave portions supporting the process cartridge from the lower side are provided on the lower side of an end portion of the developer frame so that an enough distance is
10 maintained between these guide concave portions and the photosensitive drum. As a result, the center of the photosensitive drum traces a circular arc path that extends in a nearly vertical direction. Also, the up-and-down lever is provided with a cam groove and the
15 pin-like engagement member of the process cartridge is inserted into this cam groove, which simplifies the construction of the up-and-down means of the process cartridge. Further, the weight of the process cartridge placed on the up-and-down means is directly
20 applied to an operation lever (main body lever 77) not through a link mechanism. Therefore, operation feeling is acute and it becomes possible for the operator to move upward and downward the process cartridge at an appropriate speed.

25 [0182]

In accordance with the embodiment described above, there is obtained an effect that cost reduction is

achieved by reducing the number of parts and images with higher stability are formed by improving the accuracy of attachment of important parts related to image formation.

5 [0183]

Also, in accordance with the embodiment, it becomes possible to provide the engagement member (groove 17e) that rotatably supports the developing roller in the vicinity of an end portion in the axial
10 line direction of the developing roller and to regulate relative positions of the magnet roller and the developing roller using the engagement member. Also, a substantially cylindrical protruding portion that is coaxial with the developing roller is provided for the
15 engagement member so as to protrude to the outside, and this protruding portion is provided with a positioning portion for regulating relative positions of the developer roller and the photosensitive drum and a receiving plane for pressurizing the developing roller
20 against the electrophotographic photosensitive member. As a result, it becomes possible to achieve cost reduction by reducing the number of parts and to form images with higher stability by improving the accuracy of attachment of important parts related to image
25 formation.

[0184]

[Effect of the Invention]

According to the present invention, a predetermined pressurizing force is generated between the developing roller and the electrophotographic photosensitive drum and therefore a constant space is maintained between these members. As a result, it becomes possible to obtain stable images. Also, cost reduction and space saving are achieved by reducing the number of parts.

[Brief Description of the Drawings]

10 [Fig. 1] A vertical cross-sectional view of an electrophotographic image forming apparatus.

 [Fig. 2] A vertical cross-sectional view of a process cartridge.

 [Fig. 3] A front view of the process cartridge.

15 [Fig. 4] A back view of the process cartridge.

 [Fig. 5] A perspective view as viewed from the front upper-right of the process cartridge in a mounting direction.

 [Fig. 6] A perspective view as viewed from the lower right of the process cartridge in a direction opposite to the mounting direction.

 [Fig. 7] A disassembled perspective view of the process cartridge.

 [Fig. 8] A substantially back view of the process cartridge from which a side cover has been detached.

25 [Fig. 9] A substantially front view of the process cartridge from which a side cover has been

detached.

[Fig. 10] A perspective view illustrating a sheet member that seals a space between a toner container and a developing frame.

5 [Fig. 11] A perspective view illustrating the sheet member that seals the space between the toner container and the developing frame.

[Fig. 12] A perspective view showing how the sheet member is applied.

10 [Fig. 13] A perspective view showing how the sheet member is applied.

[Fig. 14] A perspective view showing how the sheet member is applied.

15 [Fig. 15] A perspective view showing how the sheet member is applied.

[Fig. 16] A disassembled perspective view of the process cartridge provided with a sheet member according to another embodiment that seals the space between the toner container and the developing frame.

20 [Fig. 17] A vertical cross-sectional view of the process cartridge provided with the sheet member according to the other embodiment that seals the space between the toner container and the developing frame.

[Fig. 18] A disassembled perspective view of a
25 developing device illustrating a construction of the connection between developing frame and a cleaning container.

[Fig. 19] A partial perspective view of the developing device.

[Fig. 20] A disassembled perspective view showing the construction of the connection between the
5 developing device and a cleaning frame.

[Fig. 21] A perspective view showing the connection between the developing device and the cleaning frame.

[Fig. 22] A back view showing a connecting
10 portion of the developing device and the cleaning frame.

[Fig. 23] A disassembled perspective view showing a relation between the developing frame and a side cover.

15 [Fig. 24] A perspective view showing the coupling for driving a photosensitive drum.

[Fig. 25] A back view showing the coupling for driving an agitating member.

[Fig. 26] A back view showing the coupling for
20 driving the agitating member.

[Fig. 27] A system diagram of a driving system of the process cartridge.

[Fig. 28] A front view showing a cooling means of the process cartridge.

25 [Fig. 29] A front view showing the cooling means of the process cartridge.

[Fig. 30] A cross sectional view taken along the

line A-A in Fig. 31.

[Fig. 31] A perspective view of a gear with an impeller.

[Fig. 32] A cross sectional view taken along the
5 line B-B in Fig. 31.

[Fig. 33] A vertical cross-sectional view of a conventional process cartridge.

[Fig. 34] A partial front view of the process cartridge from which a side cover has been detached;

10 [Fig. 35] (a) is a back perspective view of a protruding member, and (b) is a front perspective view of the protruding member.

[Fig. 36] A disassembled perspective view of a developing roller of the process cartridge around a
15 bearing thereof.

[Fig. 37] A developed cross-sectional view showing a construction for supporting one ends of the developing roller and the photosensitive drum.

[Fig. 38] A perspective view of a protruding
20 member according to another embodiment.

[Fig. 39] A front view showing a cartridge mounting portion of the main body of the image forming apparatus.

[Fig. 40] A front view showing the insertion and
25 detachment of the process cartridge into and from the main body of the image forming apparatus.

[Fig. 41] A front view showing the mounting of

the process cartridge to the main body of the image forming apparatus.

[Fig. 42] A perspective view showing the cartridge mounting portion of the main body of the image forming apparatus.

[Fig. 43] (L), (N) and (M) are each a plan view showing how the process cartridge is inserted into the main body of the image forming apparatus.

[Fig. 44] (H), (I) and (J) are each a side cross-sectional view showing relations among an up-and-down lever and a guide portion of the process cartridge and a guide rail of the main body of the image forming apparatus.

[Fig. 45] (P), (Q) and (R) are each a plan view showing how the process cartridge is inserted into the main body of the image forming apparatus according to another embodiment.

[Fig. 46] A side view showing a path traced by the process cartridge in the cartridge mounting portion.

[Fig. 47] A plan view of the process cartridge.

[Fig. 48] A bottom view of the process cartridge.

[Description of Reference Numerals or Symbols]

C: Electrophotographic image forming apparatus
D: Developing device
S: Sheet
g1: Space g2: Space

- 1: Sheet delivery roller
- 2: Delivery portion
- 5: Removed toner reservoir
- 6: Sheet cassette
- 5 7: Transport roller
- 8: Exposing device
- 9: Transfer roller
- 10: Fixing device
- 11: Photosensitive drum
- 10 11a: Flange 11b: Flange 11al: Gear
- 12: Charging roller
- 13: Cleaning frame
 - 13a: Hole portion 13b: Positioning hole
 - 13c: Side surface 13d: Shaft shaped spring peg
 - 15 13e: Dowel 13g: Exposure opening
- 14: Cleaning blade
- 15: Process cartridge
 - 15a: First guide portion
 - 15a-1: Horizontal protrusion portion
 - 20 15a-2: Lower protrusion portion
 - 15b: Guide portion
- 16: Developer frame
 - 16a: Positioning portion
 - 16b: Positioning portion
 - 25 16c: Developer supplying opening portion
 - 16d: End surface
 - 16e: Concave portion

- 16f: Opposing surface
- 16g: Toner loading opening
- 16h: Developer container
- 17: Developer frame
 - 5 17a: Opening portion
 - 17b: Developer receiving opening portion
 - 17c: Arm
 - 17d: Suspending hole
 - 17e: Engagement member
 - 10 17ea: Engagement member main body
 - 17e1: Flat portion 17e2: Protrusion portion
 - 17e3: First hole 17e3a: Hole 17e4: Flange
 - 17e5: Second hole 17e6: Screw hole
 - 17g: Opposing surface 17h: Blade stand plane
 - 15 17i: Internal thread 17l: Circular arc surface
 - 17k: Groove 17m: Lower jaw portion
 - 17n: First straight line portion
 - 17p: Second straight line portion
- 18: Developing roller
 - 20 18a: Sleeve flange
 - 18a1: Large-diameter portion
 - 18a2: Intermediate portion
 - 18a3: Small-diameter portion
 - 18a4: Through hole 18b: Spacer roller
 - 25 18c: Second cylindrical portion
 - 18d: First cylindrical portion
 - 18e: Two-surface width portion

18f: Press-fit portion
18g: Inner radius portion 18j: Sleeve flange
18j1: Press-fit portion
18j2: Small-diameter portion 18j3: Rib portion
5 18j4: Journal 18j5: Through hole
19: Rear end cover
19a: Hole portion 19b: Positioning portion
19c: Positioning portion
19d: Positioning portion 19e: Groove
10 19e1, 19e2: Guide plane
19e3: Receiving plane 19f: Air trunk
19g: Third guide portion 19g1: Inclined plane
19h: Hole 19i: Inside surface
19G: Axial portion
15 20: Front end cover
20a: Hole portion 20e: Hole portion
20g: Second guide portion 20g1: Protrusion
20g2: Supporting portion 20g3: Inclined plane
20n: Engagement member
20 21: Flexible seal
21a: Layer 21b: Released paper
21d: End portion 21e: First opening
21f: Second opening 21i: Sheet member
21k: First bonding portion
25 21m: Second bonding portion
22, 22a: Bearing member 22a1: Shaft 22a2: Flange
22b: Bearing member

- 23: Magnet roller
 - 23a: Large-diameter portion
 - 23b, 23c: Bearing supporting portion
 - 23c1: D-cut portion
- 5 24: Developer seal
- 25: Toner sealing member
- 26: Developing blade
 - 26a: Sheet metal 26b: Urethane rubber
 - 26c: Screw hole 26d: Fitting hole
 - 10 26e: Bent portion 26f: Hole 26g: Hole portion
- 27: Apparatus main body
- 28: Small screw
- 29: First handle
- 30: Second handle 30a: Base portion
- 15 31: Attachment and holding member
 - 31a: Orifice hole
- 32: Heating element
- 33: Plate-shaped member
 - 33a: Welded portion
 - 20 33b: Connecting member opening
 - 33c: Concave portion 34a: Slit
 - 34b: Opening portion 34e: Tooth line
 - 34f: Direction of blade surface 34g: Blade
- 36: Tension coil spring
- 25 36a: Hook portion 36b: Hook portion
- 36c: Straight line portion
- 37: Toner cap

39: Bearing bush
40: Housing
41: Small screw
45: Developing under cover
5 46: Space
49: Small screw
52: Cartridge mounting portion back plate
53: Hole shaped member 53a: Hole
58: Contact sheet metal
10 58a: Outer contact portion
58b: Contact sheet metal
58c: Plate spring portion
60: Door
61: Elastic seal member
15 61a: First straight line portion
61b: Ear portion
61c: Second straight line portion
62: Developing roller gear
63: Developing bearing
20 63a: Bearing portion 63b: Screw hole
63c: Dowel 63d: Dowel 63e: Dowel
63g: Plane portion
64: Small screw 64b: Gear portion
66: Parallel pin (rocking center)
25 66a: Slide piece
67: Elastic member 67a: Pressing member
67b: Flat surface

68: Small screw

71: Cartridge mounting portion

72: Main body fixation guide

72a, 72b: Dropping portion

5 73: Guide 73a: First guide concave portion

73b: Second guide concave portion

73c: Flat guide portion

74: Axis

75 (75a, 75b): Main body positioning concave

10 portion

76: Stand member

77: Main body lever

78: Up-and-down lever

78a: Cam groove 78b: Bottom surface

15 78c: Circular arc portion outer wall

78d: Opening portion 78e: Inner wall

82: Tension coil spring

83: Developer container

85: Process cartridge

20 86: Toner container

87: Cleaning container

89: Connecting pin

100a: Opening

101: Driving source on apparatus main body side

25 102: Driving source on apparatus main body side

103: Main body first coupling

103a: Concave portion

- 104: Main body second coupling
 - 104a: Abutment portion 104b: Abutment portion
 - 104d: Perimeter
- 105: Gear flange
 - 5 105a: First coupling on process cartridge side
 - 105a1: Convex portion 105b: Input gear
 - 106a: Second coupling on process cartridge side
 - 106b: Input gear 106d: Concave portion
 - 106f: Abutment portion 106g: Surface
- 10 107: Gear flange of developing roller
 - 107b: Driving gear of developing roller (sleeve gear)
- 108: Idler gear 108a: Shaft
- 109: Agitating driving gear
- 15 110: Agitating output gear
 - 111a: Idler gear 111b: Idler gear
 - 111c: Idler gear 111c1: Boss 111c2: Rim
 - 111c3: Hub 111c4: One side surface
- 112: Removed toner sending portion input gear
- 20 113: Toner agitating member
- 114: Toner agitating member
- 115: Removed toner sending member
- 116a: Bearing 116b: Bearing 116c: Bearing
- 116d: Bearing 116e: Bearing
- 25 117a: Bearing 117b: Bearing 117c: Bearing
- 117d: Bearing 117e: Bearing 117g: Bearing
- 118a: Stand roller 118b: Stand roller

119: Bearing flange


120: Bearing flange

123: Toner agitating member


124, 125: Gear

【書類名】 図面 [Name of the Document] Drawings


【図1】 Fig. 1

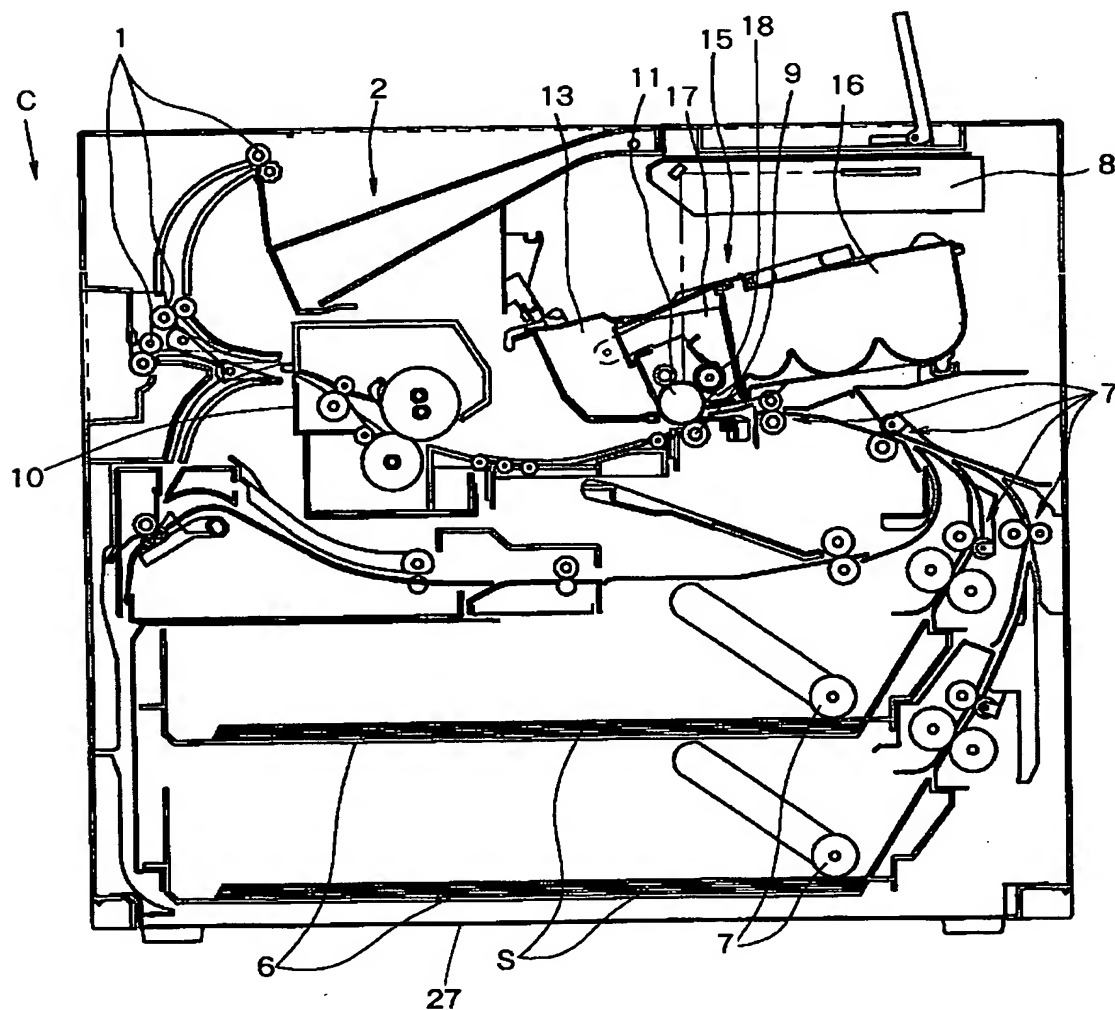


【図2】 Fig. 2

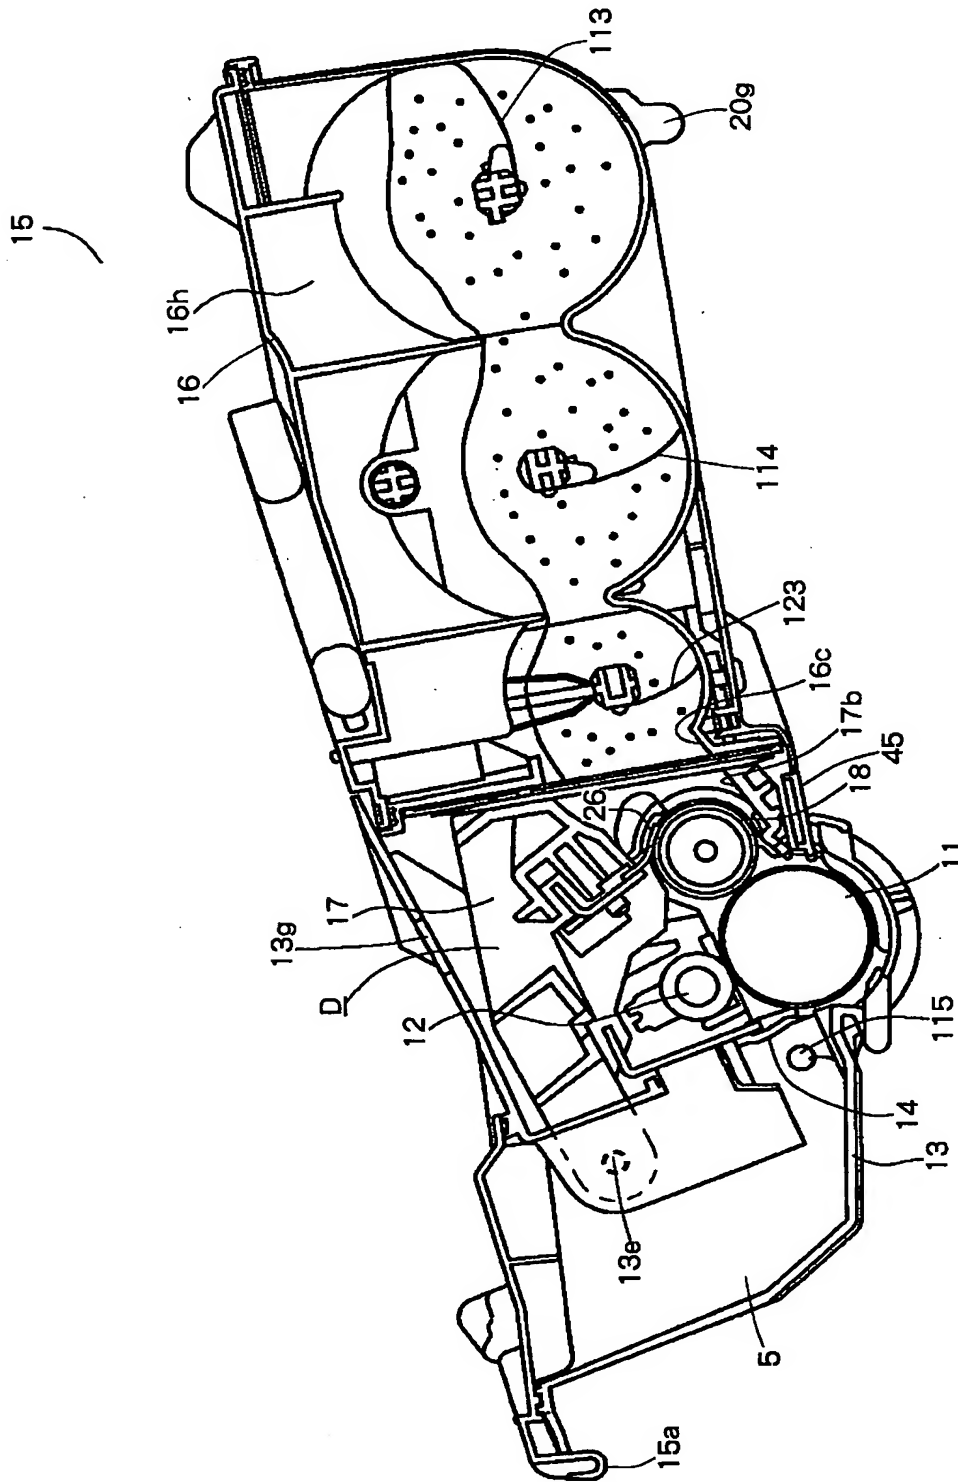


【図3】 Fig. 3

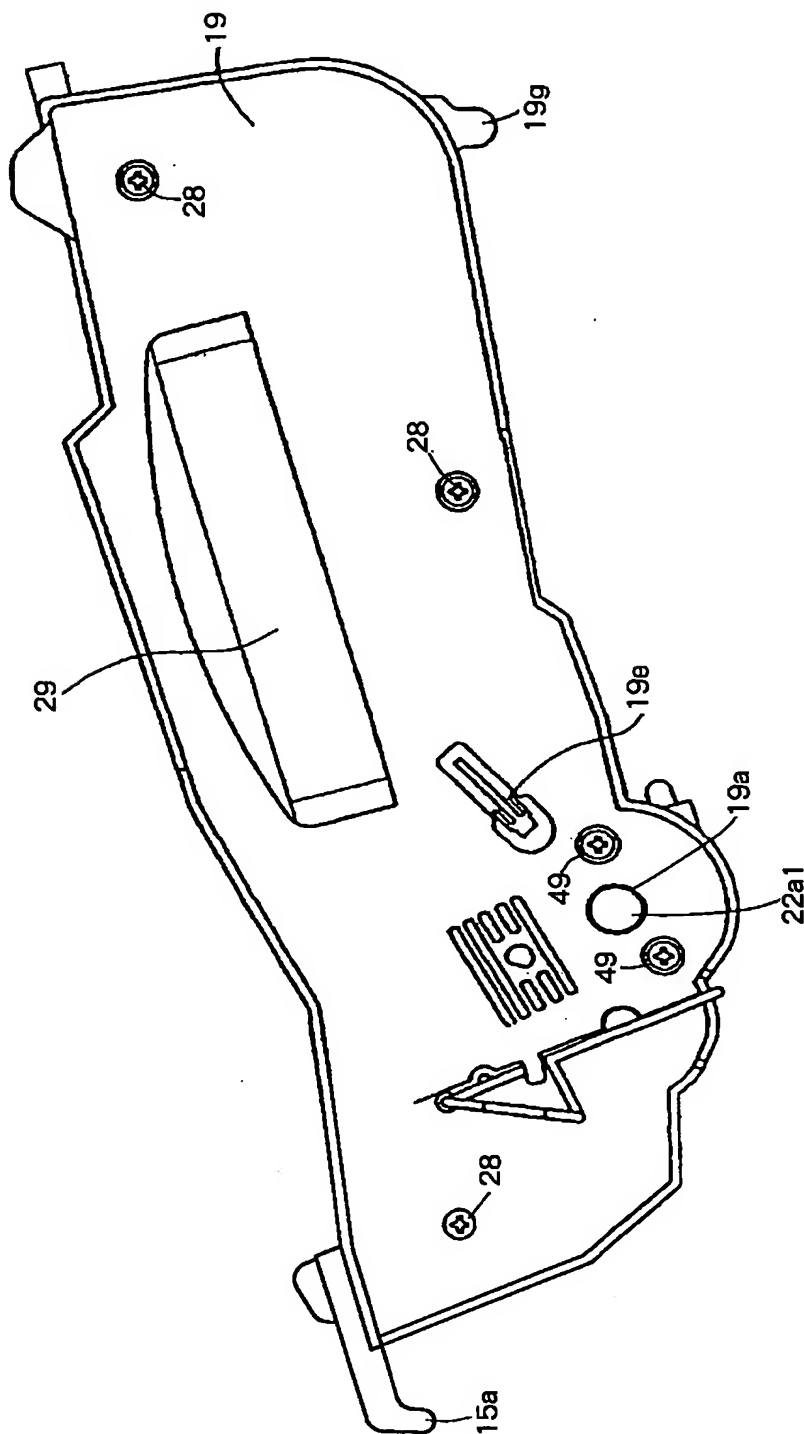


【図4】 Fig. 4

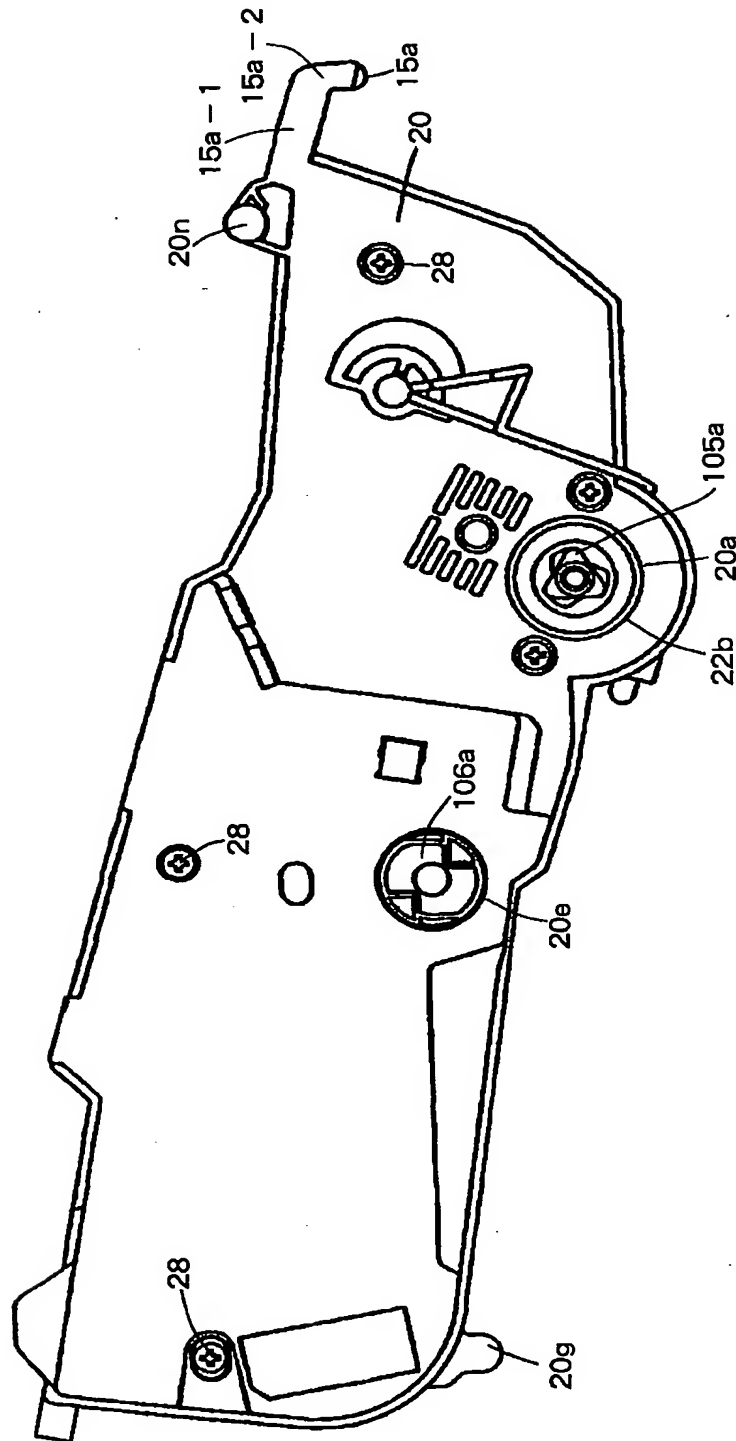

【図5】 Fig. 5

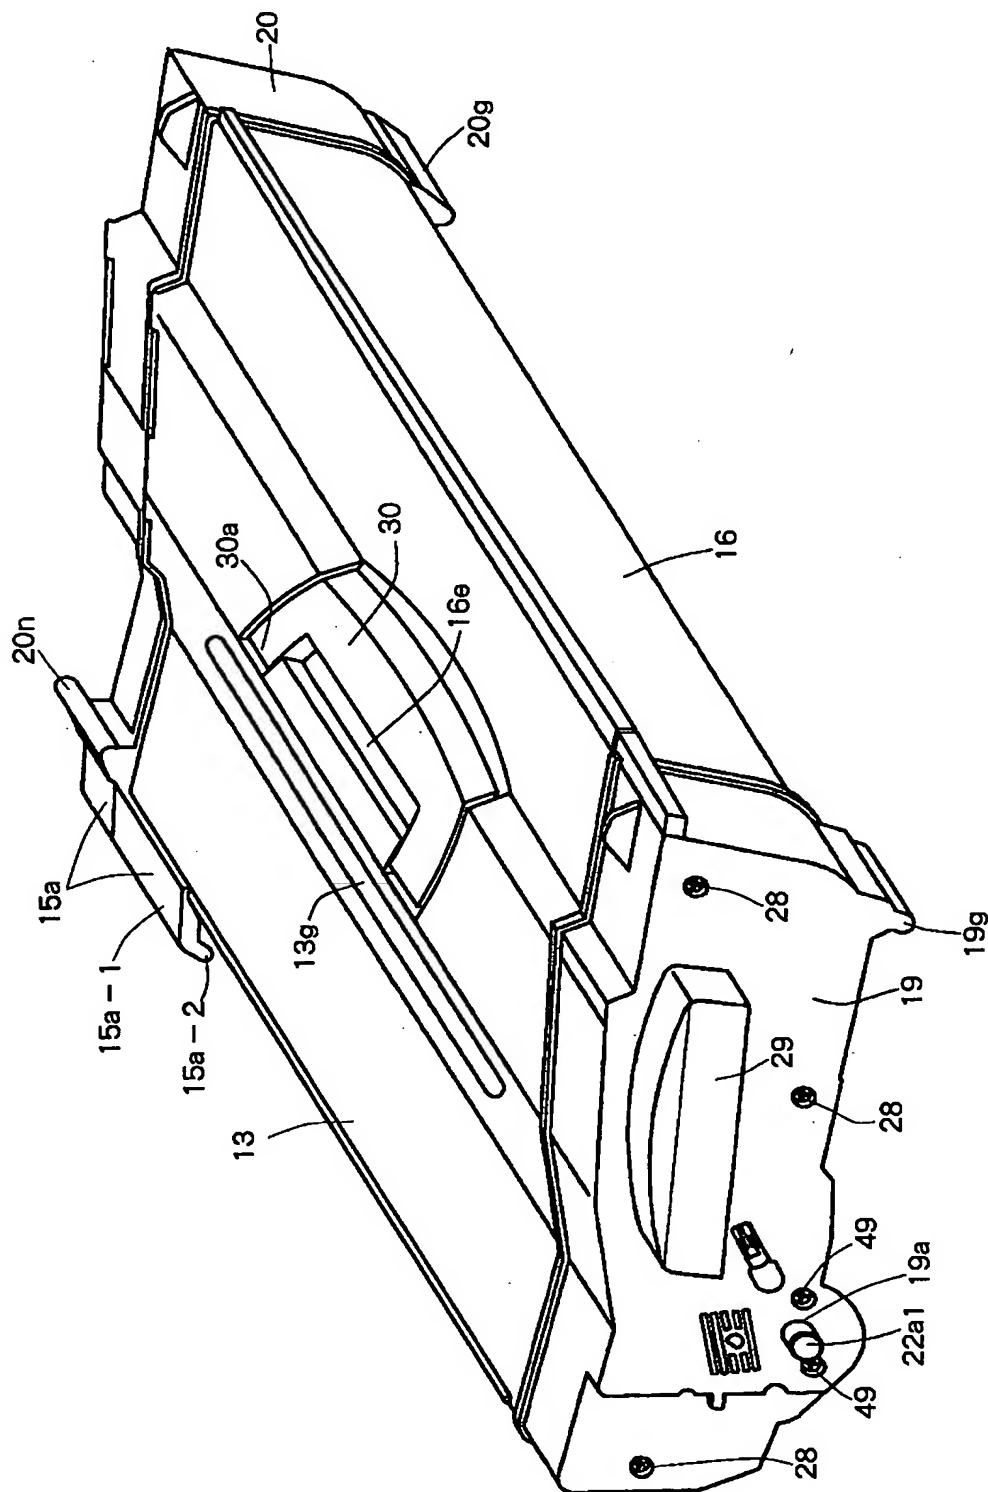


【図6】 Fig. 6

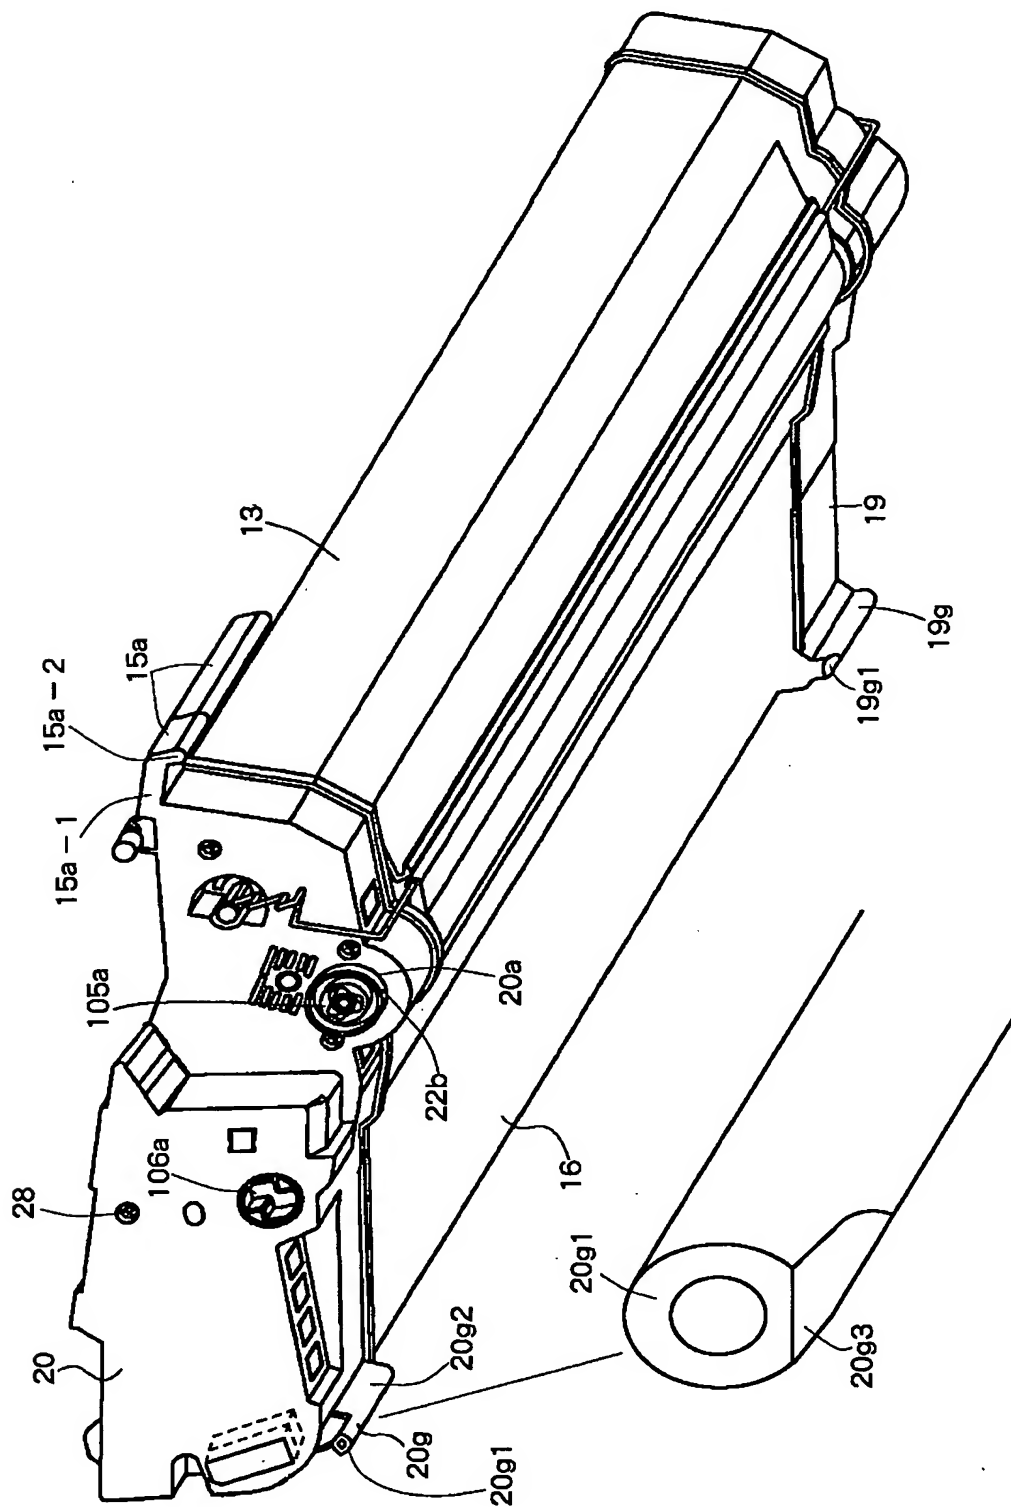


[illegible]


【図8】 Fig. 8

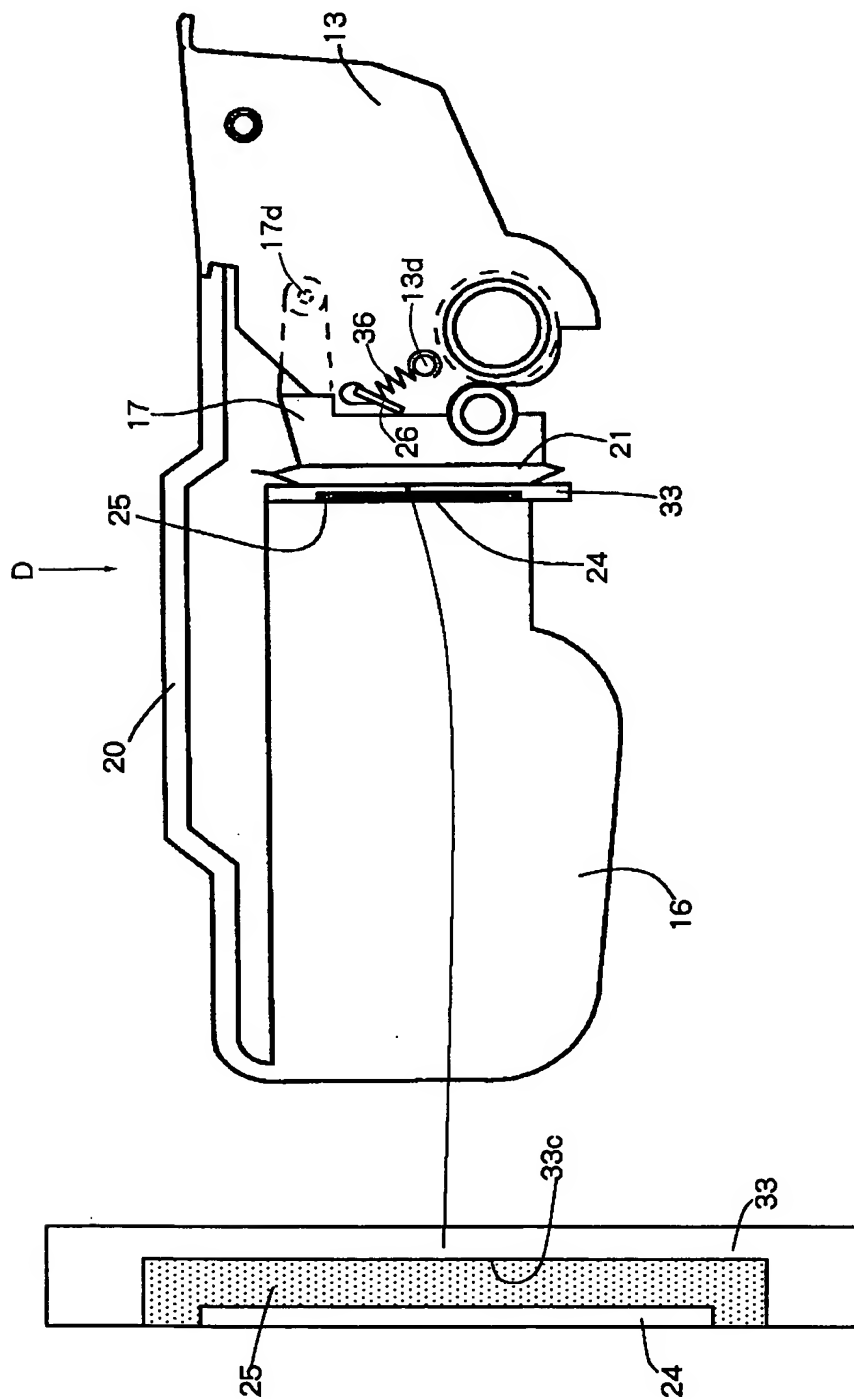


【図9】 Fig. 9

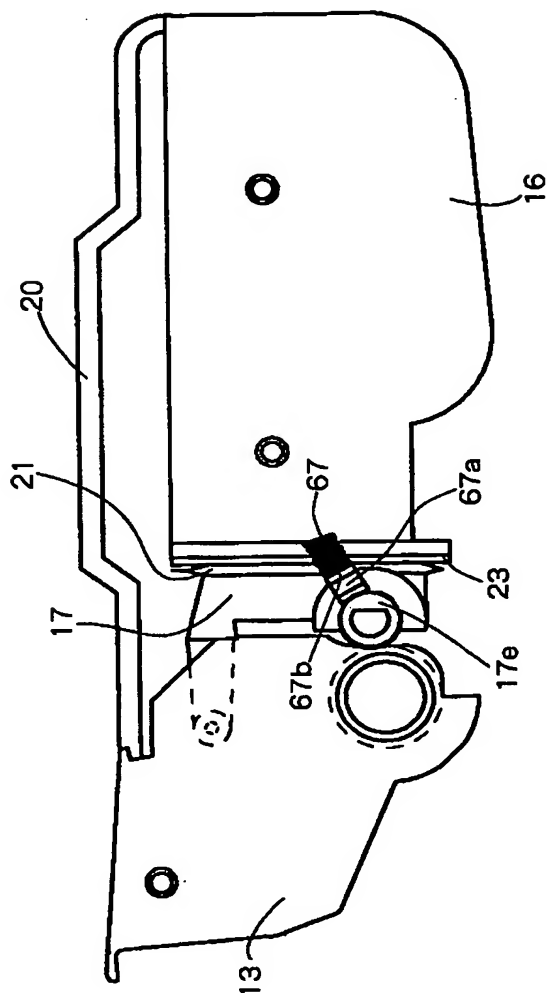


【図10】 Fig. 10

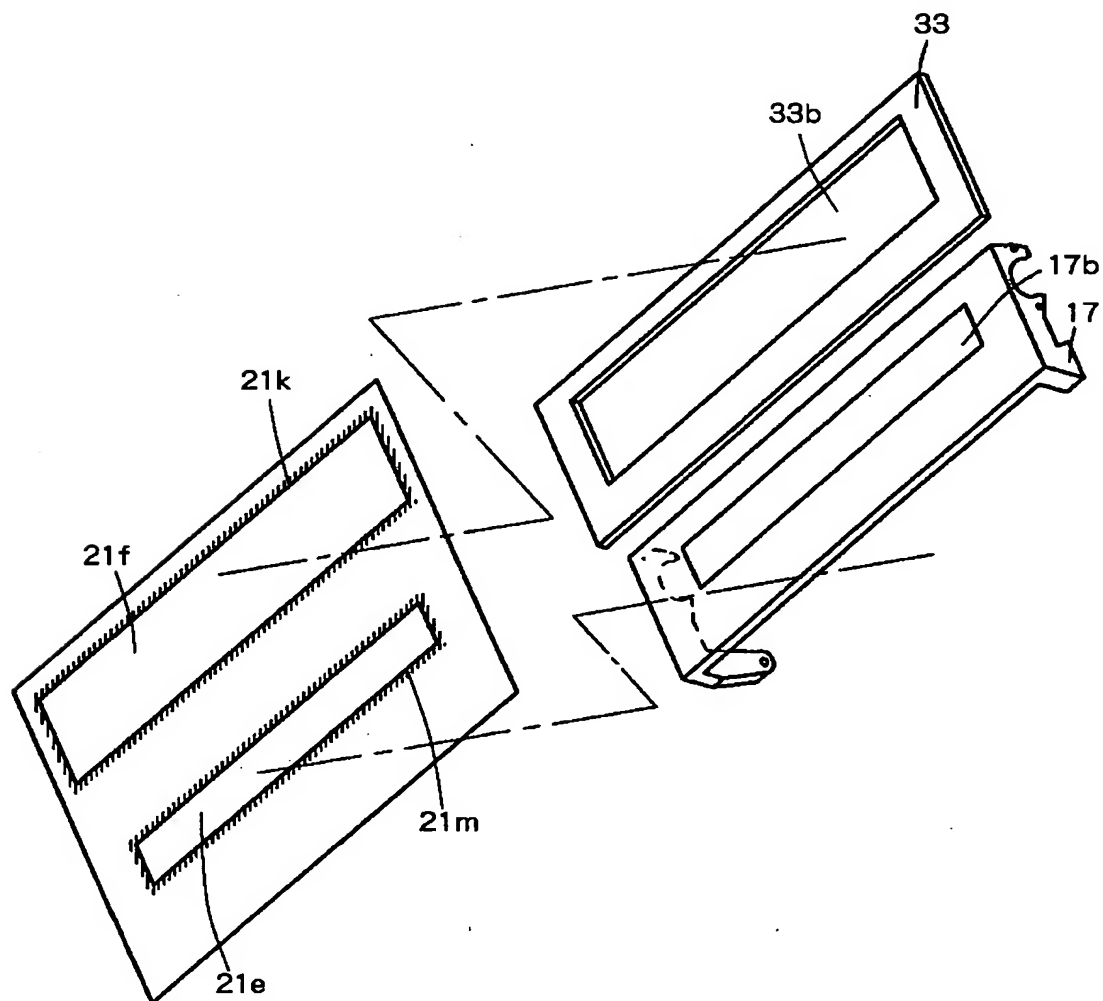


【図11】 Fig. 11

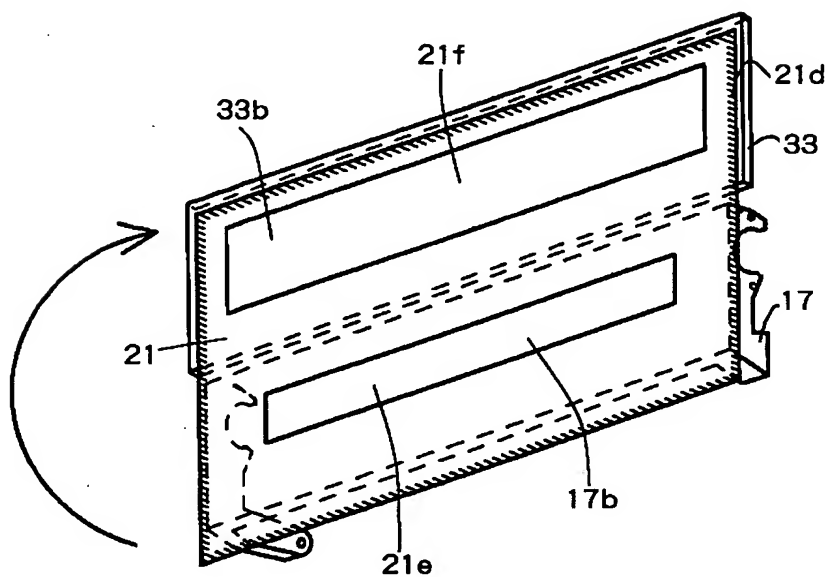


【図12】 Fig. 12

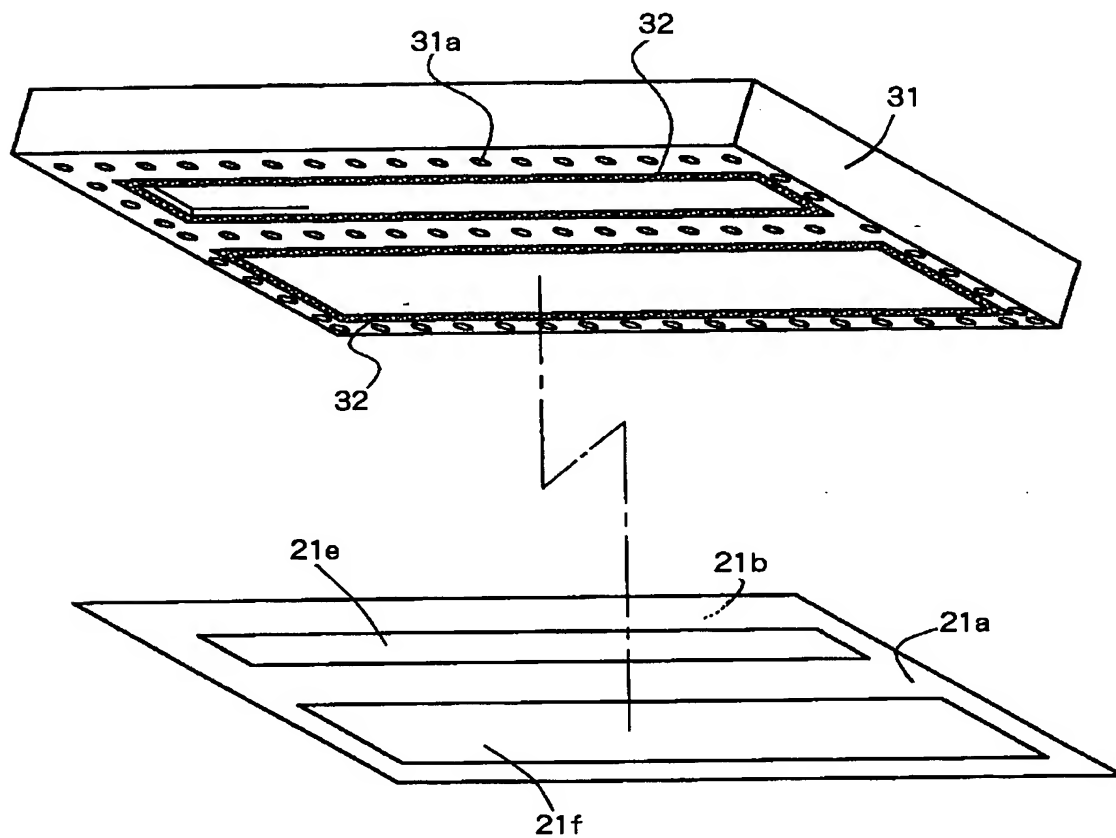


【図13】 Fig. 13

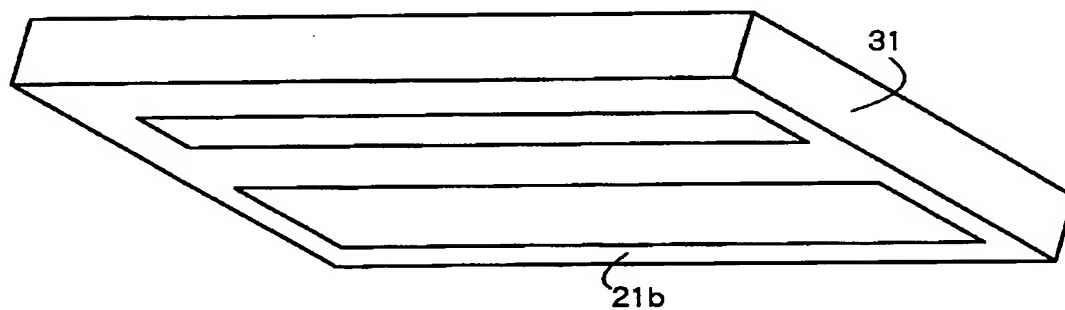


【図14】 Fig. 14

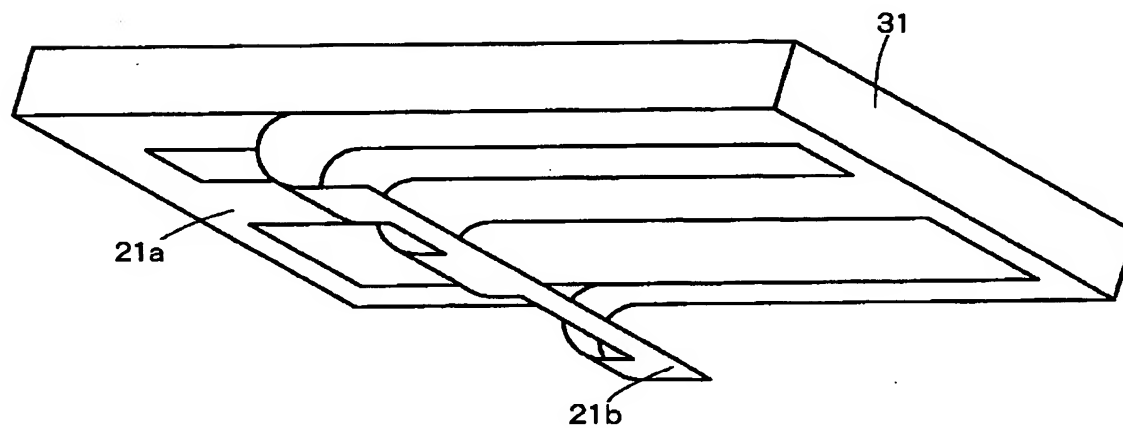


【図15】 Fig. 15

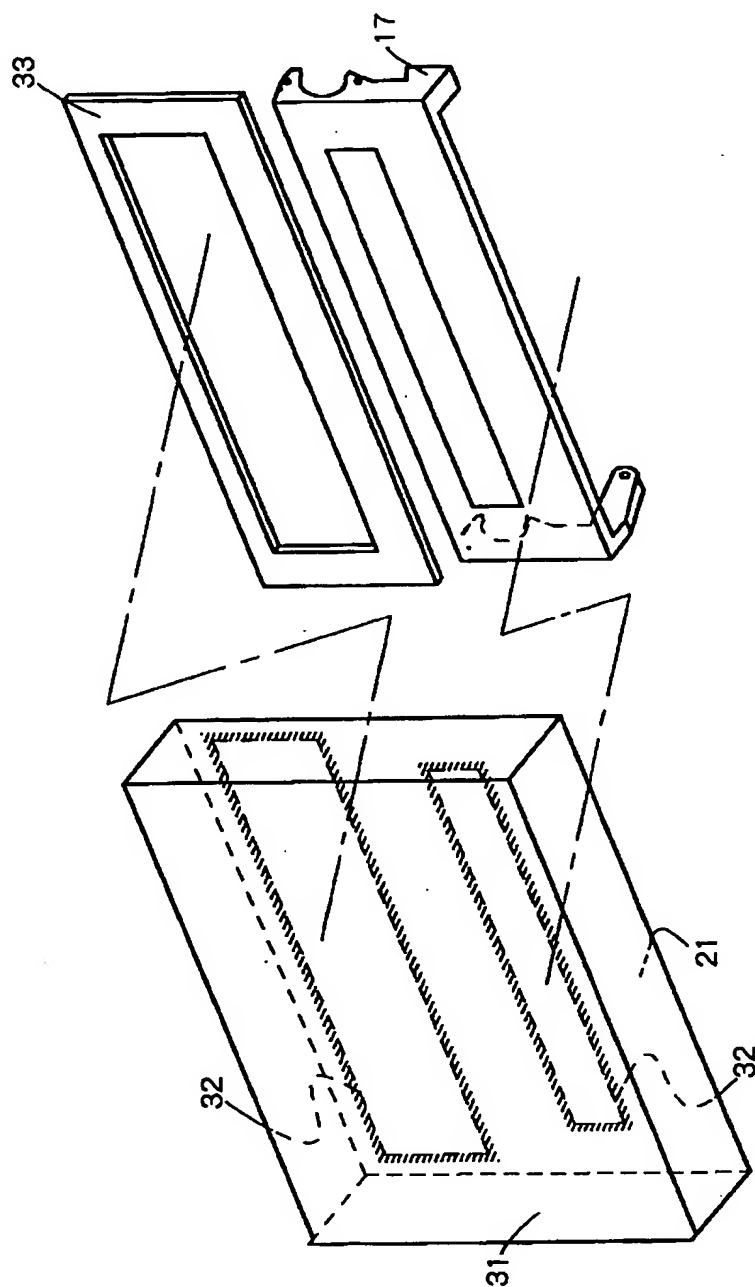


【図16】 Fig. 16

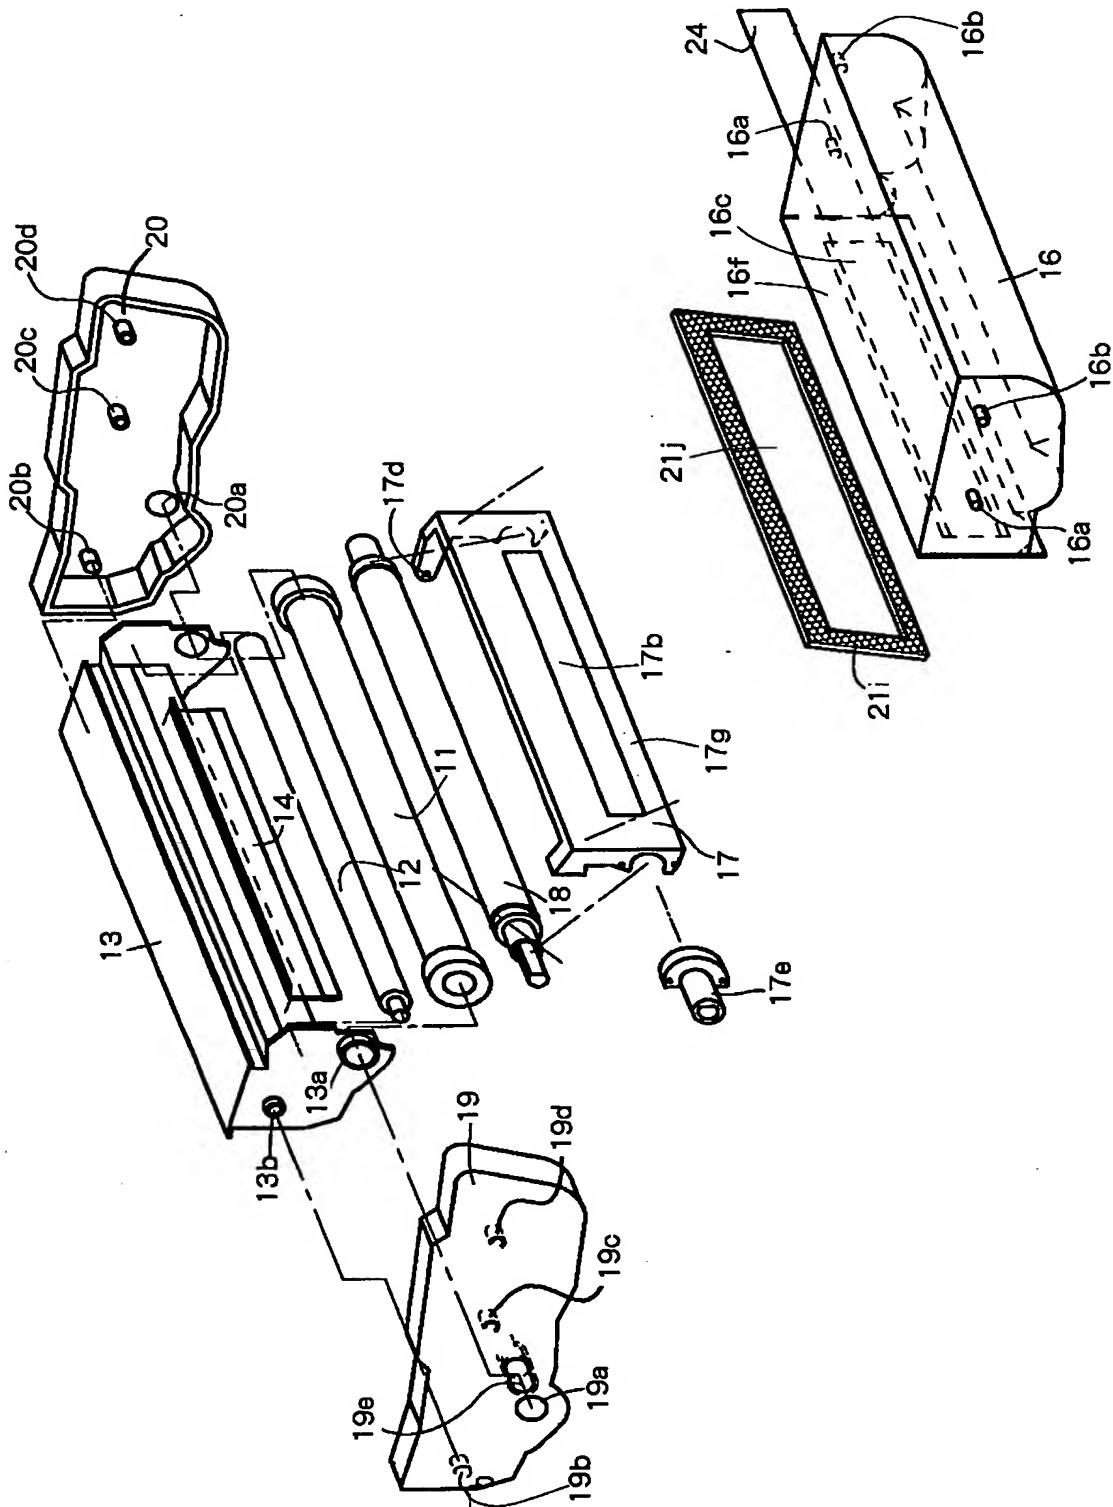


【図17】 Fig. 17

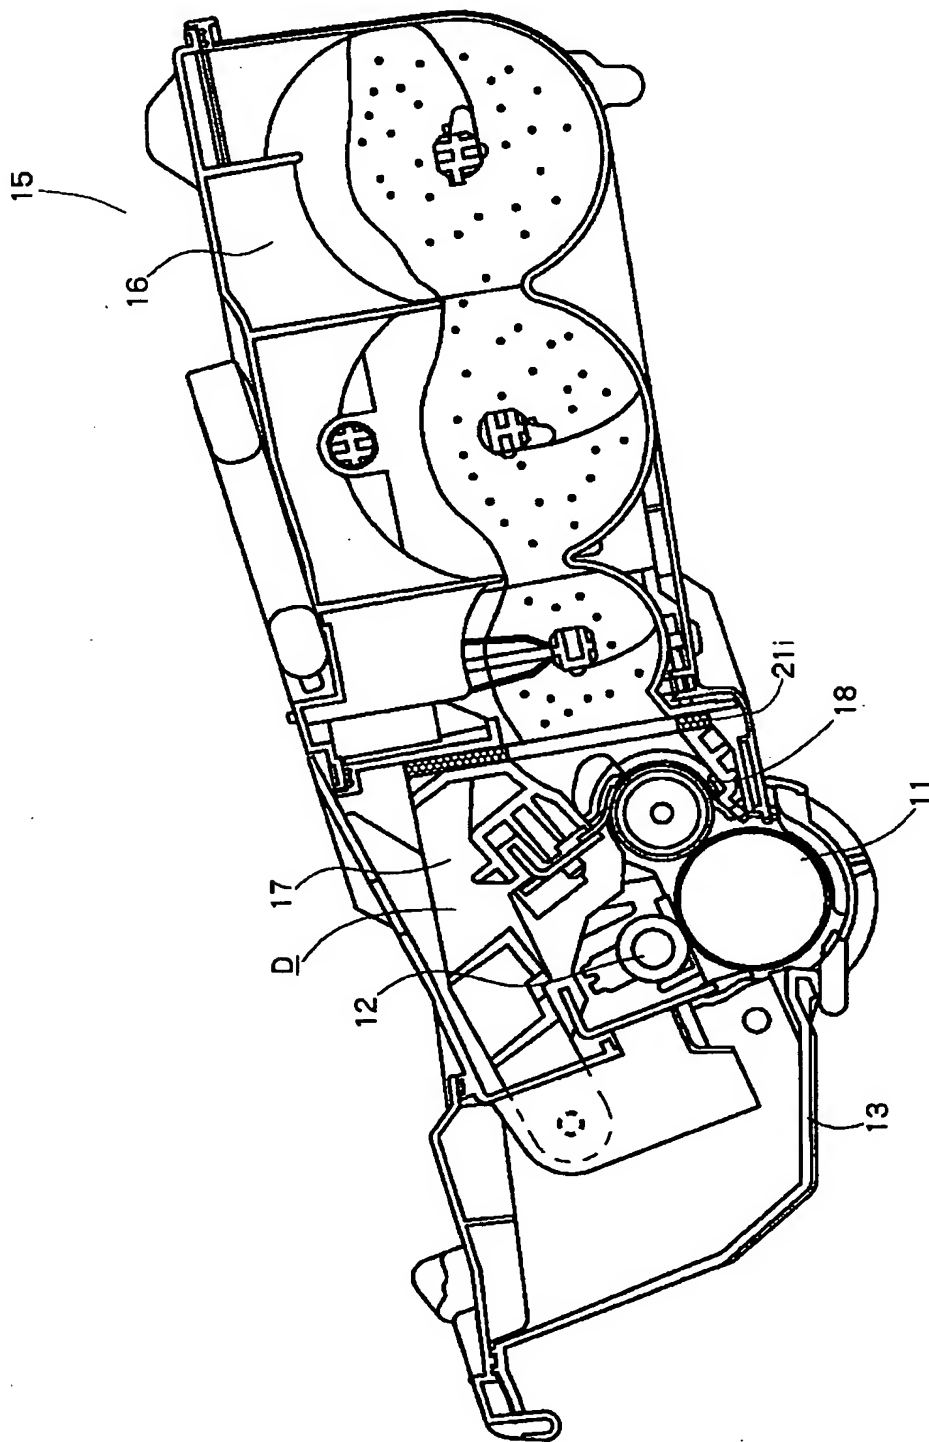


【図19】 Fig. 19

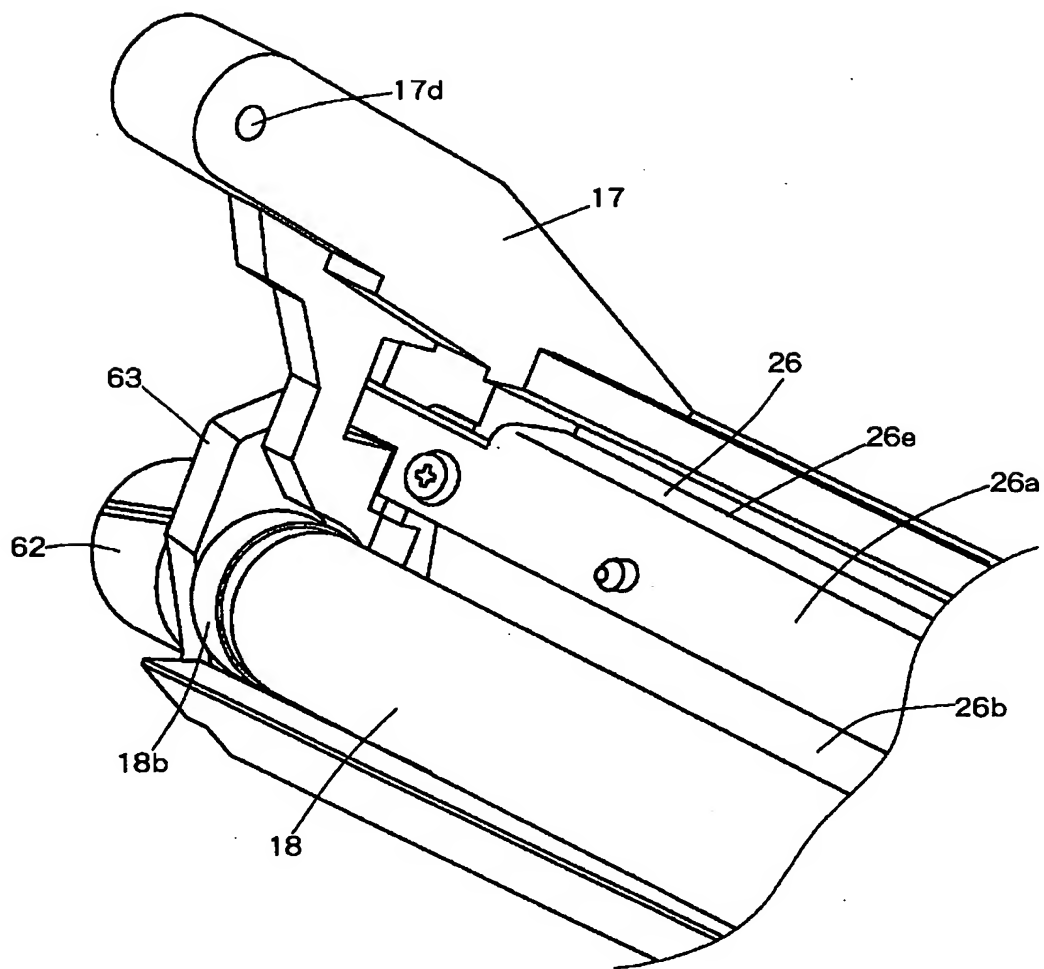


【图 20】 Fig. 20

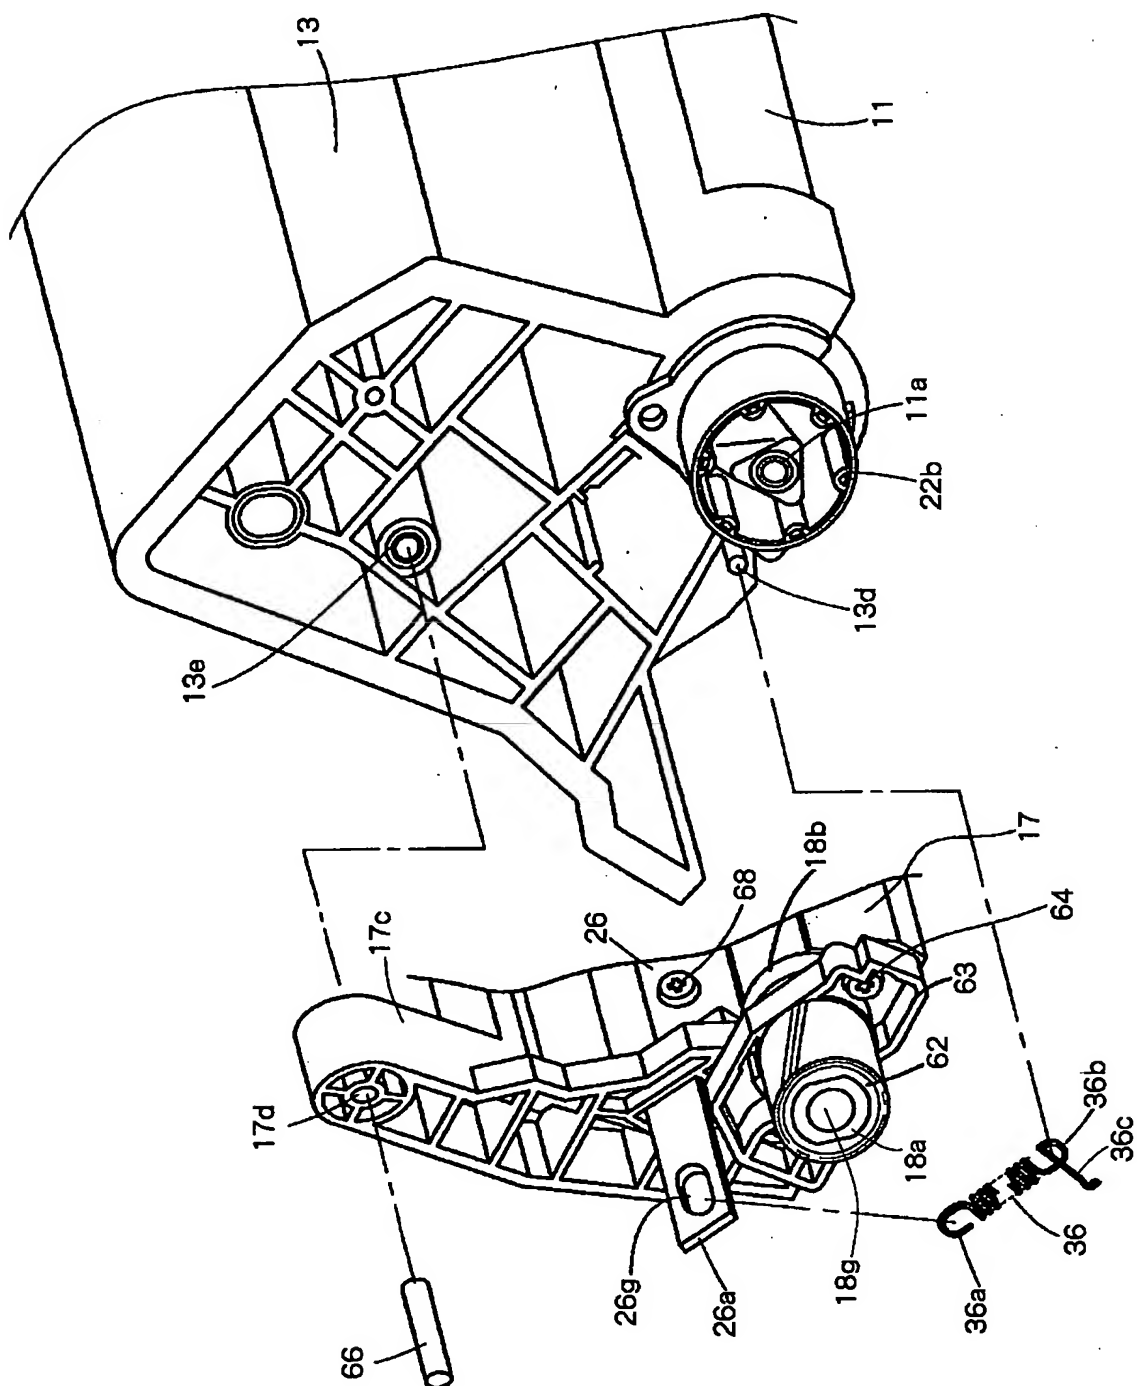


【図21】 Fig. 21

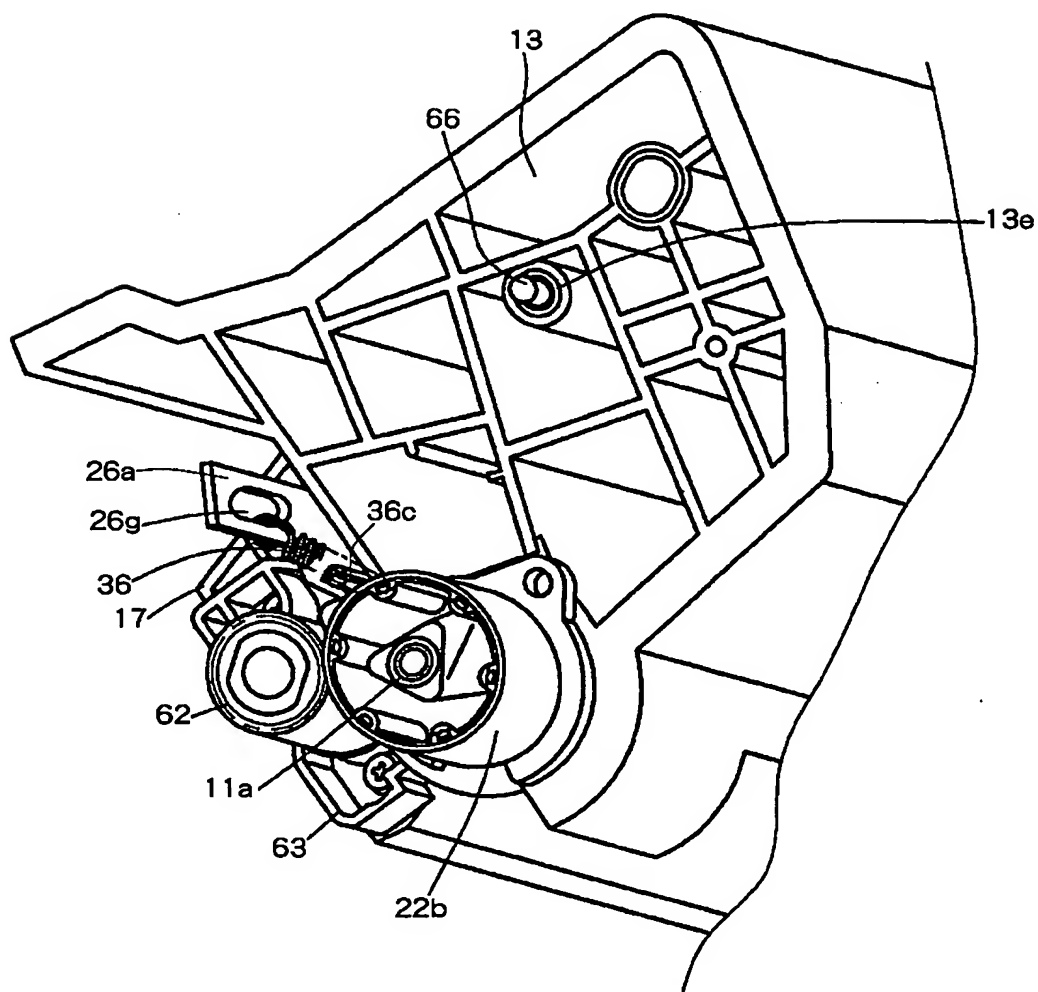


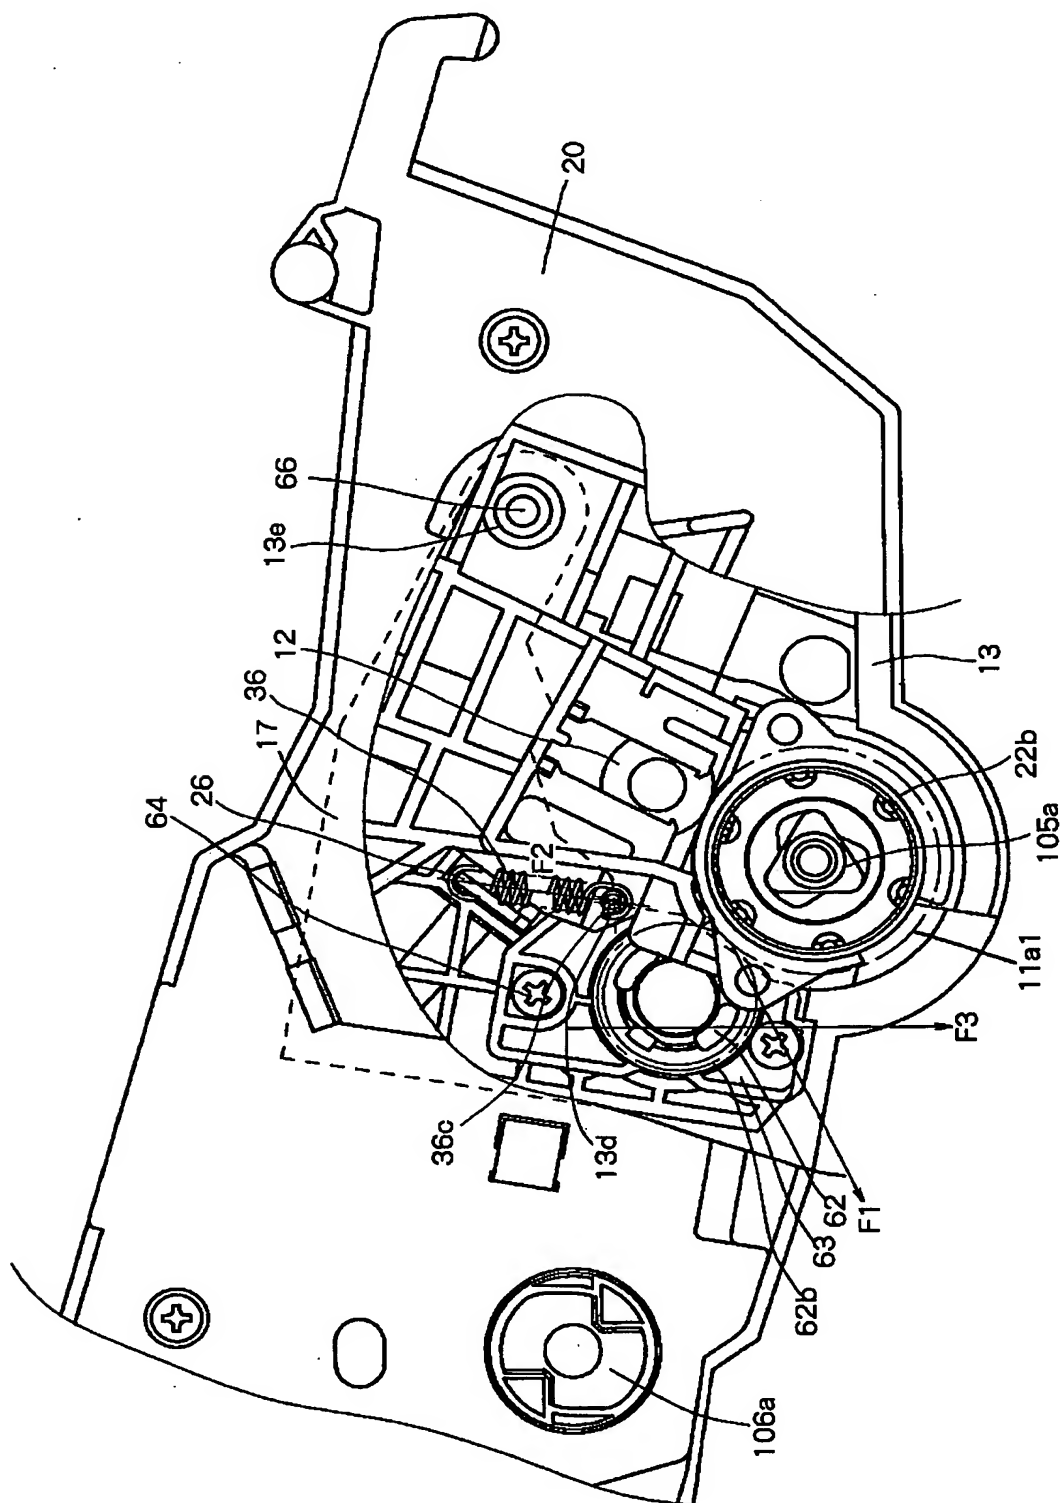


【図 23】 Fig. 23

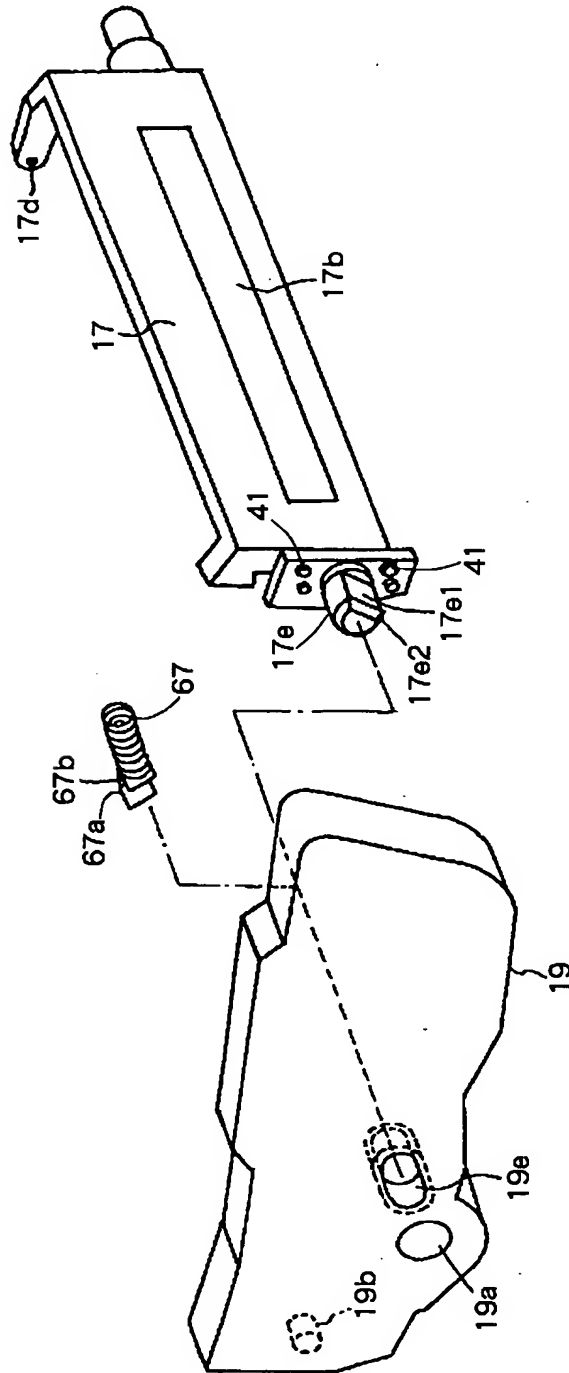


【図24】 Fig. 24

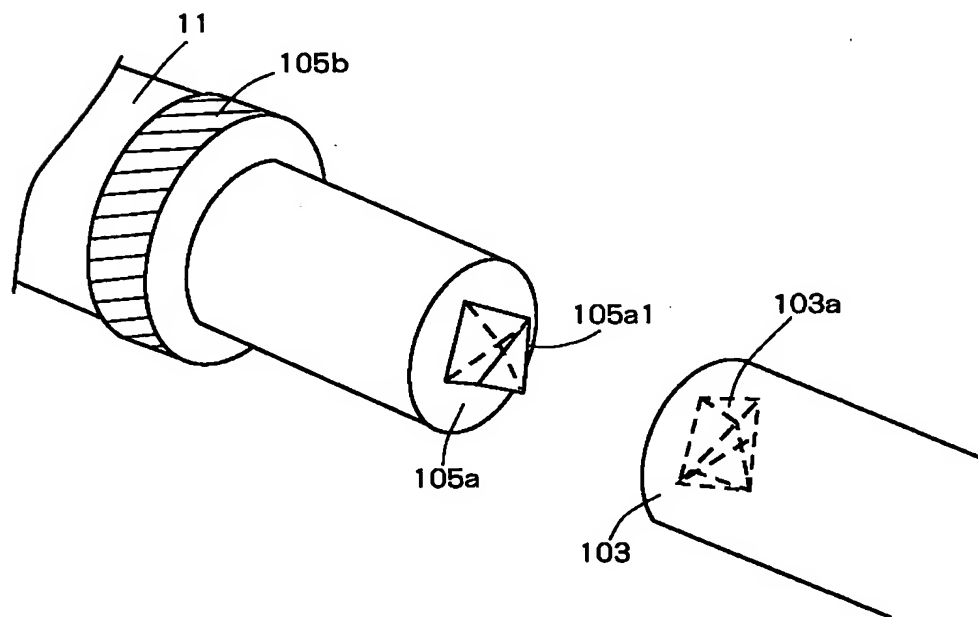


【図 2 5】 Fig. 25

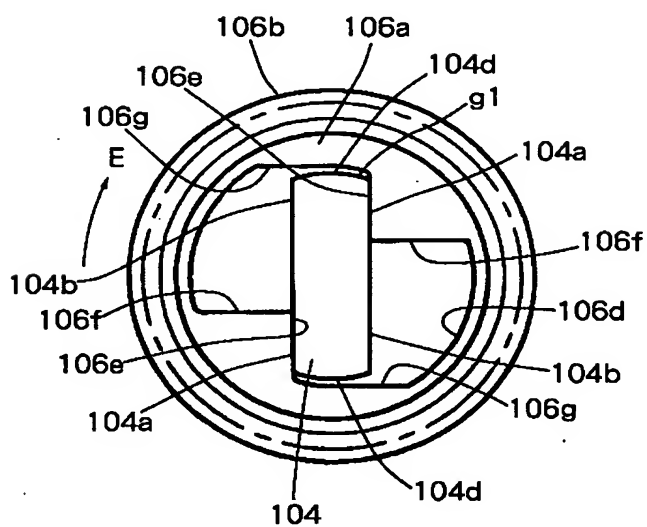


【図 26】 Fig. 26

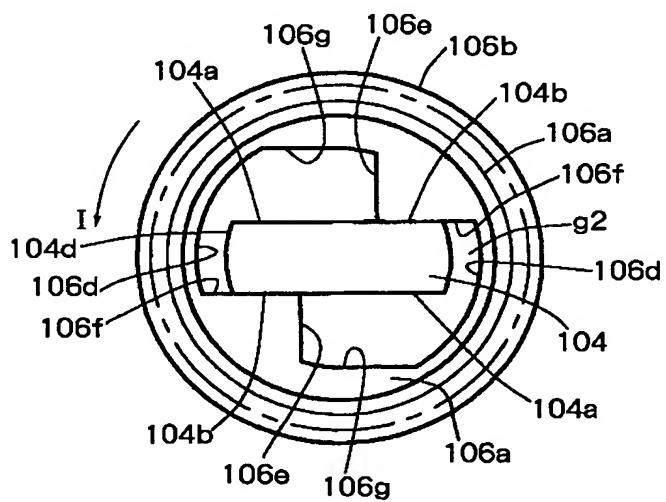


【図27】 Fig. 27

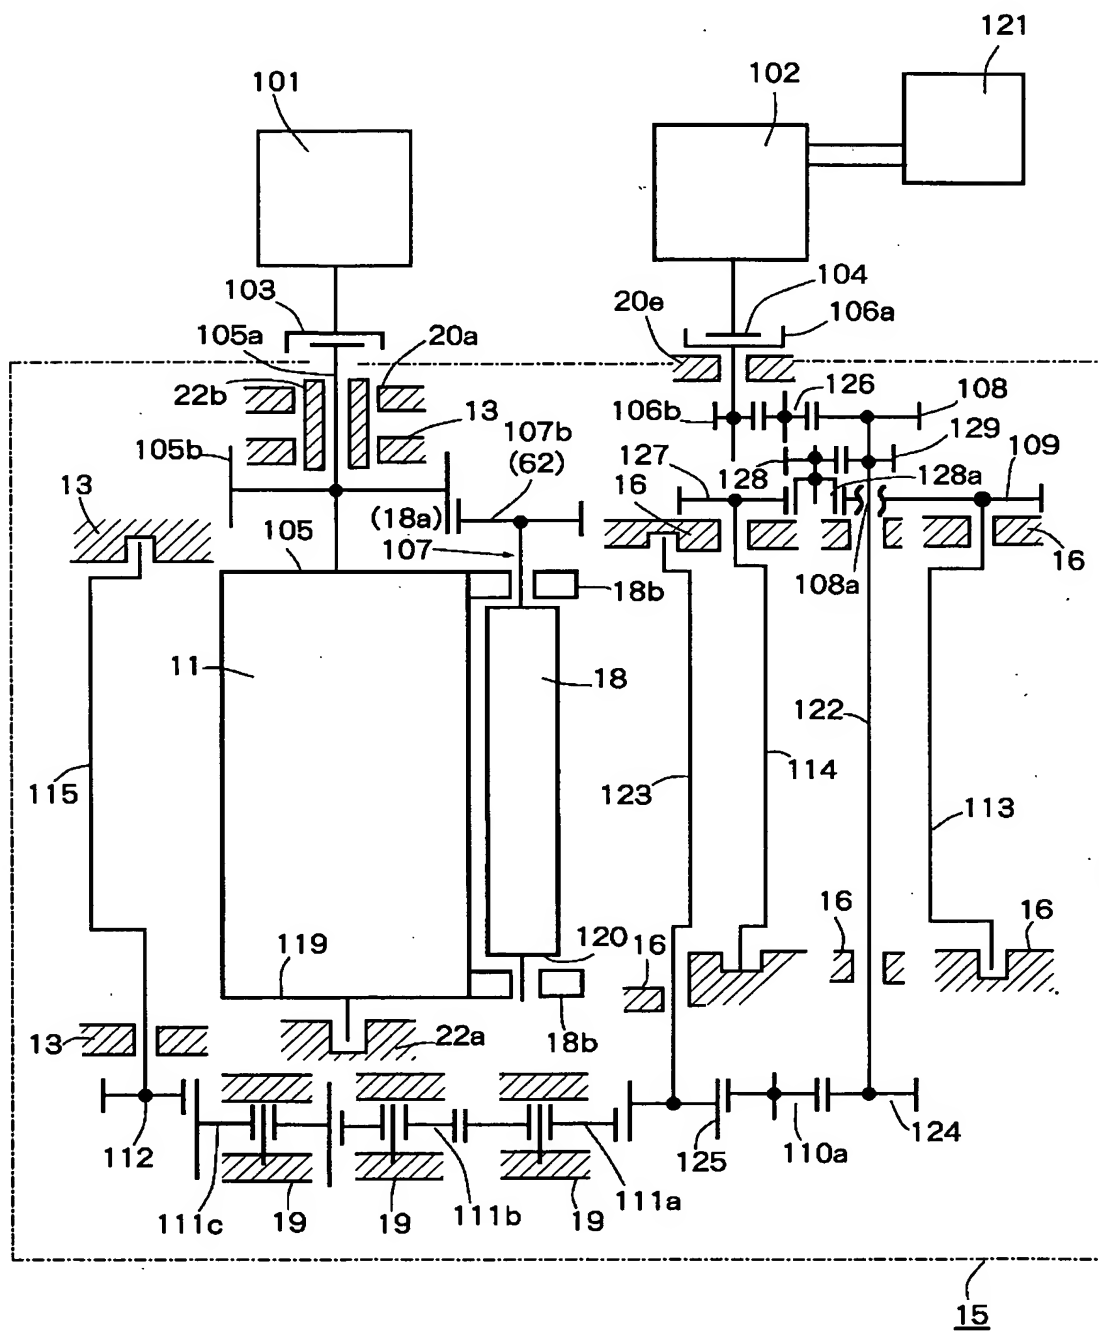


【図28】 Fig. 28

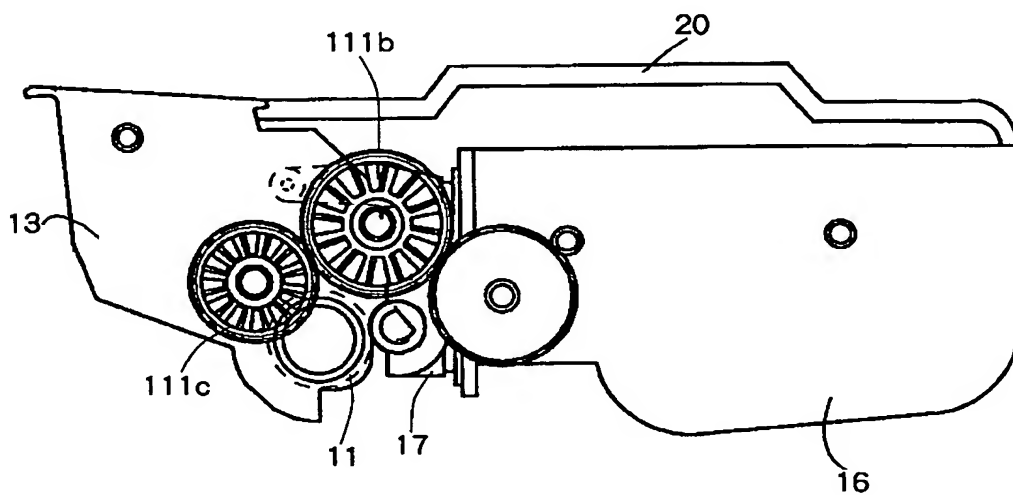


【図29】 Fig. 29

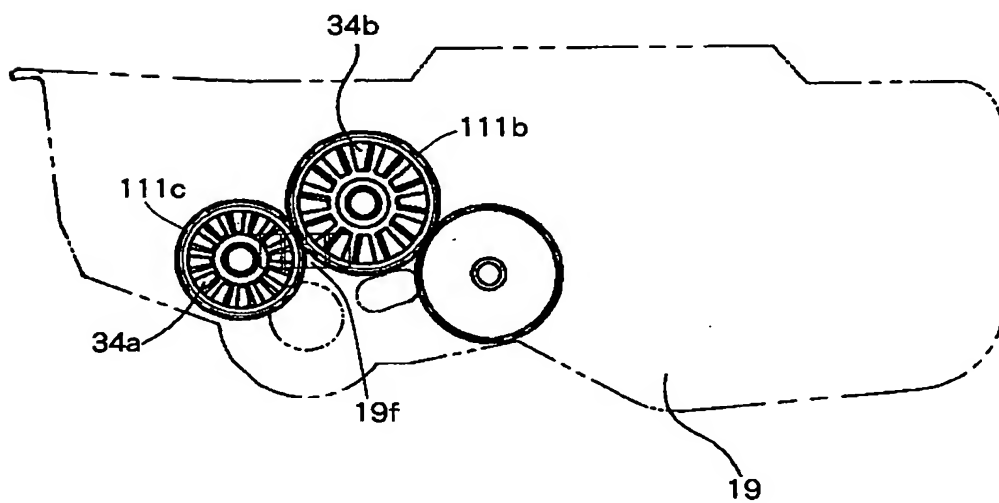


【図30】 Fig. 30

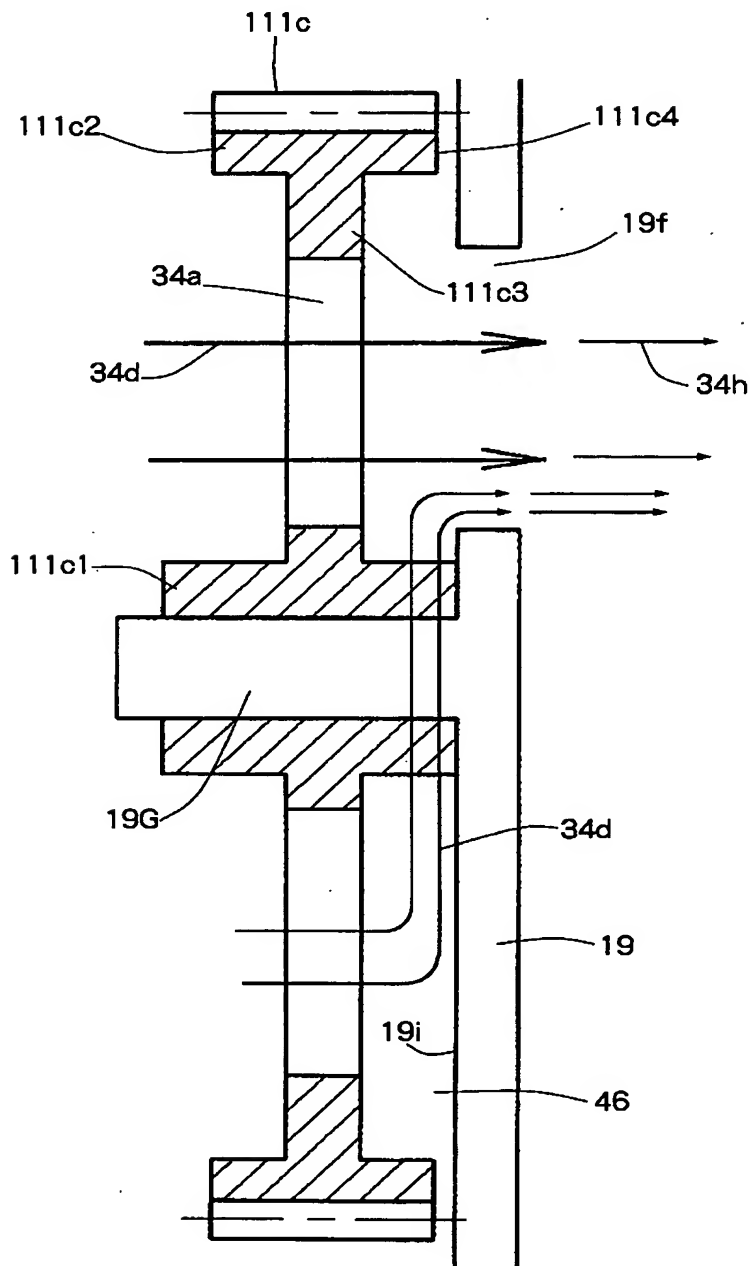


【図31】 Fig. 31

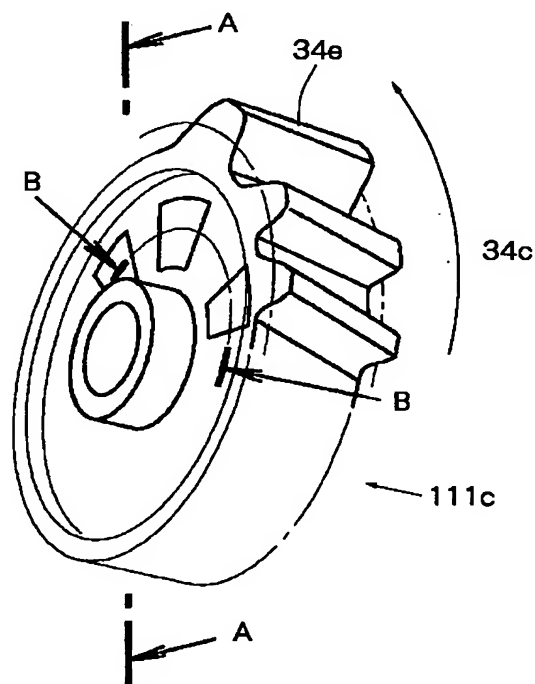


【図 3 2】 Fig. 32

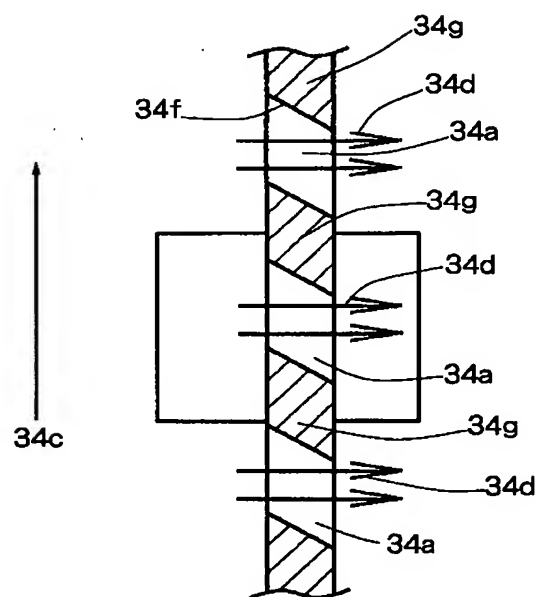


【図33】 Fig. 33

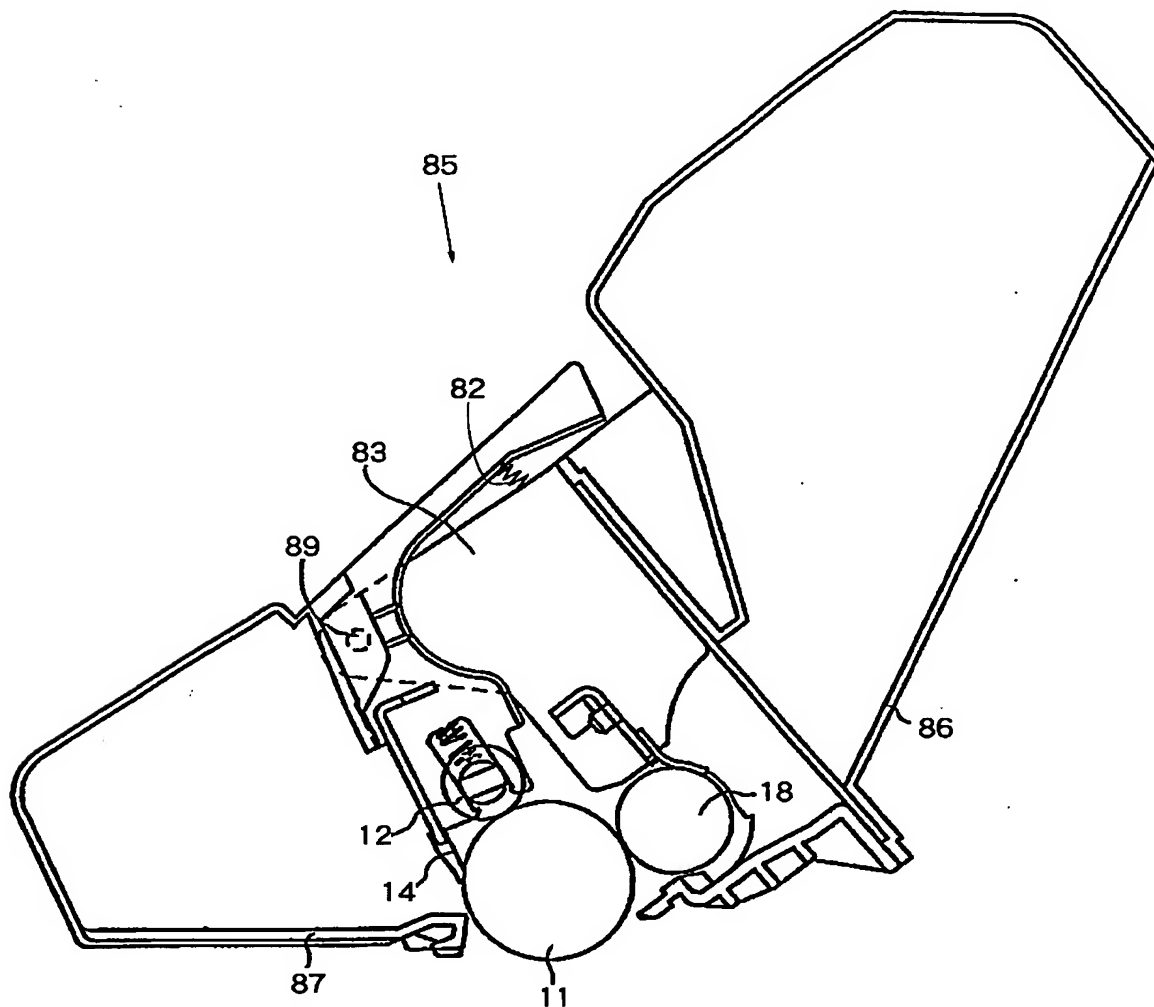


【図35】 Fig. 35

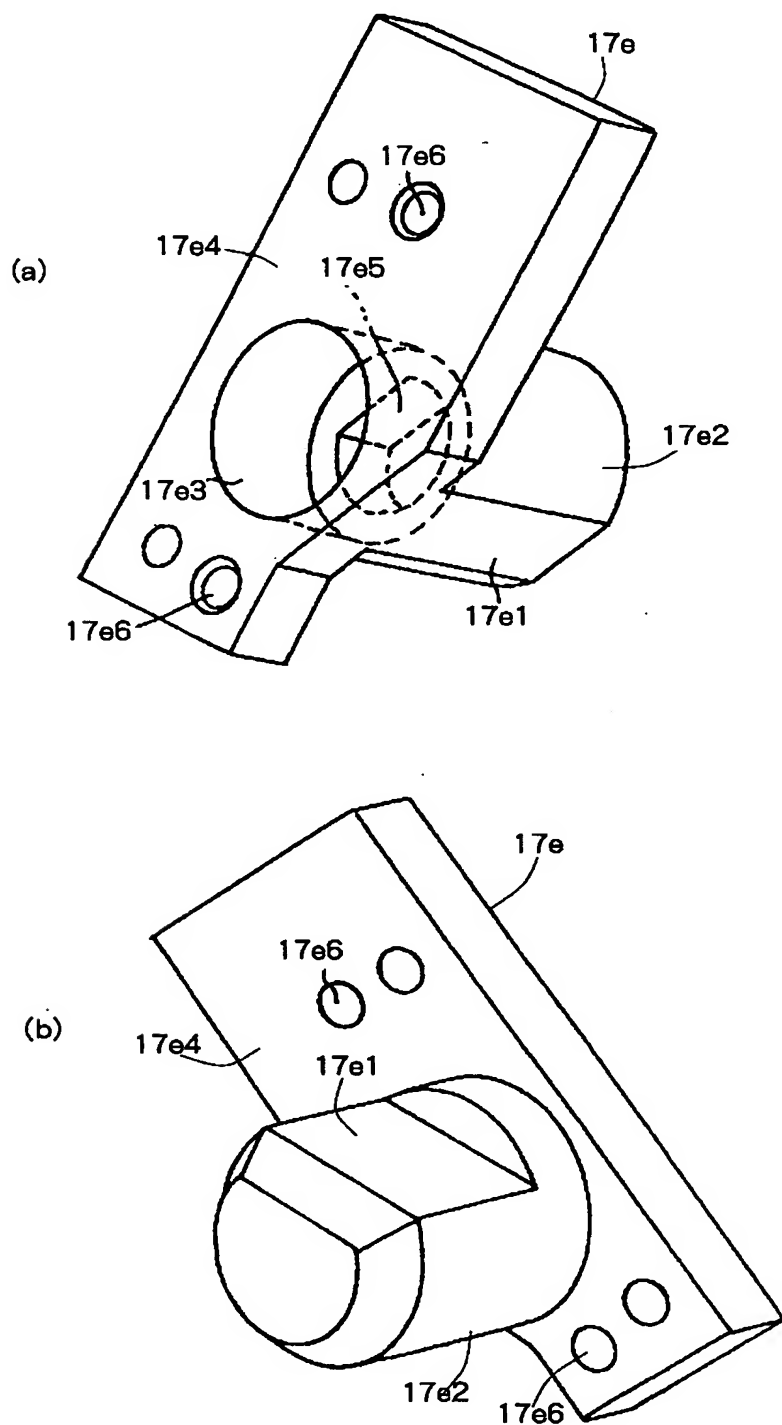


【図36】 Fig. 36

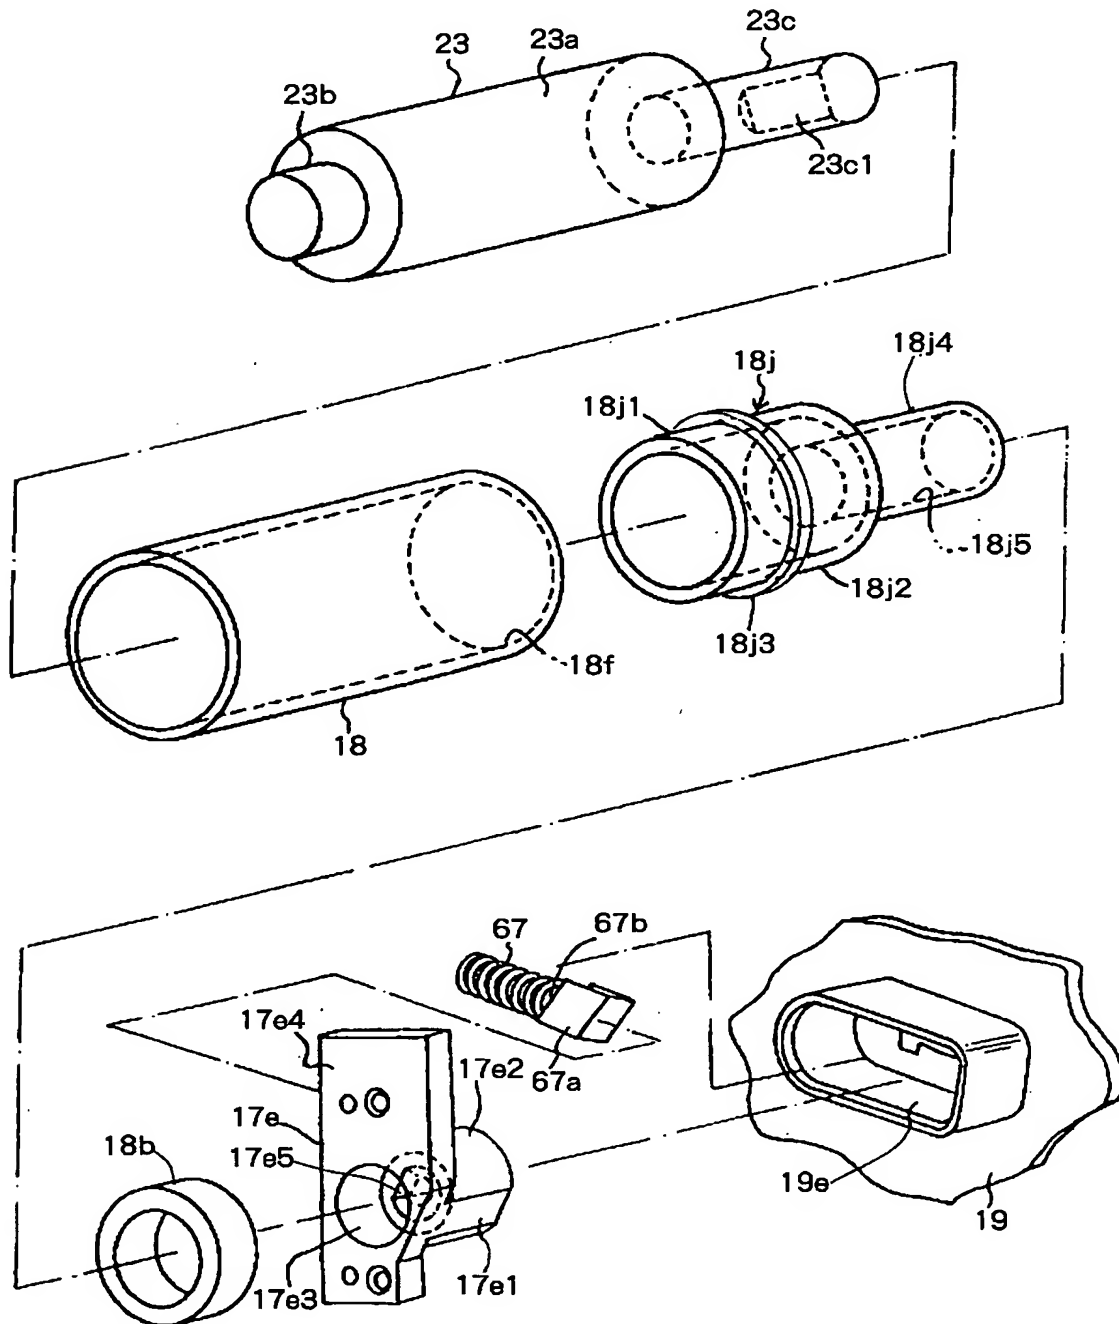


【図37】 Fig. 37

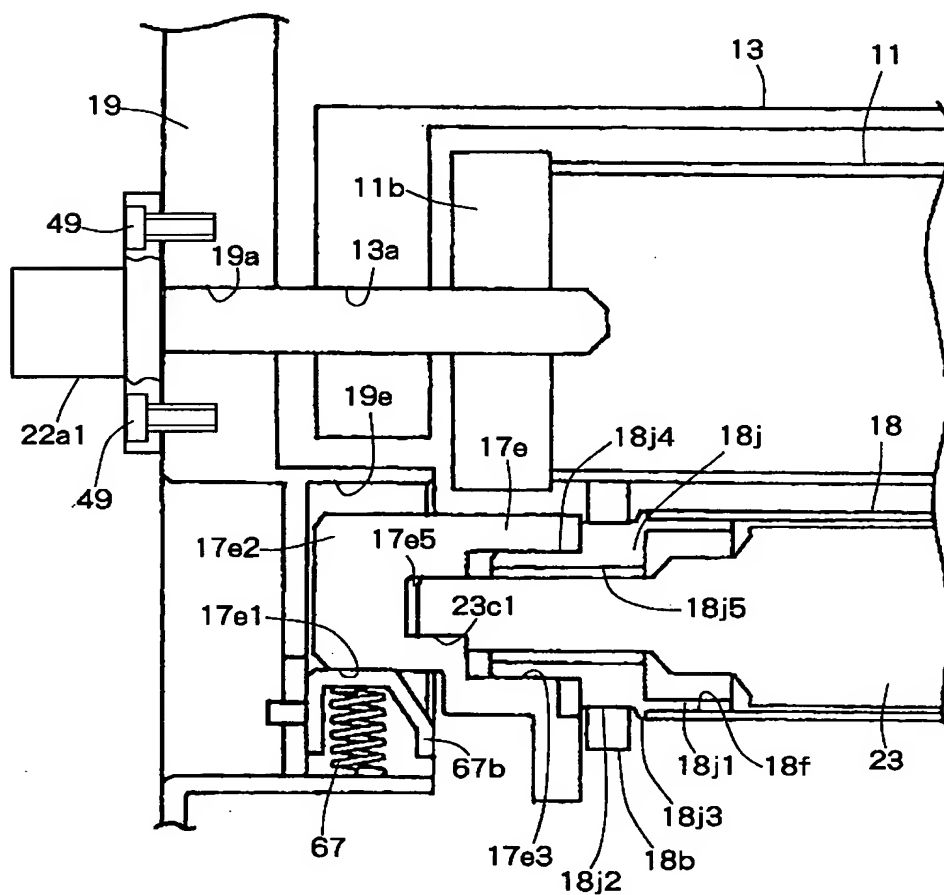


【図38】 Fig. 38

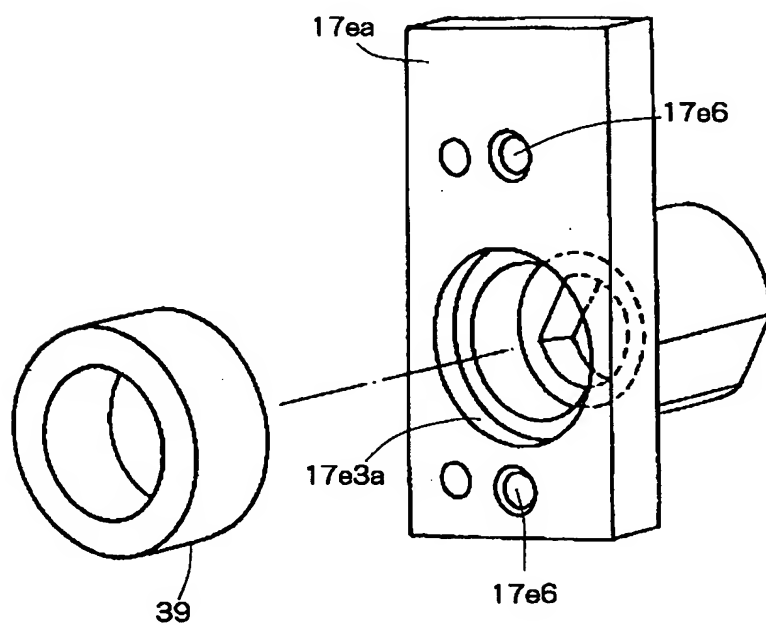


【図39】 Fig. 39

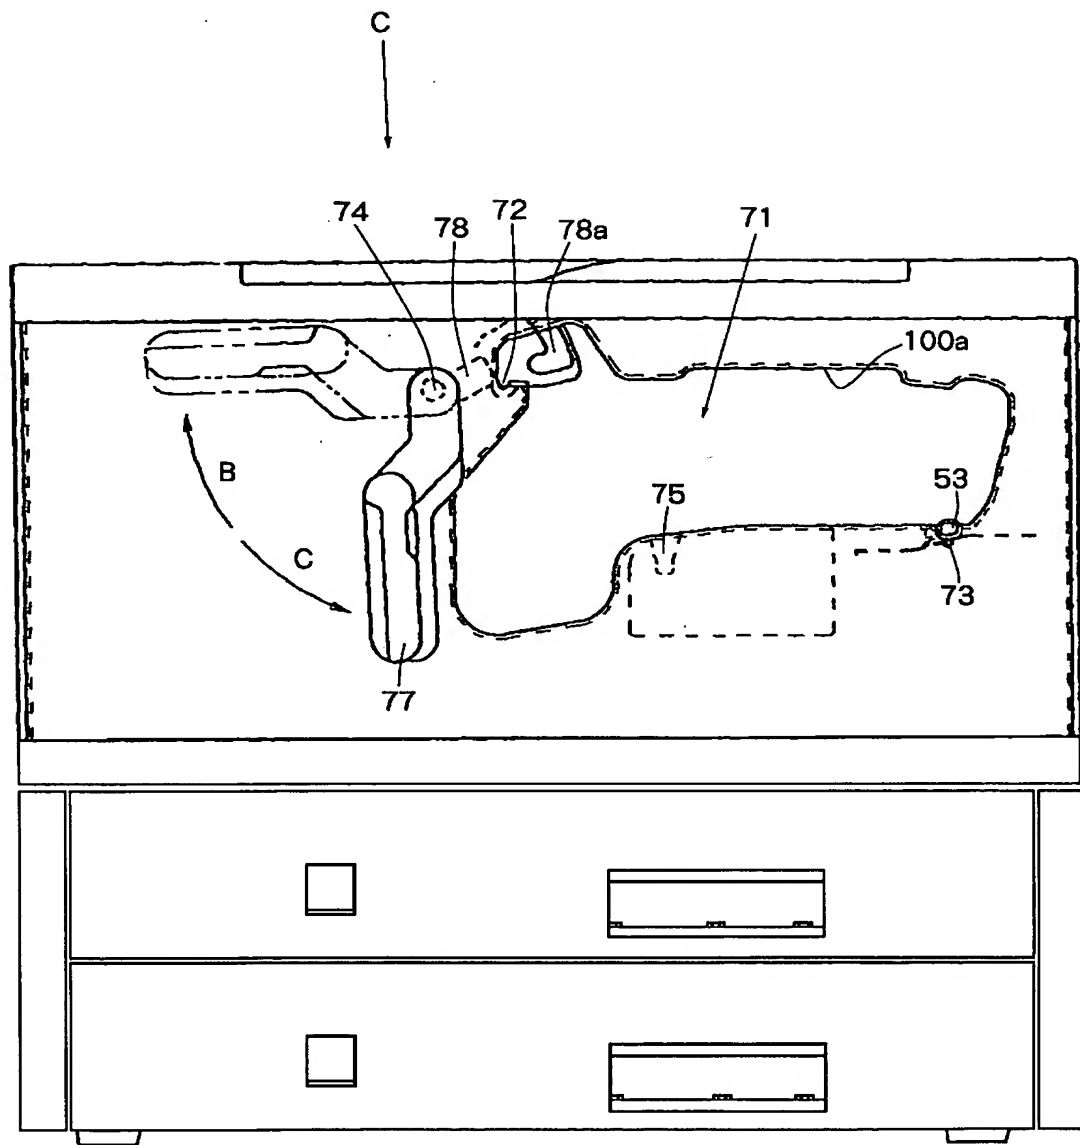


【図40】 Fig. 40

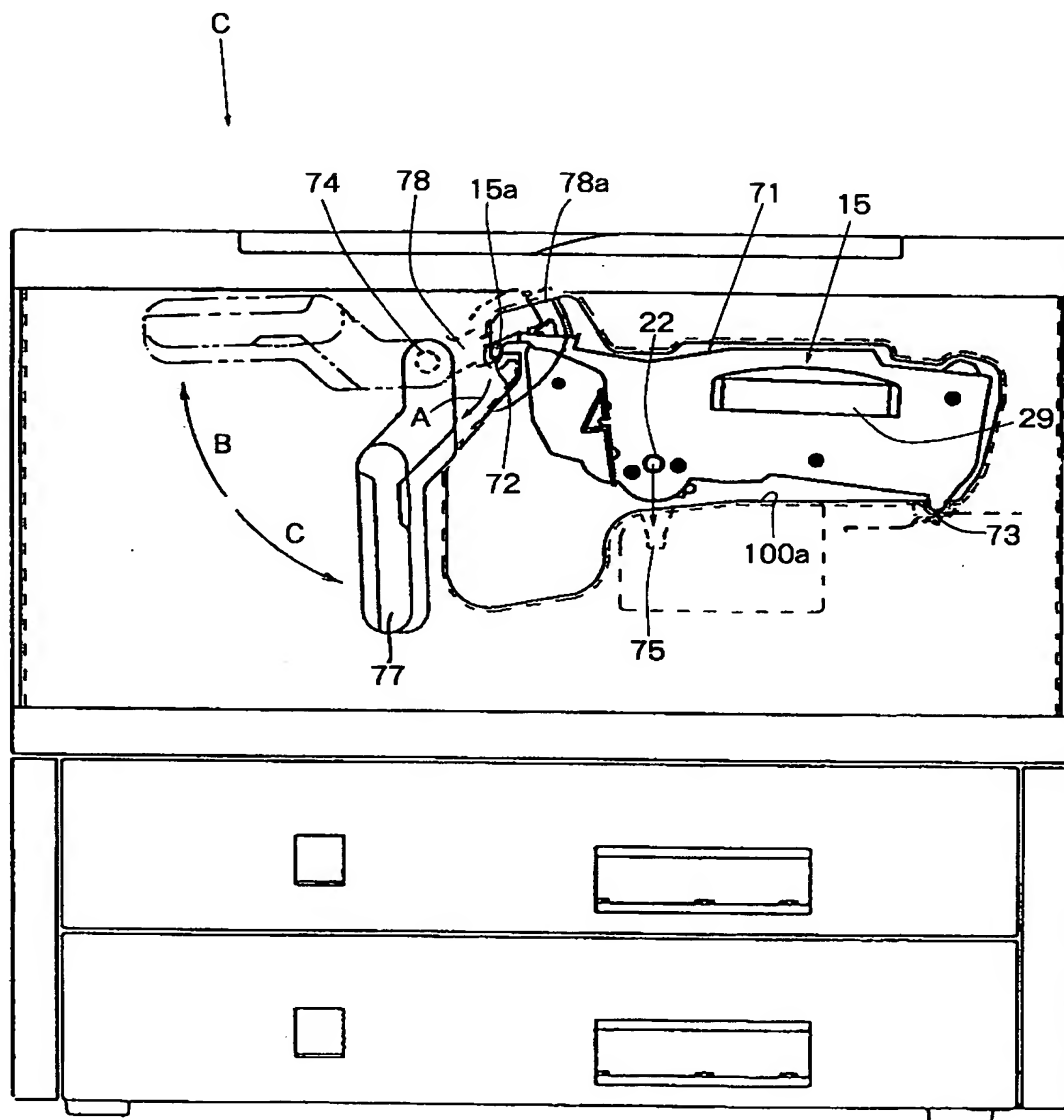


【図41】 Fig. 41

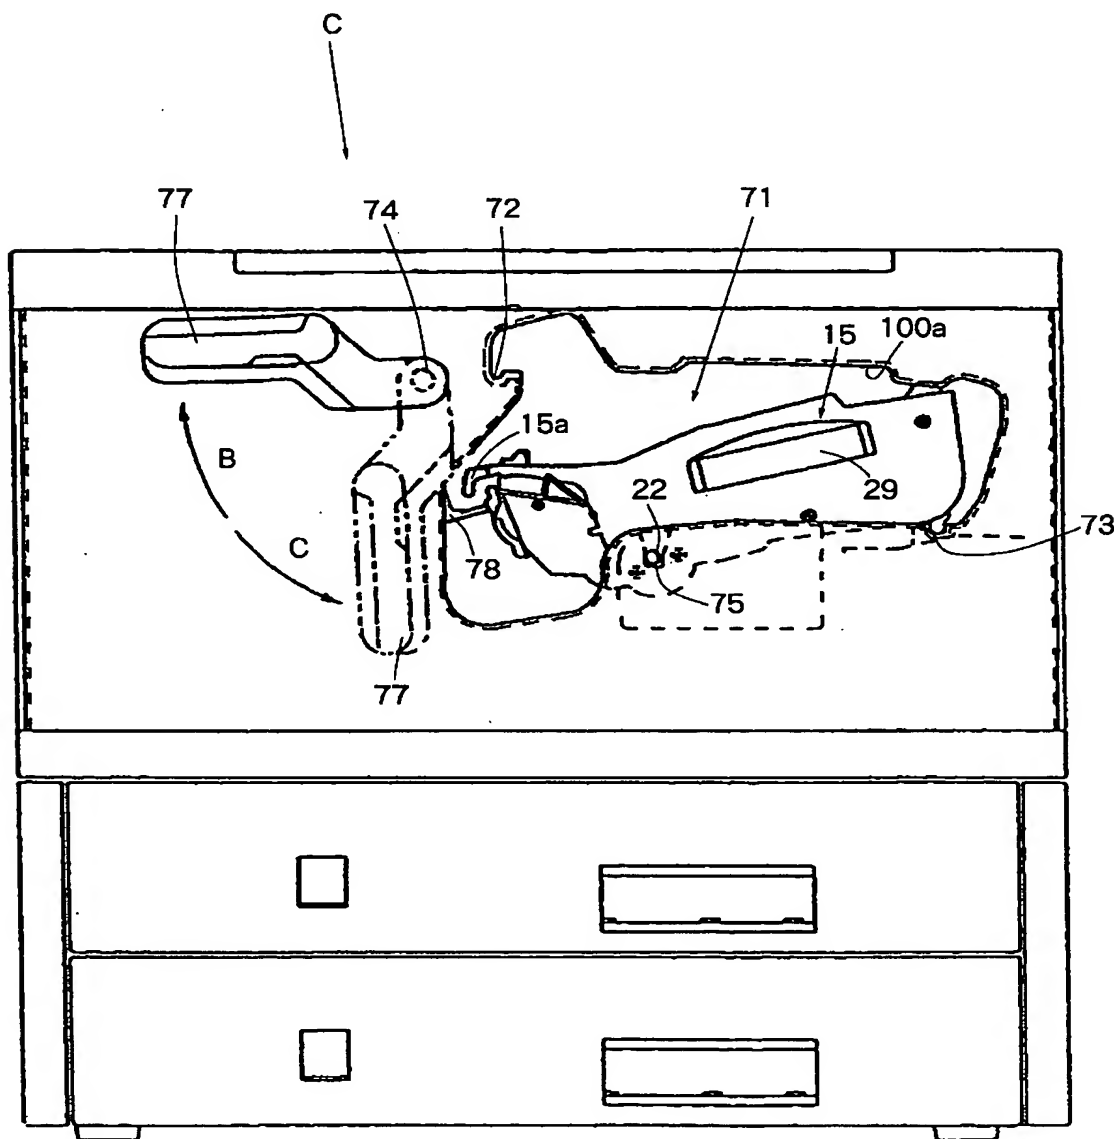


【図 4 2】 Fig. 42

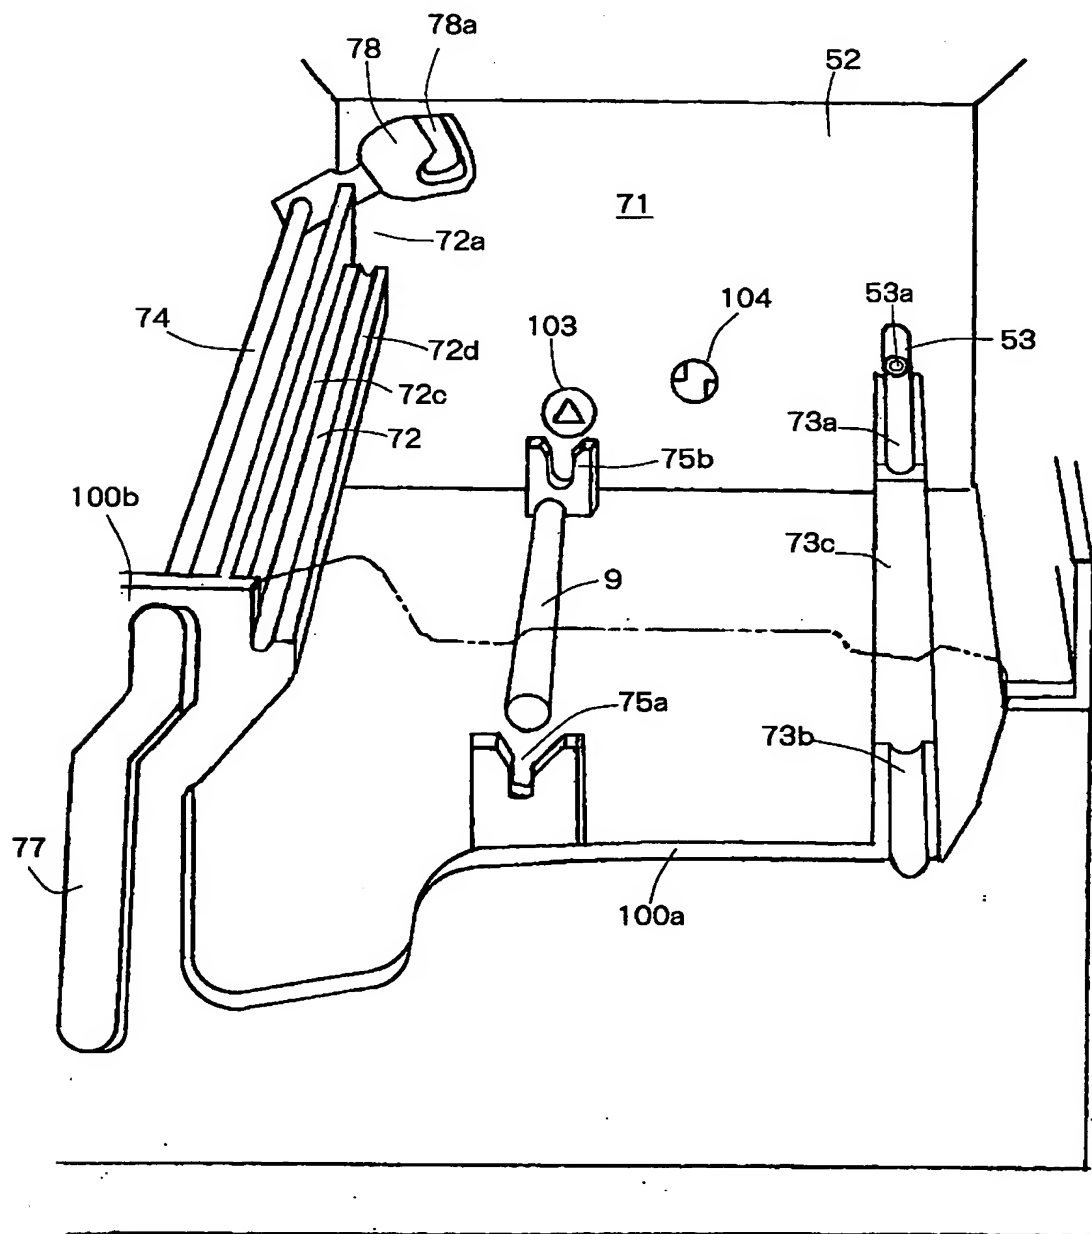


【図43】 Fig. 43

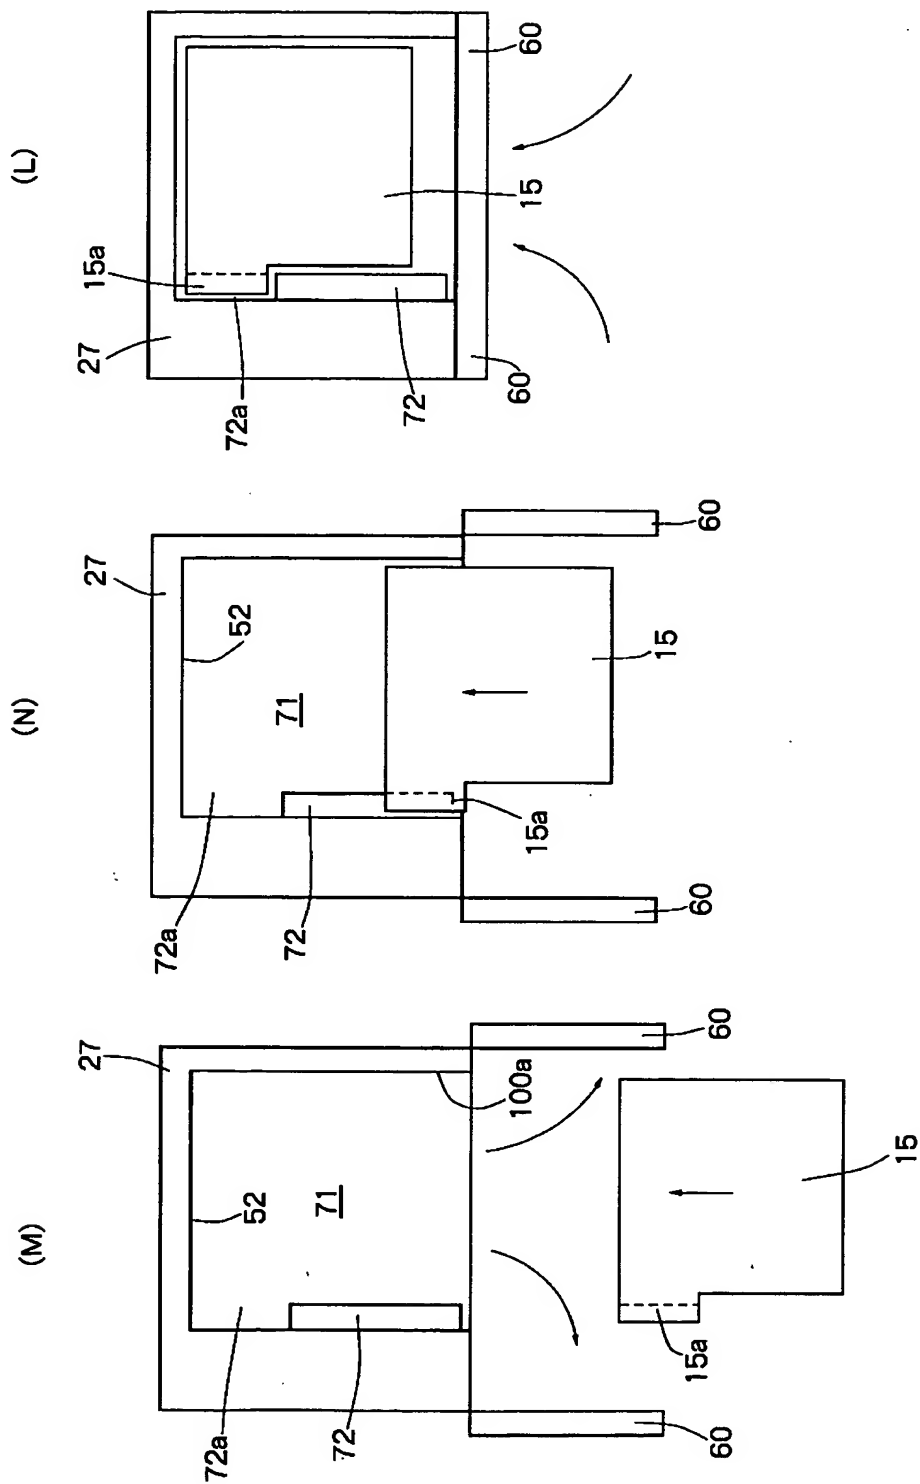


【図44】 Fig. 44

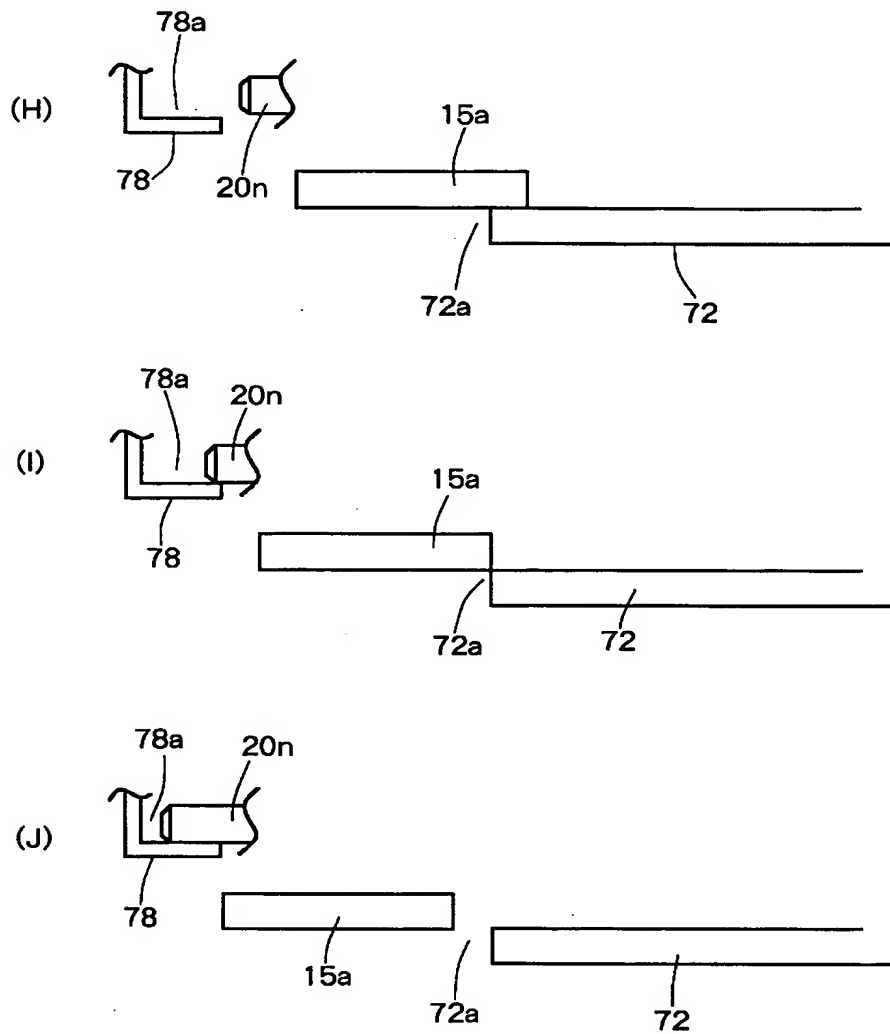


【図45】 Fig. 45

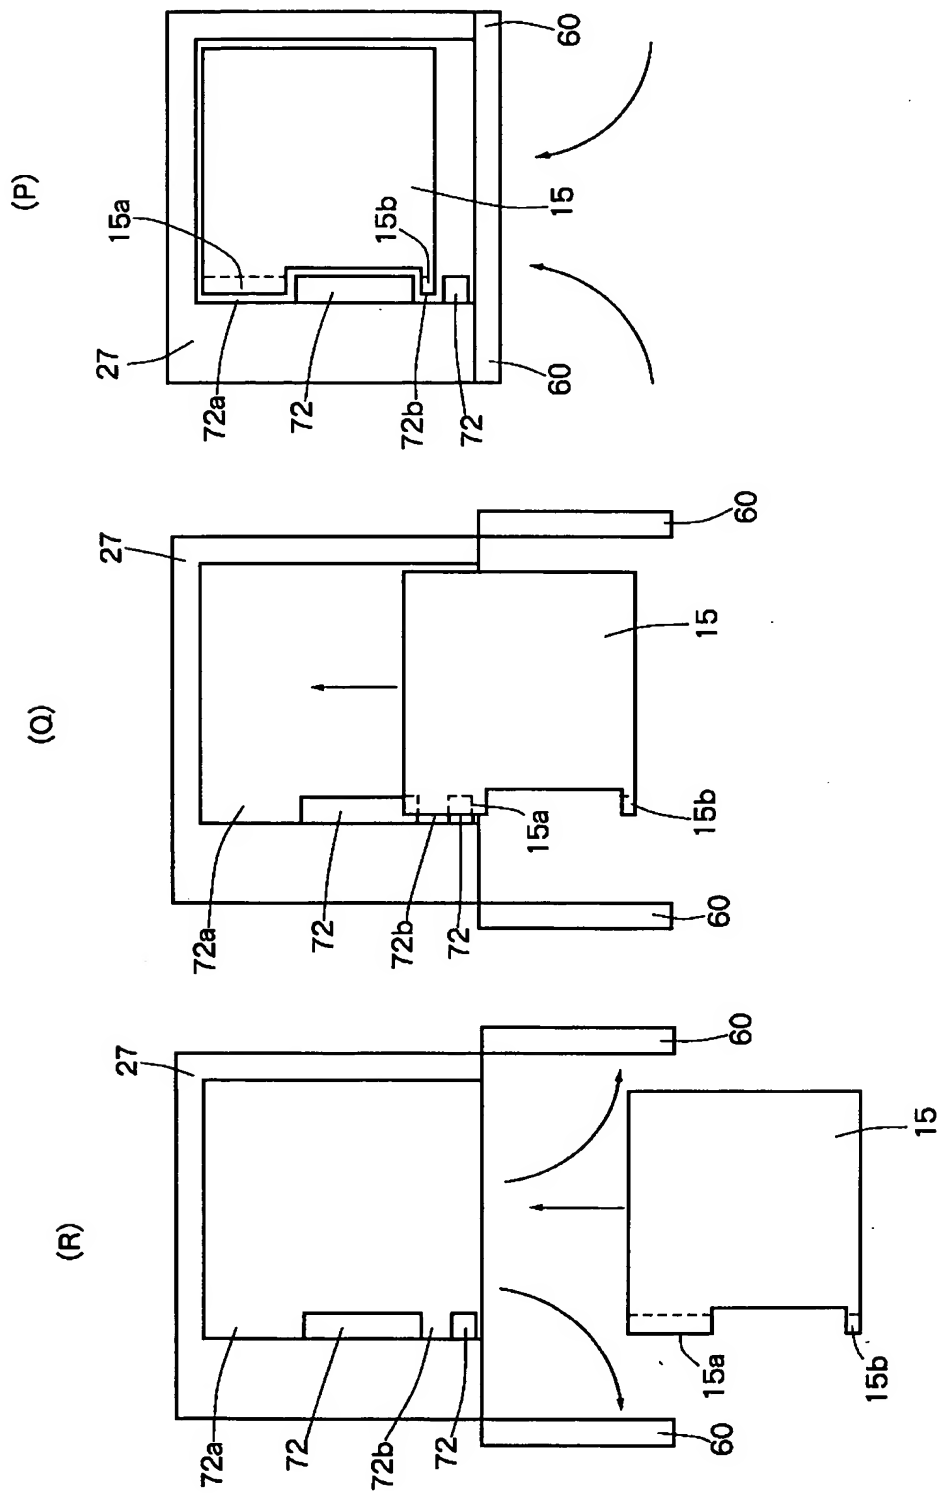


【図46】 Fig. 46

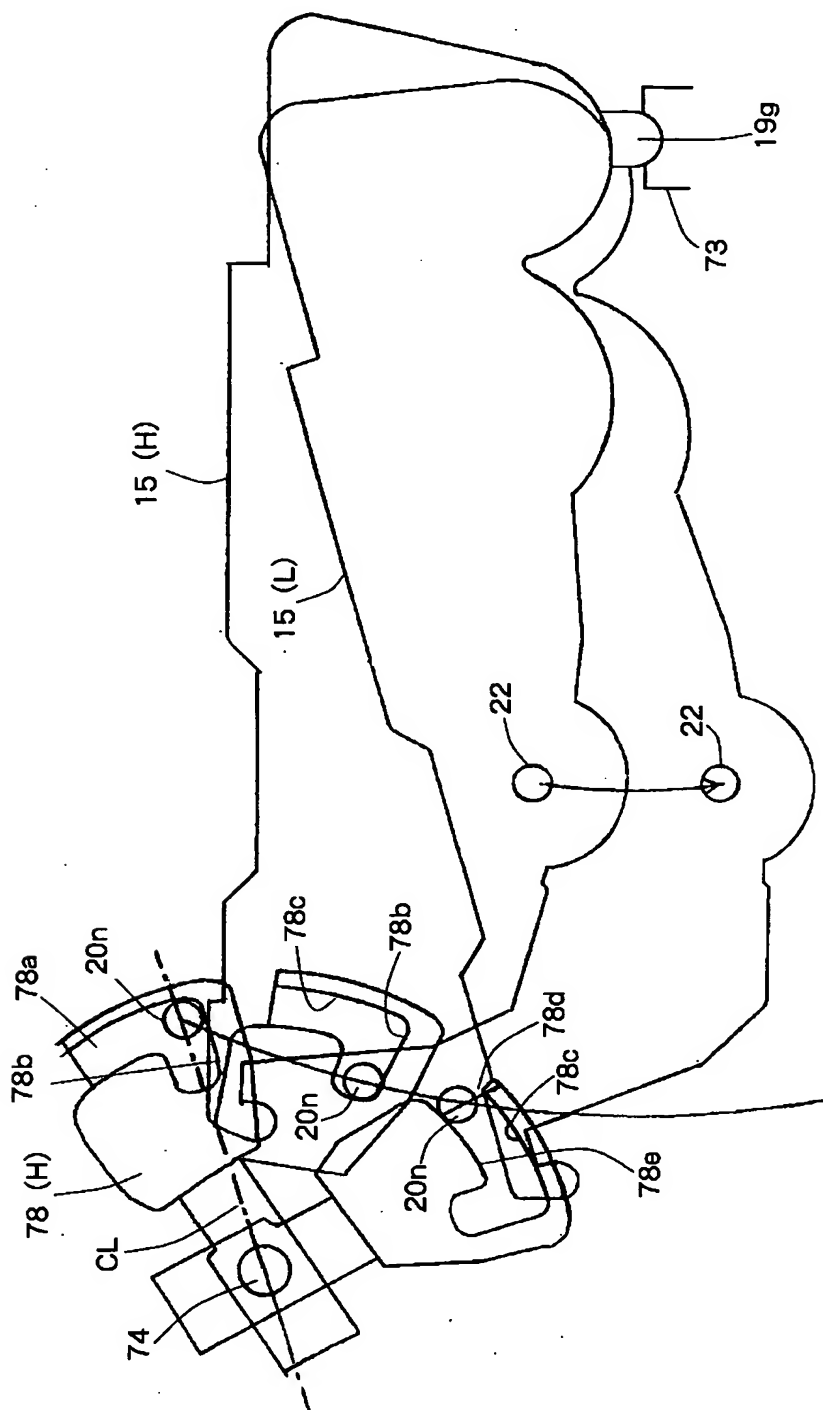

【図47】 Fig. 47

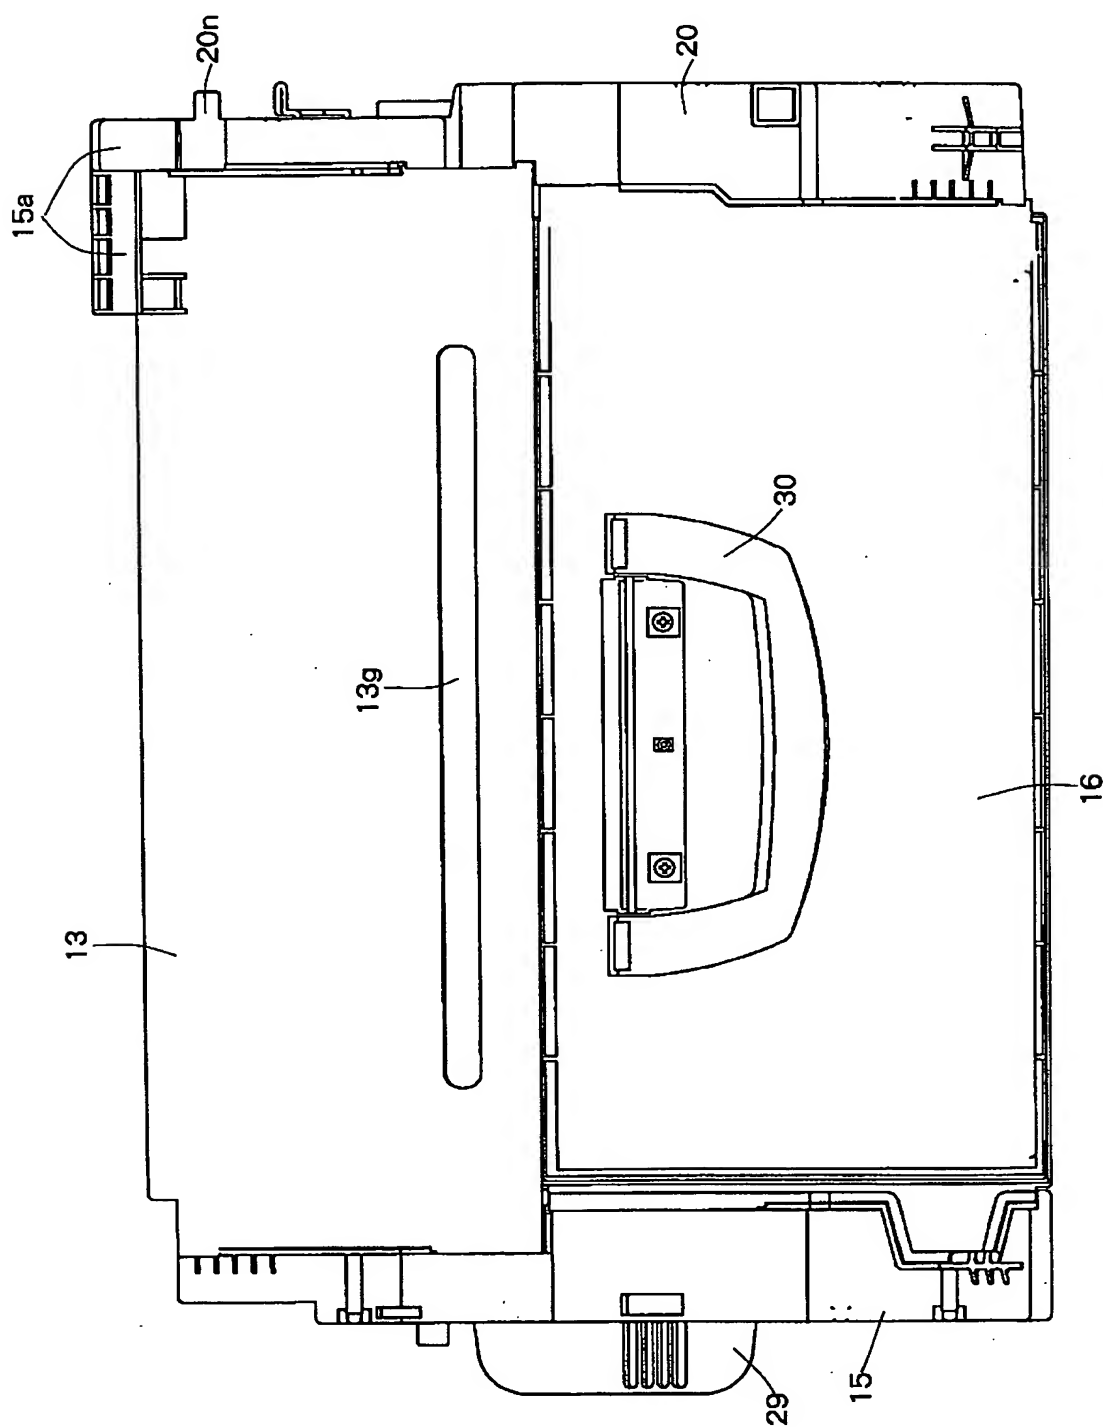

【図48】 Fig. 48

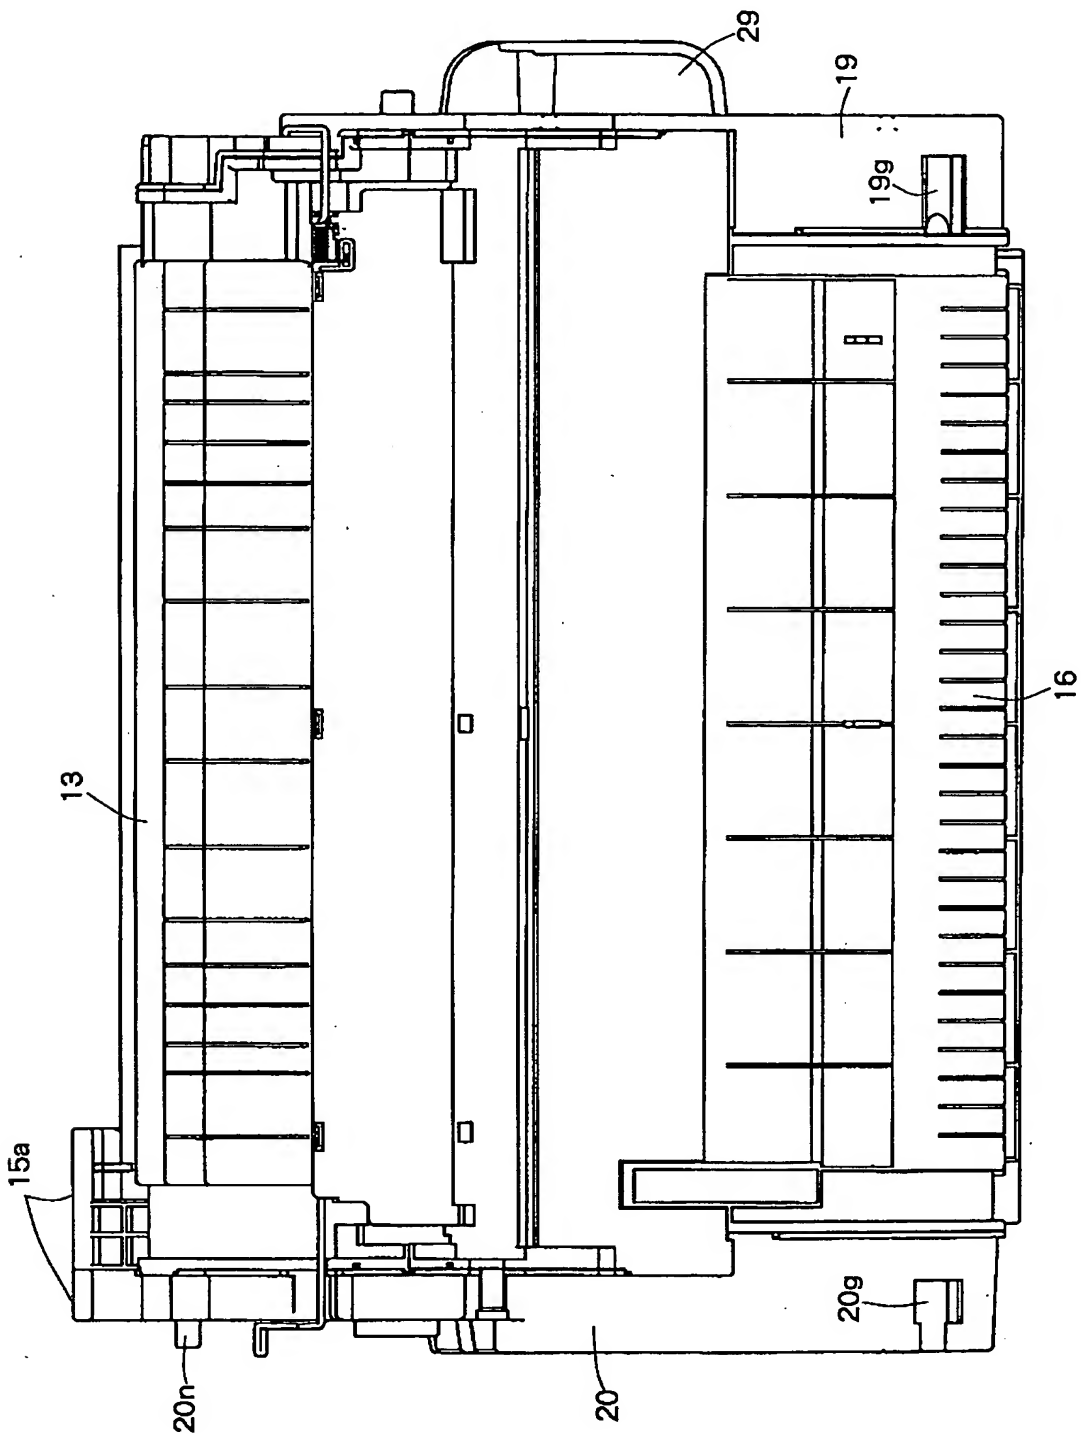

[Name of the Document] Abstract

[Abstract]

[Problem(s)] An object of the present invention is to achieve space saving, reduce the number of parts, and
5 make a pressurizing force between a photosensitive drum and a developing roller at an optimal value and thereby maintaining a constant space between the photosensitive drum and the developing roller, and another object is to simplify power supply means to a developing blade.

10 [Means for Solving the Problem(s)] A developing frame 17 and a cleaning frame 13 are rotatably connected by a pin 66, and a tension spring 36 is hooked between a hole 26g of a developing blade sheet metal 26 and a spring peg 13d of the cleaning frame 13. A straight
15 line portion 36c provided on the tension spring 36 is contacted to an unillustrated contact member provided on an end cover, and power is supplied to an external contact of this contact member from the apparatus main body. The contact member is also electrically
20 connected to an inner radius portion 18g of a developing roller.

[Elected Drawing] Fig. 20

2000-392334

Applicant s Information

Identification No. [000001007]

1. Date of Change: August 30, 1990

(Reason of Change) New Registration

Address: 3-30-2, Shimomaruko, Ohta-ku, Tokyo

Name: CANON KABUSHIKI KAISHA

2000-3000966